

TCT-2PAZZ1006MZ

RESISTANCE THERMOMETER



Transport of the second of the

Ordering information

| Туре | Part no. |
|-----------------|----------|
| TCT-2PAZZ1006MZ | 6081763 |

Other models and accessories → www.sick.com/TCT

Illustration may differ



Detailed technical data

Features

| Measuring range | -50 °C +150 °C |
|-----------------|----------------|
| Sensor element | Pt100 |
| Output signal | Pt100, 4-wire |

Mechanics/electronics

| Process connection | Without process connection |
|------------------------------------|---|
| Insertion length/diameter of probe | 100 mm / 6 mm |
| Wetted parts | Stainless steel 1.4571 |
| Housing material | Stainless steel 1.4571 |
| Connection type | M12 round connector x 1, 4-pin ¹⁾ |
| Enclosure rating | IP67 ²⁾ |
| Measuring current | 0.3 mA 1 mA |
| Electrical safety | Protection class: III, dielectric strength: 500 V |
| Protection class III | √ |
| RoHS certificate | ✓ |
| Weight | Ca. 145 g (depending on configuration) |
| Initialization time | < 10 ms |

¹⁾ The enclosure rating classes specified only apply while the thermometer is connected with female connectors that provide the corresponding enclosure rating.

Performance

| Accuracy of sensor element | Class A according to IEC 60751 |
|----------------------------|--|
| Transmitter accuracy | ≤ ± 1,0 % of span |
| Transmitter linearity | ≤ 0.1 % of span |
| Response time | T_{50} : $\leq 2.8 s^{(1)}$ $t_{90} \leq 9.1 s^{(1)}$ |

 $^{^{1)}}$ Depending on sensor configuration, according to IEC 60751.

 $^{^{2)}\, \}mbox{IP}$ enclosure rating as per IEC 60529.


Ambient data

| Ambient temperature | -40 °C +125 °C |
|---|----------------|
| Storage and transport temperature | -40 °C +85 °C |
| Shock resistance according to IEC 60751 | 500 g |
| Vibration resistance according to IEC 60751 | 3 g |

Classifications

| eCl@ss 5.0 | 27200208 |
|----------------|----------|
| eCl@ss 5.1.4 | 27200208 |
| eCl@ss 6.0 | 27200208 |
| eCl@ss 6.2 | 27200208 |
| eCl@ss 7.0 | 27200208 |
| eCl@ss 8.0 | 27200208 |
| eCl@ss 8.1 | 27200208 |
| eCl@ss 9.0 | 27200208 |
| eCl@ss 10.0 | 27200208 |
| eCl@ss 11.0 | 27200208 |
| eCl@ss 12.0 | 27200208 |
| ETIM 5.0 | EC002994 |
| ETIM 6.0 | EC002994 |
| ETIM 7.0 | EC002994 |
| ETIM 8.0 | EC002994 |
| UNSPSC 16.0901 | 41112211 |


Dimensional drawing (Dimensions in mm (inch))

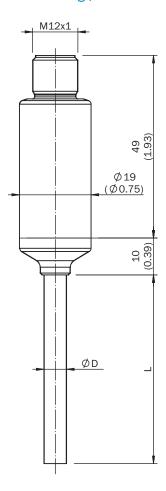

Housing, without process connection

Connection type

Round connector M12 x 1, output signal Pt100



SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is "Sensor Intelligence."

WORLDWIDE PRESENCE:

Contacts and other locations -www.sick.com

