



SceneSwitch LED Lamps

LED Scene Switch 40W B38 E14 WW CL ND 1BC/4

Some situations call for cool light, others benefit from the ambiance of a warm cozy glow. With Philips SceneSwitch LED lamps, you can have different light settings from just one bulb, candle or spot. And you don't need a dimmer! Optimize your lighting for relaxing, hobbies, recreation or working. Simply at the flick of a switch. And that's your existing switch! No extra installation is required.

Product data

General Information		
Cap-Base	E14 [E14]	
Nominal Lifetime (Nom)	15000 h	
Switching Cycle	100000X	
Technical Type Setting(s)	5.5/4/2-40 W	
Light Technical		
Color Code	827/825/822 [CCT of 2700K/2500K/2200K]	
Luminous Flux Setting(s)	470/190/50 lm	
Luminous Flux (Rated) Setting(s)	470/190/50 lm	
Color Designation	Warm/Extra Warm/Very Warm	
Correlated Color Temperature Setting(s)	2700/2500/2200 K	
Luminous Efficacy (rated) (Nom)	85 lm/W	
Color Consistency	<6	
Color Rendering Index (Nom)	80	
LLMF At End Of Nominal Lifetime (Nom)	70 %	

Operating and Electrical Input Frequency 50 to 60 Hz Power (Rated) Setting(s) 5.5/4/2 W Lamp Current (Nom) 50 mA Wattage Equivalent 40 W Starting Time (Nom) 0.5 s Warm Up Time To 60% Light (Nom) 0.5 s Power Factor (Nom) 0.5 Voltage (Nom) 220-240 V Temperature T-Case Maximum (Nom) 95 °C Controls and Dimming Dimmable No		
Power (Rated) Setting(s) 5.5/4/2 W Lamp Current (Norn) 50 mA Wattage Equivalent 40 W Starting Time (Nom) 0.5 s Warm Up Time To 60% Light (Norn) 0.5 s Power Factor (Norn) 0.5 Voltage (Norn) 220-240 V Temperature T-Case Maximum (Norn) 95 °C	Operating and Electrical	
Lamp Current (Nom) 50 mA Wattage Equivalent 40 W Starting Time (Nom) 0.5 s Warm Up Time To 60% Light (Nom) 0.5 s Power Factor (Nom) 0.5 Voltage (Nom) 220-240 V Temperature T-Case Maximum (Nom) 95 °C	Input Frequency	50 to 60 Hz
Wattage Equivalent 40 W Starting Time (Nom) 0.5 s Warm Up Time To 60% Light (Nom) 0.5 s Power Factor (Nom) 0.5 Voltage (Nom) 220-240 V Temperature T-Case Maximum (Nom) 95 °C Controls and Dimming 95 °C	Power (Rated) Setting(s)	5.5/4/2 W
Starting Time (Nom) Warm Up Time To 60% Light (Nom) 0.5 s Power Factor (Nom) 0.5 Voltage (Nom) 220-240 V Temperature T-Case Maximum (Nom) 95 °C	Lamp Current (Nom)	50 mA
Warm Up Time To 60% Light (Nom) 0.5 s Power Factor (Nom) 0.5 Voltage (Nom) 220-240 V Temperature T-Case Maximum (Nom) 95 °C	Wattage Equivalent	40 W
Power Factor (Nom) 0.5	Starting Time (Nom)	0.5 s
Voltage (Nom) 220-240 V Temperature T-Case Maximum (Nom) 95 °C Controls and Dimming	Warm Up Time To 60% Light (Nom)	0.5 s
Temperature T-Case Maximum (Nom) 95 °C Controls and Dimming	Power Factor (Nom)	0.5
T-Case Maximum (Nom) 95 °C Controls and Dimming	Voltage (Nom)	220-240 V
Controls and Dimming	Temperature	
<u> </u>	T-Case Maximum (Nom)	95 °C
Dimmable No	Controls and Dimming	
	Dimmable	No


Datasheet, 2017, May 26 data subject to change

SceneSwitch LED Lamps

Mechanical and Housing		
Bulb Finish	Clear	
Approval and Application		
Energy Saving Product	Yes	
Suitable For Accent Lighting	No	
Energy Efficiency Label (EEL)	A+	
Energy Consumption kWh/1000 h	6 kWh	
Product Data		
Full product code	871869659847400	


Order product name	LED Scene Switch 40W B38 E14 WW CL ND 1BC/4
EAN/UPC - Product	8718696598474
Order code	929001260801
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	4
Material Nr. (12NC)	929001260801
Net Weight (Piece)	0.068 kg


Dimensional drawing

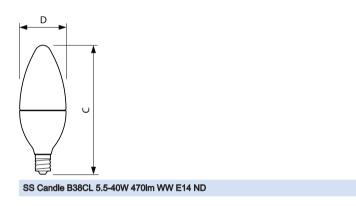

Product	D	С
LED Scene Switch 40W B38 E14 WW CL ND 1BC/4	38 mm	113 mm

Photometric data

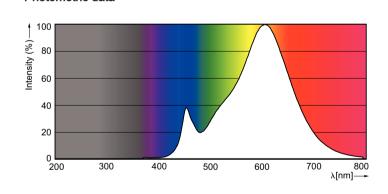



SceneSwitch LED Lamps

