


Part number

PE 1665 PV



Mobile socket outlet, PLUSO series, 3 poles + N + PE, 6 h (red), 16 A, 380 ÷ 415 V

Product description

Product type	Socket Mobile
Series	PE...PV, PLUSO
Connection type	Screw terminal connection
N. of poles	3 poles + N + 
Clock position	6

Technical data

Current	16 A
Voltage	380 ÷ 415 V
IP degree of protection	IP44

Further technical details

Weight	196,00 g
Operating temperature range (min, max)	-25°C ... +40°C

Material properties

Colour	RAL 7035 grey, RAL 3000 red
RoHs conformity	Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight
China RoHs - EFUP	50
REACH SVHC substances	Yes Lead
SCIP number	Ca7de37f-add8-4b77-9861-279c94903ade

Approvals / Standards

Reference standard	EN 60309-1 and -2
---------------------------	-------------------

General ordering information

EAN13 code	8015747064811
-------------------	---------------

Packaging Information

Packaging length	400,00 mm
Packaging height	300,00 mm
Packaging width	400,00 mm
Packaging weight	10,60 kg
Packaging volume	48,00 dm ³
Packaging description	Carton box
Packaging quantity	50 Pcs
Packaging EAN code	8015747064828


Part number

PE 1665 PV



Catalogue drawings

(16 / 32A) PE ... PV

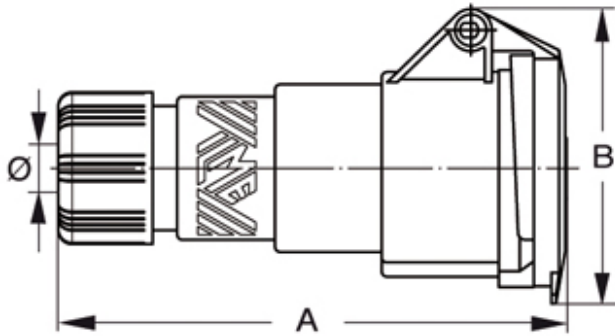

PE...PV	A	B	∅ min	∅ max
16A 2P+⊕	146	74,5	7	16
3P+⊕	146	84,5	7	16
3P+N+⊕	146	92,5	8	24
32A 2P+⊕	163	102	8	24
3P+⊕	163	102	8	24
3P+N+⊕	163	105	8	24

Notes

Dimensions shown in mm are not binding and may be changed without notice.