



Product designation	Undervoltage trip releases with early-make contacts
Product type designation	SM1X
Description	Undervoltage trip releases
Accessories for	SM1P...

**Auxiliary contact characteristics**

Type of contact		2NO
Rated insulation voltage $U_i$ IEC/EN	V	690
Rated impulse withstand voltage $U_{imp}$	kV	4
UL/CSA and IEC/EN 60947-5-1 designation		C600 - Q600
Min. conductivity		5V 10mA
Operating current AC15		
	24V	A 2.5
	48V	A 2.5
	60V	A 2.5
	110V	A 1.5
	230V	A 1.5
	400V	A 0.95
	500V	A 0.72
	690V	A 0.6

Operating current DC13		
	24V	A 2.5
	48V	A 2.5
	60V	A 2.5
	110V	A 0.55
	125V	A 0.55
	220V	A 0.27
	600V	A 0.1

**Operational characteristics**

Rated supply voltage AC	VAC	110
Rated frequency	Hz	50
In-rush consumption	VA	12
Holding consumption	VA	3.5
Release voltage	Us	35...70
Operating voltage	US	85...110


**Mechanical features**

Tightening torque for terminals		
	min	Nm 1
	max	Nm 1
	min	lbin 9
	max	lbin 9


Conductor section	AWG/Kcmil
-------------------	-----------

	min	18	
	max	14	
Flexible w/o lug conductor section	min	mm <sup>2</sup>	0.75
	max	mm <sup>2</sup>	2.5
Flexible c/w lug conductor section	min	mm <sup>2</sup>	0.75
	max	mm <sup>2</sup>	2.5
Operating position	normal allowable	Vertical Any	
Terminals	type screw width tool	mm	Screw M3.5 7.2 Ph2
Weight		g	130
<b>Operations</b>			
Mechanical life		cycles	100000
<b>Ambient conditions</b>			
Temperature	Operating temperature	min max	°C °C -20 +60
	Storage temperature	min max	°C °C -50 +80
Max altitude		m	3000
IEC degree of protection			IP20

**Dimensions**

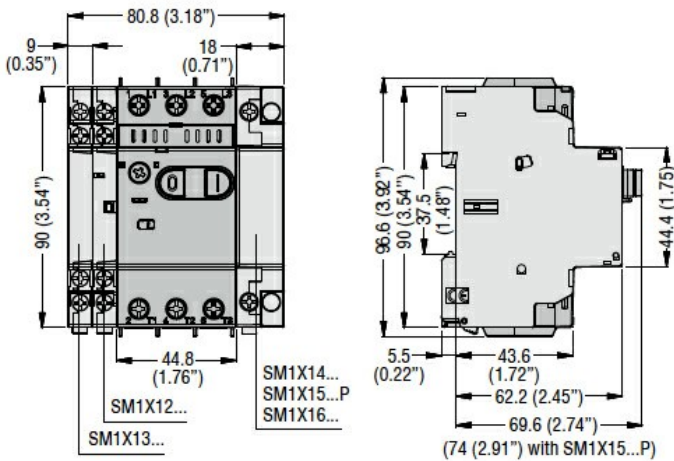

**Wiring diagrams**

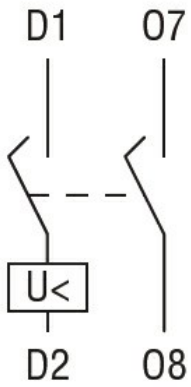

### Certifications and compliance

#### Compliance

CSA C22.2 n° 14

IEC/EN 60947-1

IEC/EN 60947-5-1

UL508

#### Certificates

cULus

EAC

### ETIM classification