



Power contactor
BF150

Product designation

Product type designation

Contact characteristics

| | | |
|--|---|--------|
| Number of poles | Nr. | 4 |
| Rated insulation voltage U_i IEC/EN | V | 1000 |
| Rated impulse withstand voltage U_{imp} | kV | 8 |
| Operational frequency | min | Hz 25 |
| | max | Hz 400 |
| IEC Conventional free air thermal current I_{th} | A | 165 |
| Operational current I_e | AC-1 ($\leq 40^\circ\text{C}$) | A 165 |
| | AC-1 ($\leq 55^\circ\text{C}$) | A 135 |
| | AC-1 ($\leq 70^\circ\text{C}$) | A 118 |
| | AC-3 ($\leq 440\text{V} \leq 55^\circ\text{C}$) | A 150 |
| | AC-4 (400V) | A 70 |
| Rated operational current AC-3 ($T \leq 55^\circ\text{C}$) | 230V | A 150 |
| | 400V | A 150 |
| | 415V | A 150 |
| | 440V | A 150 |
| | 500V | A 128 |
| | 690V | A 113 |
| | 1000V | A 51 |
| Rated operational power AC-1 ($T \leq 40^\circ\text{C}$) | 230V | kW 62 |
| | 400V | kW 110 |
| | 500V | kW 136 |
| | 690V | kW 187 |
| IEC max current I_e in DC1 with $L/R \leq 1\text{ms}$ with 1 poles in series | $\leq 24\text{V}$ | A 165 |
| | 48V | A 165 |
| | 75V | A 150 |
| | 110V | A 10 |
| | 220V | A – |
| IEC max current I_e in DC1 with $L/R \leq 1\text{ms}$ with 2 poles in series | $\leq 24\text{V}$ | A 165 |
| | 48V | A 165 |
| | 75V | A 165 |
| | 110V | A 150 |
| | 220V | A 14 |
| IEC max current I_e in DC1 with $L/R \leq 1\text{ms}$ with 3 poles in series | $\leq 24\text{V}$ | A 165 |
| | 48V | A 165 |
| | 75V | A 165 |

| | | | |
|--|-----------------|------------------|------|
| | 110V | A | 160 |
| | 220V | A | 150 |
| <hr/> | | | |
| IEC max current I _e in DC1 with L/R ≤ 1ms with 4 poles in series | | | |
| | ≤24V | A | 165 |
| | 48V | A | 165 |
| | 75V | A | 165 |
| | 110V | A | 165 |
| | 220V | A | 165 |
| <hr/> | | | |
| IEC max current I _e in DC3-DC5 with L/R ≤ 15ms with 1 poles in series | | | |
| | ≤24V | A | 165 |
| | 48V | A | 60 |
| | 75V | A | 44 |
| | 110V | A | 6 |
| | 220V | A | – |
| <hr/> | | | |
| IEC max current I _e in DC3-DC5 with L/R ≤ 15ms with 2 poles in series | | | |
| | ≤24V | A | 165 |
| | 48V | A | 82 |
| | 75V | A | 70 |
| | 110V | A | 80 |
| | 220V | A | 7 |
| <hr/> | | | |
| IEC max current I _e in DC3-DC5 with L/R ≤ 15ms with 3 poles in series | | | |
| | ≤24V | A | 165 |
| | 48V | A | 195 |
| | 75V | A | 110 |
| | 110V | A | 120 |
| | 220V | A | 120 |
| <hr/> | | | |
| IEC max current I _e in DC3-DC5 with L/R ≤ 15ms with 4 poles in series | | | |
| | ≤24V | A | 165 |
| | 48V | A | 130 |
| | 75V | A | 130 |
| | 110V | A | 150 |
| | 220V | A | 150 |
| <hr/> | | | |
| Short-time allowable current for 10s (IEC/EN60947-1) | | A | 1200 |
| <hr/> | | | |
| Protection fuse | | | |
| | gG (IEC) | A | 250 |
| | aM (IEC) | A | 160 |
| <hr/> | | | |
| Making capacity (RMS value) | | A | 1500 |
| <hr/> | | | |
| Breaking capacity at voltage | | | |
| | 440V | A | 1200 |
| | 500V | A | 1025 |
| | 690V | A | 905 |
| <hr/> | | | |
| Resistance per pole (average value) | | mΩ | 0.45 |
| <hr/> | | | |
| Power dissipation per pole (average value) | | | |
| | I _{th} | W | 12 |
| | AC-3 | W | 10.1 |
| <hr/> | | | |
| Tightening torque for terminals | | | |
| | min | Nm | 6 |
| | max | Nm | 7 |
| | min | I _{bin} | 35.4 |
| | max | I _{bin} | 44.3 |
| <hr/> | | | |
| Tightening torque for coil terminal | | | |
| | min | Nm | 0.8 |
| | max | Nm | 1 |

| | | | |
|---|------------------|------------------|-----------------------|
| | min | I _{bin} | 0.59 |
| | max | I _{bin} | 0.74 |
| Max number of wires simultaneously connectable | | Nr. | 2 |
| Conductor section | | | |
| AWG/Kcmil | | | |
| | max | | 2/0 |
| Flexible w/o lug conductor section | | | |
| | min | mm ² | 1.5 |
| | max | mm ² | 70 |
| Flexible c/w lug conductor section | | | |
| | min | mm ² | 1.5 |
| | max | mm ² | 70 |
| Power terminal protection according to IEC/EN 60529 | | | IP20 front |
| Mechanical features | | | |
| Operating position | normal allowable | | Vertical plan ±30° |
| Fixing | | | Screw / DIN rail 35mm |
| Weight | | g | 2460 |
| Conductor section | | | |
| AWG/kcmil conductor section | | | |
| | max | | 2/0 |
| Operations | | | |
| Mechanical life | | cycles | 15000000 |
| Electrical life | | cycles | 800000 |
| Safety related data | | | |
| Performance level B10d according to EN/ISO 13489-1 | | | |
| | rated load | cycles | 800000 |
| Mirror contacts according to IEC/EN 60947-4-1 | | | yes |
| EMC compatibility | | | yes |
| AC coil operating | | | |
| Rated AC voltage at 50/60Hz, 60Hz | | | |
| | min | V | 60 |
| | max | V | 110 |
| AC operating voltage | | | |
| of 50/60Hz coil powered at 50Hz | | | |
| pick-up | min | %Us | 80 Us min |
| | max | %Us | 110 Us max |
| drop-out | max | %Us | ≤70 Us min |
| of 50/60Hz coil powered at 60Hz | | | |
| pick-up | min | %Us | 80 Us min |
| | max | %Us | 110 Us max |
| drop-out | max | %Us | ≤70 Us min |
| AC average coil consumption at 20°C | | | |
| of 50/60Hz coil powered at 50Hz | | | |
| | in-rush | VA | 70...175 |
| | holding | VA | 1.7...3.5 |
| of 50/60Hz coil powered at 60Hz | | | |

| | | | |
|---|-----------------------|----------|------------------|
| | in-rush | VA | 70...175 |
| | holding | VA | 1.7...3.5 |
| of 60Hz coil powered at 60Hz | | | |
| | in-rush | VA | 70...175 |
| | holding | VA | 1.7...3.5 |
| Dissipation at holding $\leq 20^{\circ}\text{C}$ 50Hz | | W | 1.3...1.5 |
| DC coil operating | | | |
| DC rated control voltage | | | |
| | min | V | 60 |
| | max | V | 110 |
| DC operating voltage | | | |
| pick-up | min | %Us | 80 Us min |
| | max | %Us | 110 Us max |
| drop-out | max | %Us | ≤ 70 Us min |
| Average coil consumption $\leq 20^{\circ}\text{C}$ | | | |
| | in-rush | W | 70...80 |
| | holding | W | 1.3...1.5 |
| Max cycles frequency | | | |
| Mechanical operation | | cycles/h | 2000 |
| Operating times | | | |
| Average time for Us control | | | |
| in AC | | | |
| Closing NO | min | ms | 45 |
| | max | ms | 90 |
| Opening NO | min | ms | 24 |
| | max | ms | 60 |
| in DC | | | |
| Closing NO | min | ms | 45 |
| | max | ms | 90 |
| Opening NO | min | ms | 24 |
| | max | ms | 60 |
| UL technical data | | | |
| Yielded mechanical performance | | | |
| for three-phase AC motor | | | |
| | 200/208V | HP | 50 |
| | 220/230V | HP | 50 |
| | 460/480V | HP | 100 |
| | 575/600V | HP | 125 |
| General USE | | | |
| Contactor | | | |
| | AC current | A | 165 |
| Short-circuit protection fuse, 600V | | | |
| High fault | | | |
| | Short circuit current | kA | 100 |
| | Fuse rating | A | 200 |
| | Fuse class | | J |
| Standard fault | | | |
| | Short circuit current | kA | 10 |

| | | |
|-------------|---|-----|
| Fuse rating | A | 250 |
| Fuse class | | RK5 |

Ambient conditions

Temperature

Operating temperature

| | | |
|-----|----|-----|
| min | °C | -40 |
| max | °C | 70 |

Storage temperature

| | | |
|-----|----|-----|
| min | °C | -50 |
| max | °C | 80 |

Max altitude


| | |
|---|------|
| m | 3000 |
|---|------|

Resistance & Protection


Pollution degree

3

Dimensions

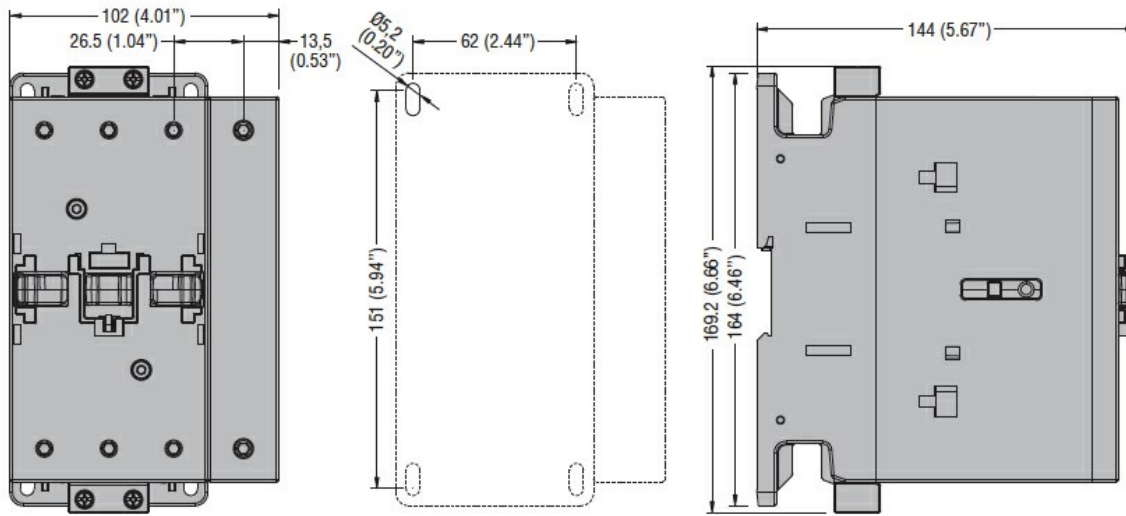

Wiring diagrams

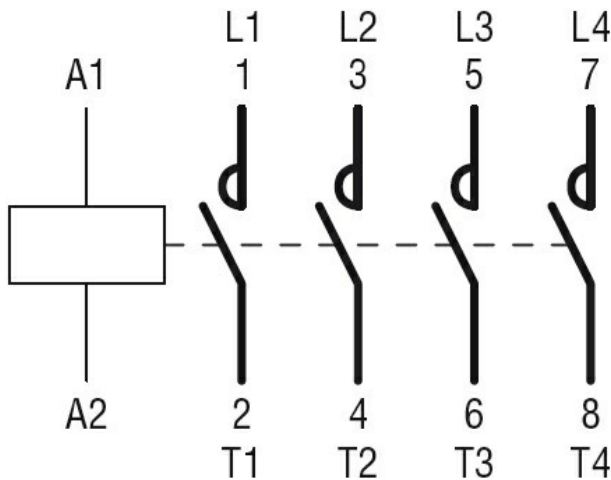

Certifications and compliance

Compliance

- CSA C22.2 n° 60947-1
- CSA C22.2 n° 60947-4-1
- IEC/EN/BS 60947-1
- IEC/EN/BS 60947-4-1
- UL 60947-1
- UL 60947-4-1

Certificates

CCC

cULus

EAC

ETIM classification

ETIM 8.0

EC000066 -
Power contactor,
AC switching