


PANDUIT P/N	WEIGHT
P30B13M	5.5kg


NOTES:

- IDENTIFICATION:


UNIT TYPE:	BASIC
ORIENTATION:	VERTICAL, MID
OUTLET QTY&TYPE:	(24)C13, (6)C19
BREAKER QTY&TYPE:	N/A
INPUT VOLTAGE:	200-240/346-415VAC, WYE
INPUT CURRENT:	16A
INPUT PHASE:	THREE-PHASE WYE
RATED POWER:	11.0kVA
INPUT PLUG:	IEC 60309 3P+N+E 6H 16A
INPUT CORD LENGTH:	3m [10']
- ACCESSORIES:
 - POCKET GUIDE
- RoHS COMPLIANT
- VISIT PANDUIT'S ON-LINE CATALOG AT WWW.PANDUIT.COM FOR ADDITIONAL PRODUCT INFORMATION CONTAINED IN THE SPECIFICATION SHEET AS WELL AS A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART
- MAXIMUM ALLOWABLE INPUT POWER = 11.0kW
- INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES

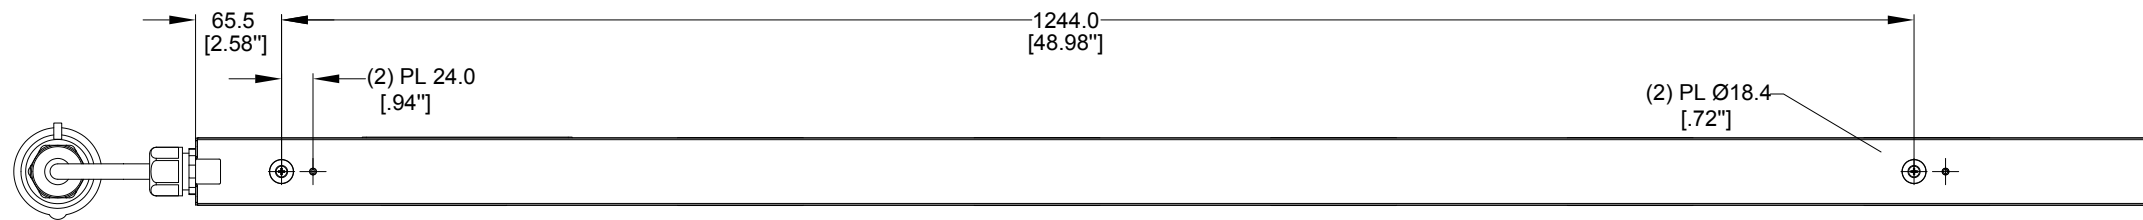


REAR VIEW

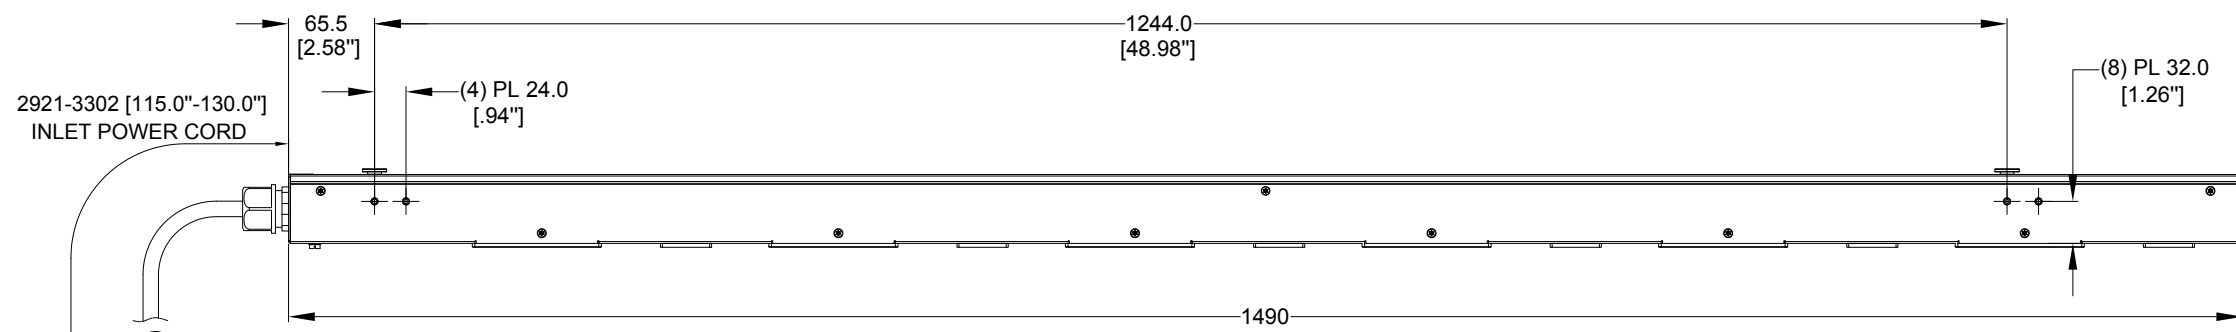


TOP VIEW

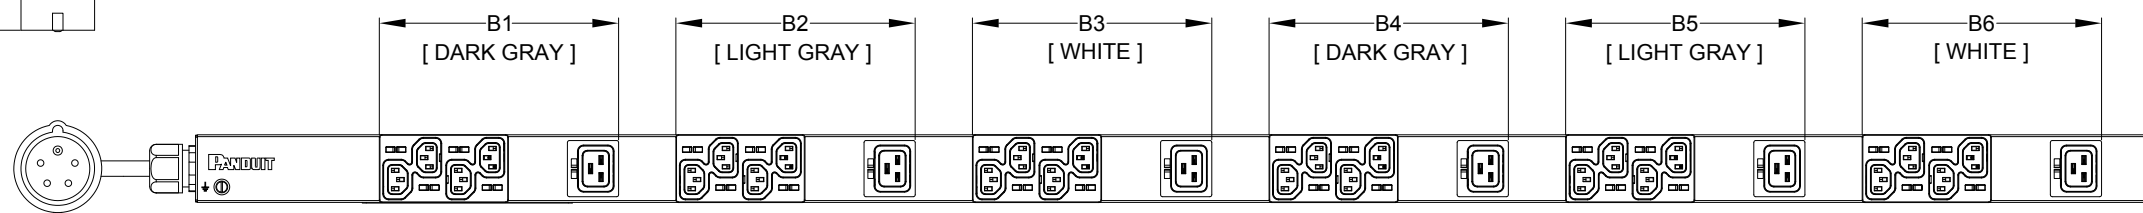


FRONT VIEW

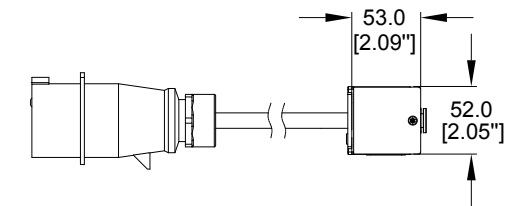


SIDE VIEW



PLUG
16 AMP, 230/400V x 3~ WYE
4P/5W
IEC 60309, SPLASHPROOF IP44
2Q (S); 4R (W), 6H



**SIX (6)
RECEPTACLES**
16 AMP, 250V
STRAIGHT BLADE
IEC 60320 / C19



**TWENTY-FOUR (24)
RECEPTACLES**
10 AMP, 250V
STRAIGHT BLADE
IEC 60320 / C13

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
01B	08/21/2017	DI.ZHAI	MIM	EDM	REVISED TOLERANCES	P30B13M
01A	06/28/2017	DI.ZHAI	MIM	EDM	INITIAL RELEASE	P30B13M

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY		SIGN
		DATE
		PRINT
TITLE BASIC SERIES PDU P30B13M CUSTOMER DRAWING		
ITEM REVISION NAME		
DATASHEET FILE NAME:		
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]		MATERIAL/COLOR:
Tolerance(mm) 04<L<50 ±0.5 50<L<250 ±1.0 250<L<500 ±1.5 500<L<1000 ±2.5 1000<L<2000 ±4.0		N/A
THIRD ANGLE PROJECTION		DRAWING NUMBER: P30B13M_DC
DRAWN BY: DI.ZHAI	DATE: 05/24/2017	SCALE: NONE
CHK: SEAN	SCALE: NONE	SHT 1 OF 1
		SCALE: B