

PRELIMINARY



Soraa Internal Report: IES LM79-08

Test results reported for:

Customer Reference P/N: SP30S-18-09D-827-03

Manufacturing P/N: SP30S-18-09D-827-03

Soraa PAR30S, E26/120V, 2700K, 80CRI, 18.5W, 9 degree

Relevant Standards

IES LM-79

ANSI C78.377

IES PR-16

Soraa Lamp Lab

1.0 Description of test sample

Customer reference ID	SP30S-18-09D-827-03
Manufacturer reference ID	SP30S-18-09D-827-03
Lamp description	Brilliant 2700K 80CRI 18.5W 9 degree
Rated voltage	120V
Rated power	18.5W
Nominal CCT	2700K




2.0 Results - Sphere Measurements

Test conditions	
Orientation	Horizontal
Stabilization time (min)	50-55
Correction factor applied	Self absorption correction
Sphere geometry	65" Sphere
	95% coating reflectance
	2pi geometry
Ambient temperature (°C)	25±1


Instrument				
	Instrument	Manufacture	Model	
Photometric	Spectrometer	Instrument systems	CAS 140T	
	Integrating sphere	Labsphere	65"	
	Standard lamp	Labsphere	CSFS-1400 lamp	
Electrical instrument	Power supply for standard lamp	Labsphere	LPS-150-0268	
	Power supply for aux lamp	Labsphere	LPS-100-0833	
	Power supply for test lamps	APT	Variplus 105	
	Power meter for test lamps	Chroma	66202	
Thermometer	Digital multimeter	YOKOGAWA	TY720	

Measurement results				
	Photometric		Electrical	
Total lumen (lm)	1149		Input voltage (V)	119.6
Luminous efficacy (lm/W)	64		Current (A)	0.152
Chromaticity coordinates	$u' = 0.2631$		Power (W)	18.0
	$v' = 0.5282$		pf	0.989
	$x = 0.4619$			
	$y = 0.4121$			
CCT (K)	2683			
CRI	83			
R9	8			
Duv				


Spectral power distribution

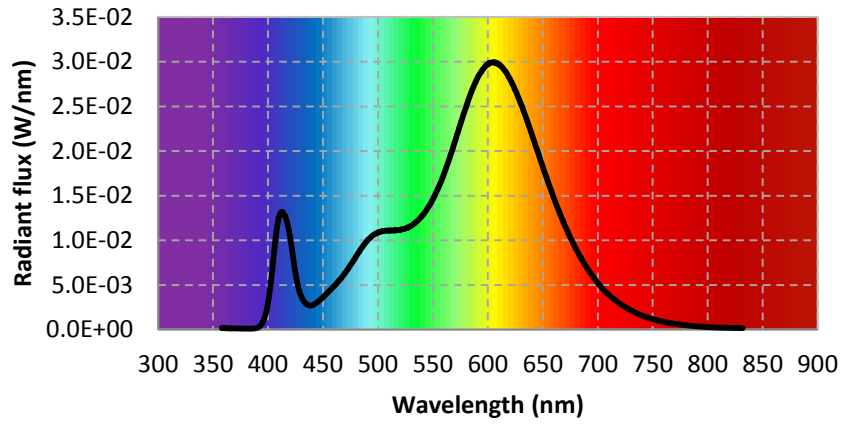

Chromaticity on CIE1931

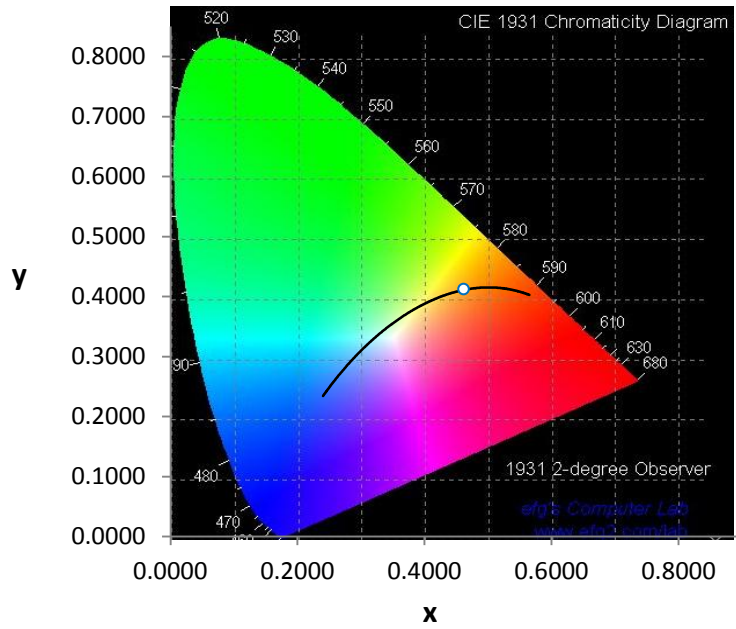

CRI	
R1	82
R2	94
R3	88
R4	81
R5	85
R6	97
R7	79
R8	56
R9	7
R10	91
R11	82
R12	91
R13	85
R14	93
Ra	83

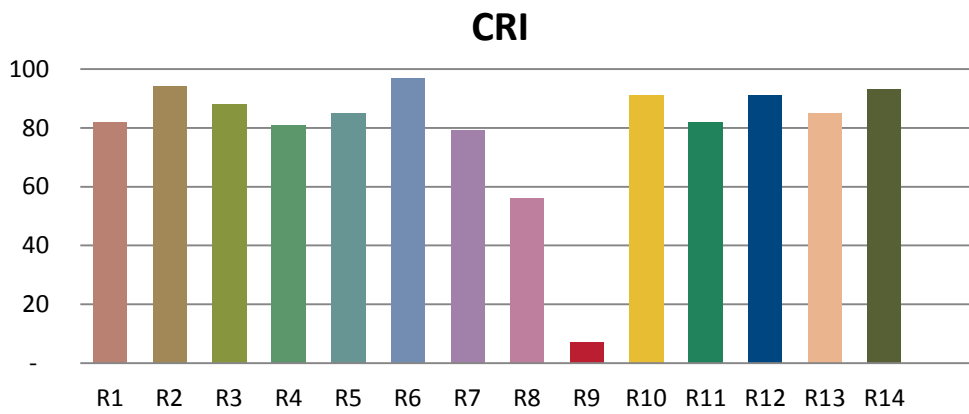

Spectral Power Distribution									
WL (nm)	SPD(W/nm)	WL (nm)	SPD(W/nm)	WL (nm)	SPD(W/nm)	WL (nm)	SPD(W/nm)	WL (nm)	SPD(W/nm)
380	1.17E-04	421	9.65E-03	462	5.10E-03	503	1.10E-02	544	1.34E-02
381	1.09E-04	422	8.82E-03	463	5.27E-03	504	1.10E-02	545	1.36E-02
382	1.14E-04	423	7.92E-03	464	5.40E-03	505	1.10E-02	546	1.38E-02
383	1.08E-04	424	7.06E-03	465	5.57E-03	506	1.11E-02	547	1.39E-02
384	1.08E-04	425	6.33E-03	466	5.66E-03	507	1.11E-02	548	1.41E-02
385	1.15E-04	426	5.64E-03	467	5.83E-03	508	1.11E-02	549	1.44E-02
386	1.16E-04	427	5.02E-03	468	6.01E-03	509	1.11E-02	550	1.46E-02
387	1.25E-04	428	4.55E-03	469	6.15E-03	510	1.11E-02	551	1.49E-02
388	1.43E-04	429	4.14E-03	470	6.33E-03	511	1.11E-02	552	1.51E-02
389	1.62E-04	430	3.79E-03	471	6.49E-03	512	1.11E-02	553	1.54E-02
390	1.94E-04	431	3.51E-03	472	6.68E-03	513	1.11E-02	554	1.56E-02
391	2.52E-04	432	3.29E-03	473	6.84E-03	514	1.11E-02	555	1.59E-02
392	3.29E-04	433	3.12E-03	474	7.04E-03	515	1.11E-02	556	1.62E-02
393	4.38E-04	434	2.96E-03	475	7.24E-03	516	1.11E-02	557	1.65E-02
394	5.77E-04	435	2.87E-03	476	7.40E-03	517	1.11E-02	558	1.68E-02
395	7.95E-04	436	2.78E-03	477	7.58E-03	518	1.11E-02	559	1.71E-02
396	1.03E-03	437	2.72E-03	478	7.77E-03	519	1.11E-02	560	1.74E-02
397	1.41E-03	438	2.69E-03	479	7.96E-03	520	1.11E-02	561	1.78E-02
398	1.81E-03	439	2.70E-03	480	8.18E-03	521	1.12E-02	562	1.81E-02
399	2.34E-03	440	2.72E-03	481	8.37E-03	522	1.12E-02	563	1.85E-02
400	3.00E-03	441	2.78E-03	482	8.56E-03	523	1.13E-02	564	1.88E-02
401	3.81E-03	442	2.83E-03	483	8.74E-03	524	1.13E-02	565	1.91E-02
402	4.71E-03	443	2.92E-03	484	8.95E-03	525	1.13E-02	566	1.95E-02
403	5.70E-03	444	3.00E-03	485	9.12E-03	526	1.14E-02	567	1.99E-02
404	6.77E-03	445	3.08E-03	486	9.28E-03	527	1.14E-02	568	2.03E-02
405	8.04E-03	446	3.19E-03	487	9.47E-03	528	1.15E-02	569	2.07E-02
406	9.20E-03	447	3.30E-03	488	9.62E-03	529	1.15E-02	570	2.11E-02
407	1.03E-02	448	3.41E-03	489	9.77E-03	530	1.16E-02	571	2.14E-02
408	1.13E-02	449	3.51E-03	490	9.93E-03	531	1.17E-02	572	2.19E-02
409	1.20E-02	450	3.62E-03	491	1.01E-02	532	1.18E-02	573	2.22E-02
410	1.26E-02	451	3.74E-03	492	1.02E-02	533	1.19E-02	574	2.26E-02
411	1.30E-02	452	3.86E-03	493	1.03E-02	534	1.20E-02	575	2.30E-02
412	1.31E-02	453	3.99E-03	494	1.04E-02	535	1.21E-02	576	2.34E-02
413	1.32E-02	454	4.10E-03	495	1.05E-02	536	1.22E-02	577	2.38E-02
414	1.30E-02	455	4.23E-03	496	1.06E-02	537	1.23E-02	578	2.42E-02
415	1.28E-02	456	4.36E-03	497	1.07E-02	538	1.24E-02	579	2.45E-02
416	1.26E-02	457	4.48E-03	498	1.08E-02	539	1.26E-02	580	2.48E-02
417	1.22E-02	458	4.61E-03	499	1.08E-02	540	1.27E-02	581	2.52E-02
418	1.17E-02	459	4.75E-03	500	1.09E-02	541	1.29E-02	582	2.56E-02
419	1.11E-02	460	4.84E-03	501	1.09E-02	542	1.30E-02	583	2.60E-02
420	1.04E-02	461	4.98E-03	502	1.10E-02	543	1.32E-02	584	2.63E-02

Spectral Power Distribution									
WL (nm)	SPD(W/nm)	WL (nm)	SPD(W/nm)	WL (nm)	SPD(W/nm)	WL (nm)	SPD(W/nm)	WL (nm)	SPD(W/nm)
585	2.66E-02	626	2.66E-02	667	1.25E-02	708	4.13E-03	749	1.23E-03
586	2.69E-02	627	2.62E-02	668	1.23E-02	709	4.02E-03	750	1.19E-03
587	2.72E-02	628	2.59E-02	669	1.20E-02	710	3.91E-03	751	1.15E-03
588	2.75E-02	629	2.56E-02	670	1.17E-02	711	3.80E-03	752	1.11E-03
589	2.77E-02	630	2.53E-02	671	1.14E-02	712	3.69E-03	753	1.09E-03
590	2.80E-02	631	2.50E-02	672	1.11E-02	713	3.58E-03	754	1.06E-03
591	2.83E-02	632	2.47E-02	673	1.09E-02	714	3.48E-03	755	1.02E-03
592	2.85E-02	633	2.43E-02	674	1.06E-02	715	3.38E-03	756	9.88E-04
593	2.87E-02	634	2.40E-02	675	1.03E-02	716	3.29E-03	757	9.63E-04
594	2.88E-02	635	2.36E-02	676	1.01E-02	717	3.20E-03	758	9.38E-04
595	2.91E-02	636	2.33E-02	677	9.84E-03	718	3.10E-03	759	9.13E-04
596	2.92E-02	637	2.29E-02	678	9.57E-03	719	3.01E-03	760	8.73E-04
597	2.94E-02	638	2.26E-02	679	9.35E-03	720	2.92E-03	761	8.64E-04
598	2.96E-02	639	2.22E-02	680	9.12E-03	721	2.85E-03	762	8.29E-04
599	2.96E-02	640	2.19E-02	681	8.87E-03	722	2.77E-03	763	8.13E-04
600	2.97E-02	641	2.15E-02	682	8.65E-03	723	2.68E-03	764	7.88E-04
601	2.98E-02	642	2.12E-02	683	8.41E-03	724	2.60E-03	765	7.64E-04
602	2.98E-02	643	2.08E-02	684	8.20E-03	725	2.53E-03	766	7.39E-04
603	2.99E-02	644	2.04E-02	685	7.99E-03	726	2.46E-03	767	7.21E-04
604	2.99E-02	645	2.01E-02	686	7.77E-03	727	2.38E-03	768	7.08E-04
605	2.99E-02	646	1.97E-02	687	7.56E-03	728	2.30E-03	769	6.74E-04
606	2.99E-02	647	1.93E-02	688	7.35E-03	729	2.24E-03	770	6.60E-04
607	2.99E-02	648	1.89E-02	689	7.16E-03	730	2.18E-03	771	6.39E-04
608	2.98E-02	649	1.86E-02	690	6.95E-03	731	2.12E-03	772	6.25E-04
609	2.98E-02	650	1.82E-02	691	6.77E-03	732	2.05E-03	773	6.04E-04
610	2.97E-02	651	1.79E-02	692	6.61E-03	733	1.99E-03	774	5.93E-04
611	2.96E-02	652	1.75E-02	693	6.40E-03	734	1.92E-03	775	5.69E-04
612	2.95E-02	653	1.72E-02	694	6.23E-03	735	1.87E-03	776	5.58E-04
613	2.94E-02	654	1.68E-02	695	6.06E-03	736	1.81E-03	777	5.40E-04
614	2.92E-02	655	1.65E-02	696	5.91E-03	737	1.76E-03	778	5.21E-04
615	2.90E-02	656	1.61E-02	697	5.73E-03	738	1.71E-03	779	5.05E-04
616	2.89E-02	657	1.58E-02	698	5.56E-03	739	1.64E-03	780	4.95E-04
617	2.87E-02	658	1.55E-02	699	5.40E-03	740	1.59E-03		
618	2.85E-02	659	1.51E-02	700	5.23E-03	741	1.55E-03		
619	2.83E-02	660	1.48E-02	701	5.10E-03	742	1.50E-03		
620	2.81E-02	661	1.45E-02	702	4.94E-03	743	1.45E-03		
621	2.78E-02	662	1.41E-02	703	4.79E-03	744	1.41E-03		
622	2.76E-02	663	1.38E-02	704	4.66E-03	745	1.38E-03		
623	2.74E-02	664	1.35E-02	705	4.53E-03	746	1.33E-03		
624	2.71E-02	665	1.32E-02	706	4.40E-03	747	1.29E-03		
625	2.68E-02	666	1.29E-02	707	4.24E-03	748	1.26E-03		



3.0 Results - Goniometric Measurements

Test conditions	
Goniometer distance (m)	1
Temperature (°C)	25±1
Stabilization time (min)	50

Instrument				
	Instrument	Manufacture	Model	
Photometric	Photometer and color meter	Minolta	CL-200A	
Electrical instrument	Power supply for test lamps	APT	Variplus 105	
	Power meter for test lamps	Chroma	66202	
Thermometer	Digital multimeter	YOKOGAWA	TY720	

Measurement results				
Photometric			Electrical	
Central beam candle power(cd)	21641		Input voltage (V)	119.6
Beam Angle (°)	10		Current (A)	0.152
Field Angle (°)	19		Power (W)	18.0260
Chromaticity coordinates	u'= 0.2631		pf	0.9890
	v'= 0.5282			
	x = 0.4619			
	y = 0.4121			
CCT (K)	2683			

Luminous intensity distribution

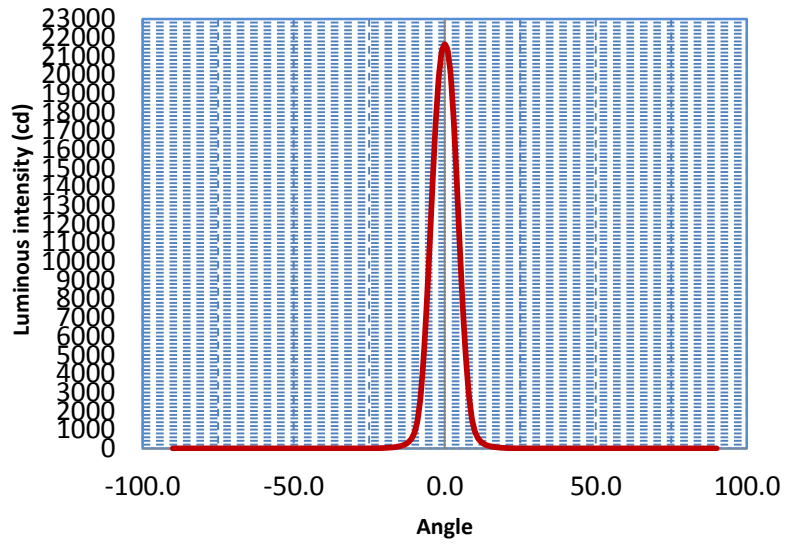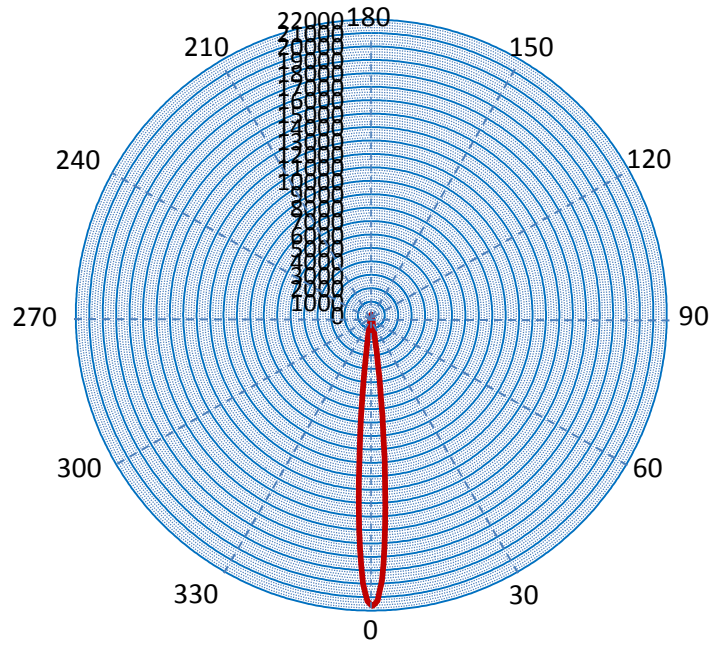

Zonal Lumen Tabulation					
Zones (°)	Lumens	%lamp	Zones (°)	Lumens	%lamp
0-5	669.5	58.3%	45-50	0.0	0.0%
5-10	411.4	35.8%	50-55	0.0	0.0%
10-15	52.0	4.5%	55-60	0.0	0.0%
15-20	13.0	1.1%	60-65	0.0	0.0%
20-25	2.9	0.3%	65-70	0.0	0.0%
25-30	0.4	0.0%	70-75	0.0	0.0%
30-35	0.0	0.0%	75-80	0.0	0.0%
35-40	0.0	0.0%	80-85	0.0	0.0%
40-45	0.0	0.0%	85-90	0.0	0.0%
Total lumen					1149

Accumulated Zonal Lumen Tabulation					
Zones (°)	Lumens	%lamp	Zones (°)	Lumens	%lamp
0-5	669.5	58.3%	0-50	1149.3	100.0%
0-10	1080.9	94.0%	0-55	1149.3	100.0%
0-15	1132.9	98.6%	0-60	1149.3	100.0%
0-20	1145.9	99.7%	0-65	1149.3	100.0%
0-25	1148.8	100.0%	0-70	1149.3	100.0%
0-30	1149.2	100.0%	0-75	1149.3	100.0%
0-35	1149.3	100.0%	0-80	1149.3	100.0%
0-40	1149.3	100.0%	0-85	1149.3	100.0%
0-45	1149.3	100.0%	0-90	1149.3	100.0%

Center and edge illuminance, beam and field diameter					
Distance (m)	E on axis (lx)	Beam D(m)	E on the edge of beam (lx)	Field D(m)	E on the edge of field (lx)
1.0	3657	0.33	1758	0.7	308
1.5	1626	0.49	781	1.0	137
2.0	914	0.65	440	1.4	77
2.5	585	0.81	281	1.7	49
3.0	406	0.98	195	2.1	34
3.5	299	1.14	144	2.4	25
4.0	229	1.30	110	2.8	19
4.5	181	1.47	87	3.1	15
5.0	146	1.63	70	3.5	12
5.5	121	1.79	58	3.8	10
6.0	102	1.95	49	4.2	9
6.5	87	2.12	42	4.5	7
7.0	75	2.28	36	4.9	6
7.5	65	2.44	31	5.2	5
8.0	57	2.61	27	5.6	5
8.5	51	2.77	24	5.9	4
9.0	45	2.93	22	6.3	4
9.5	41	3.09	19	6.6	3
10.0	37	3.26	18	7.0	3

Beam illuminance vs. distance



Luminous Intensity Distribution

Angle (°C)	CP (cd)	Angle (°C)	CP (cd)	Angle (°C)	CP (cd)	Angle (°C)	CP (cd)	Angle (°C)	CP (cd)
-90.0	0.0	-69.5	0.0	-49.0	0.0	-28.5	0.8	-8.0	2754.8
-89.5	0.0	-69.0	0.0	-48.5	0.0	-28.0	1.0	-7.5	3745.5
-89.0	0.0	-68.5	0.0	-48.0	0.0	-27.5	1.2	-7.0	4823.1
-88.5	0.0	-68.0	0.0	-47.5	0.0	-27.0	1.5	-6.5	6150.5
-88.0	0.0	-67.5	0.0	-47.0	0.0	-26.5	1.9	-6.0	7570.5
-87.5	0.0	-67.0	0.0	-46.5	0.0	-26.0	2.4	-5.5	9150.6
-87.0	0.0	-66.5	0.0	-46.0	0.0	-25.5	2.9	-5.0	10811.5
-86.5	0.0	-66.0	0.0	-45.5	0.0	-25.0	3.6	-4.5	12505.4
-86.0	0.0	-65.5	0.0	-45.0	0.0	-24.5	4.5	-4.0	14252.5
-85.5	0.0	-65.0	0.0	-44.5	0.0	-24.0	5.5	-3.5	15816.5
-85.0	0.0	-64.5	0.0	-44.0	0.0	-23.5	6.7	-3.0	17392.6
-84.5	0.0	-64.0	0.0	-43.5	0.0	-23.0	8.1	-2.5	18620.8
-84.0	0.0	-63.5	0.0	-43.0	0.0	-22.5	9.8	-2.0	19819.8
-83.5	0.0	-63.0	0.0	-42.5	0.0	-22.0	11.8	-1.5	20561.6
-83.0	0.0	-62.5	0.0	-42.0	0.0	-21.5	14.1	-1.0	21242.7
-82.5	0.0	-62.0	0.0	-41.5	0.0	-21.0	16.8	-0.5	21480.0
-82.0	0.0	-61.5	0.0	-41.0	0.0	-20.5	19.9	0.0	21641.5
-81.5	0.0	-61.0	0.0	-40.5	0.0	-20.0	23.5	0.5	21510.7
-81.0	0.0	-60.5	0.0	-40.0	0.0	-19.5	27.6	1.0	21303.7
-80.5	0.0	-60.0	0.0	-39.5	0.0	-19.0	32.2	1.5	20667.5
-80.0	0.0	-59.5	0.0	-39.0	0.0	-18.5	37.7	2.0	19969.1
-79.5	0.0	-59.0	0.0	-38.5	0.0	-18.0	43.8	2.5	18760.4
-79.0	0.0	-58.5	0.0	-38.0	0.0	-17.5	51.3	3.0	17522.3
-78.5	0.0	-58.0	0.0	-37.5	0.0	-17.0	59.7	3.5	15908.0
-78.0	0.0	-57.5	0.0	-37.0	0.0	-16.5	70.0	4.0	14307.3
-77.5	0.0	-57.0	0.0	-36.5	0.0	-16.0	81.7	4.5	12522.0
-77.0	0.0	-56.5	0.0	-36.0	0.0	-15.5	96.0	5.0	10792.2
-76.5	0.0	-56.0	0.0	-35.5	0.0	-15.0	112.2	5.5	9124.0
-76.0	0.0	-55.5	0.0	-35.0	0.0	-14.5	133.3	6.0	7537.2
-75.5	0.0	-55.0	0.0	-34.5	0.0	-14.0	157.2	6.5	6172.1
-75.0	0.0	-54.5	0.0	-34.0	0.1	-13.5	189.5	7.0	4894.5
-74.5	0.0	-54.0	0.0	-33.5	0.1	-13.0	225.9	7.5	3852.3
-74.0	0.0	-53.5	0.0	-33.0	0.1	-12.5	277.4	8.0	2892.7
-73.5	0.0	-53.0	0.0	-32.5	0.1	-12.0	335.6	8.5	2212.5
-73.0	0.0	-52.5	0.0	-32.0	0.1	-11.5	422.8	9.0	1595.1
-72.5	0.0	-52.0	0.0	-31.5	0.2	-11.0	520.9	9.5	1232.4
-72.0	0.0	-51.5	0.0	-31.0	0.2	-10.5	677.0	10.0	906.4
-71.5	0.0	-51.0	0.0	-30.5	0.3	-10.0	851.7	10.5	719.8
-71.0	0.0	-50.5	0.0	-30.0	0.4	-9.5	1155.1	11.0	553.2
-70.5	0.0	-50.0	0.0	-29.5	0.5	-9.0	1492.8	11.5	448.7
-70.0	0.0	-49.5	0.0	-29.0	0.6	-8.5	2093.0	12.0	355.9

Luminous Intensity Distribution

Angle (°C)	CP (cd)	Angle (°C)	CP (cd)	Angle (°C)	CP (cd)	Angle (°C)	CP (cd)		
12.5	293.9	33.0	0.1	53.5	0.0	74.0	0.0		
13.0	238.9	33.5	0.1	54.0	0.0	74.5	0.0		
13.5	200.2	34.0	0.1	54.5	0.0	75.0	0.0		
14.0	165.9	34.5	0.0	55.0	0.0	75.5	0.0		
14.5	140.4	35.0	0.0	55.5	0.0	76.0	0.0		
15.0	117.8	35.5	0.0	56.0	0.0	76.5	0.0		
15.5	100.6	36.0	0.0	56.5	0.0	77.0	0.0		
16.0	85.3	36.5	0.0	57.0	0.0	77.5	0.0		
16.5	72.8	37.0	0.0	57.5	0.0	78.0	0.0		
17.0	61.8	37.5	0.0	58.0	0.0	78.5	0.0		
17.5	52.8	38.0	0.0	58.5	0.0	79.0	0.0		
18.0	44.9	38.5	0.0	59.0	0.0	79.5	0.0		
18.5	38.2	39.0	0.0	59.5	0.0	80.0	0.0		
19.0	32.4	39.5	0.0	60.0	0.0	80.5	0.0		
19.5	27.4	40.0	0.0	60.5	0.0	81.0	0.0		
20.0	23.1	40.5	0.0	61.0	0.0	81.5	0.0		
20.5	19.4	41.0	0.0	61.5	0.0	82.0	0.0		
21.0	16.2	41.5	0.0	62.0	0.0	82.5	0.0		
21.5	13.5	42.0	0.0	62.5	0.0	83.0	0.0		
22.0	11.2	42.5	0.0	63.0	0.0	83.5	0.0		
22.5	9.2	43.0	0.0	63.5	0.0	84.0	0.0		
23.0	7.6	43.5	0.0	64.0	0.0	84.5	0.0		
23.5	6.3	44.0	0.0	64.5	0.0	85.0	0.0		
24.0	5.1	44.5	0.0	65.0	0.0	85.5	0.0		
24.5	4.2	45.0	0.0	65.5	0.0	86.0	0.0		
25.0	3.4	45.5	0.0	66.0	0.0	86.5	0.0		
25.5	2.8	46.0	0.0	66.5	0.0	87.0	0.0		
26.0	2.3	46.5	0.0	67.0	0.0	87.5	0.0		
26.5	1.8	47.0	0.0	67.5	0.0	88.0	0.0		
27.0	1.5	47.5	0.0	68.0	0.0	88.5	0.0		
27.5	1.2	48.0	0.0	68.5	0.0	89.0	0.0		
28.0	0.9	48.5	0.0	69.0	0.0	89.5	0.0		
28.5	0.7	49.0	0.0	69.5	0.0	90.0	0.0		
29.0	0.6	49.5	0.0	70.0	0.0				
29.5	0.5	50.0	0.0	70.5	0.0				
30.0	0.4	50.5	0.0	71.0	0.0				
30.5	0.3	51.0	0.0	71.5	0.0				
31.0	0.2	51.5	0.0	72.0	0.0				
31.5	0.2	52.0	0.0	72.5	0.0				
32.0	0.1	52.5	0.0	73.0	0.0				
32.5	0.1	53.0	0.0	73.5	0.0				