



Verification Services

Project No.: 4786480430-13
Report No.: 4786480430-13a
Report Issued Date: 2015-06-24



Test Report

Customer Company & Address:			
SORAA Inc ADD: 6500 Kaiser Dr, Fremont, CA 94555			
Contact Person:	Steve Yang		
Telephone:	510-4567183	Fax/Email Address:	SYang@soraa.com

Manufacturer:	SORAA Inc.
Country of Origin:	USA
Country of Export:	USA
Product Description:	Lamp Type: PAR30L LED Lamp Total Amount Of Light Source: 1 pc
Model Number:	SP30L-18-60D-830-03
Electrical Specification:	120 V AC, 60 Hz, 18.5W

Test Laboratory & Address:			
UL Verification Services (Guangzhou) Co., Ltd. ADD: Building A1, 1F & 2F, Nansha Science and Technology Innovation Center, No. 25, South Huanshi Avenue , Nansha District, Guangzhou 511458, China			
Telephone:	+86 20 28667188	Fax:	+86 20 83486605

Receipt of Test Samples :	2015-05-26	Test Period:	2015-05-26 ~ 2015-06-24
----------------------------------	------------	---------------------	-------------------------

Tested By	Approved By
 / Sam Tse	 / Sean Xiao
Test Personnel Name & Signatory	Approval Name & Signatory

The results reported herein have been performed in accordance with the laboratory's terms of accreditation. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report apply to the test sample(s) mentioned above at the time of the testing period only and are not to be used to indicate applicability to other similar products. This report does not imply that the product(s) has met the criteria for certification.



Test Report

Statement of Results

Test Flow	Test Method	Sample ID (Lab)	Sample Serial No.	Pass/Fail/NA
1.	Integrating Sphere Test	2128438-S001	N/A	Evaluate by customer
2.	Goniophotometer Test	2128438-S001	N/A	Evaluate by customer

Deviation from Test Method (if any)

N/A

Remark (if any)

This report shall not be used by the client to claim product endorsement by NVLAP, NIST or any agency of the US government.



Test Report

Test No. 1 : Integrating Sphere Test

Environmental Conditions

Temperature: 25.1° C

Test Equipment

Equipment ID	Equipment Name	Last Calibration Date	Calibration Due Date
GVS-LE-PE003	Integrating Sphere	Before Use	Before Use
GVS-LE-FS007	Measurement Standard Lamp	09/12/2014	09/11/2015

Test Sample

2128438-S001

Test Method

The sample was tested according to the IES LM-79-2008. Photometric parameters were measured using an integrating sphere, a spectroradiometer and software. The ambient temperature condition inside the sphere was maintained at 25° C ± 1° C. The sample measurements were made using a spectroradiometer connected by a fiber optic cable and detector through the detector port of the integrating sphere. The sample was operated at rated voltage and was stabilized before measurement. Chromaticity coordinates, correlated color temperature and color rendering index were calculated from the spectral radiant flux measurements taken at 1 nm intervals over the range of 380 to 780 nm.

Test Results

Test Type	Voltage (V AC)	Frequency (Hz)	Current (A)	Power (W)	Power Factor	Orientation	Operate time (Min.)	Stabilization time (Min.)
Input	119.95	60	0.1563	18.51	0.987	Base up	58	50

Test Type	CCT (K)	Luminous Flux (lm)	Color Rendering Index Ra	Luminous Efficacy (lm/W)
Output	2919	1373.4	85.3	74.2





Test Report

Test Condition

Temperature: 25.1°C
 Spectrum Range: 380-780 nm

RH: ----%
 Scan Step: 1 nm

Spectroradiometric Parameters

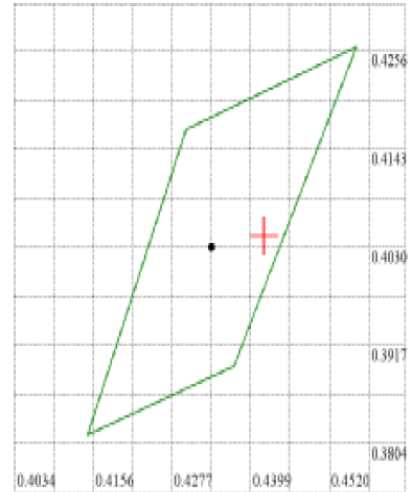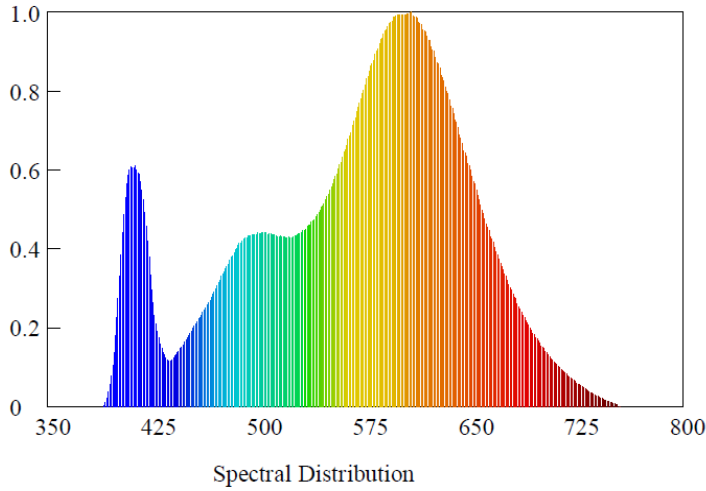

Nominal CCT:LED_3000K
 x0=0.4419 y0=0.4043

Chromaticity Coordinates: $x=0.4419$ $y=0.4043$ $u'=0.2537$ $v'=0.5222$
 Correlated Color Temperature: 2919 K Dominant Wavelength: 582.0 nm(E)
 Luminous Flux: 1373.357 lm Purity: 0.5415
 Chromaticity Difference: -0.00055Duv Peak Wavelength: 607.9 nm
 Color Ratio: $K_r=46.5\%$ $K_g=44.4\%$ $K_b=9.0\%$
 Bandwidth: 111.5nm Radiant Flux: 4.004 W
 Rendering Index: Ra=85.3
 R1=86 R2=97 R3=88 R4=85 R5=89 R6=97 R7=81 R8=60
 R9=16 R10=97 R11=87 R12=88 R13=90 R14=93 R15=76



Test Report

Test No.2: Goniophotometer Test

Environmental Conditions

Temperature: 25.1 °C

Test Equipment

Equipment ID	Equipment Name	Last Calibration Date	Calibration Due Date
GVS-LE-GS002	Goniophotometer	Before Use	Before Use
GVS-LE-FS007	Measurement Standard Lamp	09/11/2014	09/12/2015
GVS-LE-CA008	Digital Calliper	09/18/2014	09/17/2015

Test Sample

2128438-S001

Test Method

The sample was tested according to the IES LM-79-2008.
Photometric paramters were measured using a type C goniophotometer and software.
The ambient temperature shall be maintained at 25° C ± 1° C, measured at a point not more than 1 m from the sample and at the same height as the sample.
The samples were operated at rated voltage and was stabilized before measurement. Luminous flux, luminaire efficacy, zonal lumen were calculated from the software taken at 0.5° vertical intervals and 22.5° horizontal intervals.

Test Results

Test Type	Voltage (V AC)	Frequency (Hz)	Current (A)	Power (W)	Power Factor	Orientation	Opreate time (Min.)	Stabilization time (Min.)
Input	119.95	60	0.156	18.49	0.988	Base up	70	30

Test Type	Flux (lm)	Center Beam Candle Power (cd)	Field angle (10%)		Beam angle (50%)		Luminous Efficacy (lm/W)
			Horizontal Spread	Vertical Spread	Horizontal Spread	Vertical Spread	
Output	1378.4	1554	54.9	54.9	84.2	84.2	74.5




NVLAP Lab Code: 200952-0

Verification Services


Project No.: 4786480430-13
Report No.: 4786480430-13a
Report Issued Date: 2015-06-24

Test Report

Light Distribution Curve

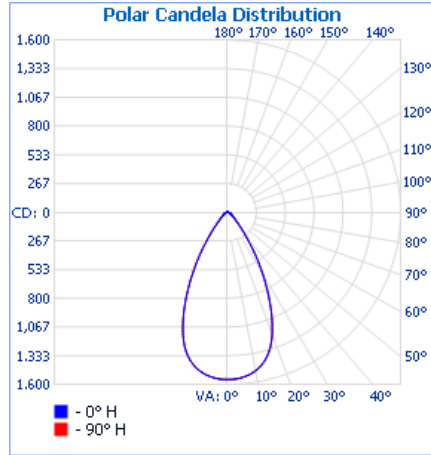

Isolux Plot

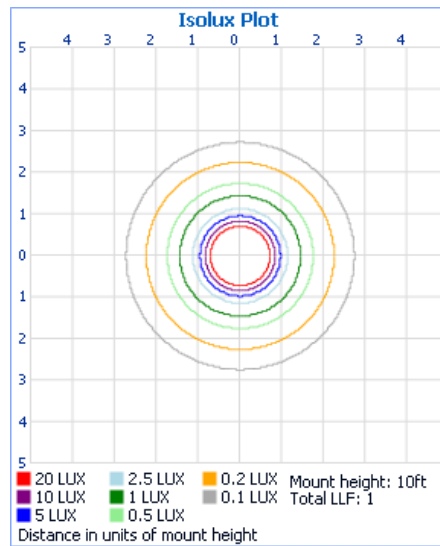



NVLAP Lab Code: 200952-0

Verification Services

Project No.: 4786480430-13
Report No.: 4786480430-13a
Report Issued Date: 2015-06-24

Test Report

Zonal Lumen Tabulation

Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	951.0	69%
0-40	1,189.5	86.3%
0-60	1,327.9	96.3%
60-90	50.0	3.6%
70-100	20.7	1.5%
90-120	0.0	0%
0-90	1,377.9	100%
90-180	0.5	0%
0-180	1,378.4	100%

Lumens Per Zone

Zone	Lumens	% Total	Zone	Lumens	% Total
0-5	37.0	2.7%	90-95	0.0	0%
5-10	108.6	7.9%	95-100	0.0	0%
10-15	171.6	12.5%	100-105	0.0	0%
15-20	214.8	15.6%	105-110	0.0	0%
20-25	223.2	16.2%	110-115	0.0	0%
25-30	195.7	14.2%	115-120	0.0	0%
30-35	146.1	10.6%	120-125	0.0	0%
35-40	92.4	6.7%	125-130	0.0	0%
40-45	55.4	4.0%	130-135	0.0	0%
45-50	35.9	2.6%	135-140	0.0	0%
50-55	26.5	1.9%	140-145	0.0	0%
55-60	20.6	1.5%	145-150	0.1	0%
60-65	16.2	1.2%	150-155	0.1	0%
65-70	13.1	0.9%	155-160	0.1	0%
70-75	10.3	0.7%	160-165	0.1	0%
75-80	7.0	0.5%	165-170	0.0	0%
80-85	3.0	0.2%	170-175	0.0	0%
85-90	0.4	0.0%	175-180	0.0	0%



NVLAP Lab Code: 200952-0

Verification Services

Project No.: 4786480430-13

Report No.: 4786480430-13a

Report Issued Date: 2015-06-24

Test Report


Intensity Data(cd)

Candela Table - Type C																	
	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5	360
0	1554	1554	1554	1554	1554	1554	1554	1554	1554	1554	1554	1554	1554	1554	1554	1554	1554
1	1554	1554	1554	1554	1554	1554	1554	1554	1554	1554	1554	1554	1554	1554	1554	1554	1554
2	1552	1552	1552	1552	1552	1552	1552	1552	1552	1552	1552	1552	1552	1552	1552	1552	1552
3	1550	1550	1550	1550	1550	1550	1550	1550	1550	1550	1550	1550	1550	1550	1550	1550	1550
4	1546	1546	1546	1546	1546	1546	1546	1546	1546	1546	1546	1546	1546	1546	1546	1546	1546
5	1541	1541	1541	1541	1541	1541	1541	1541	1541	1541	1541	1541	1541	1541	1541	1541	1541
6	1535	1535	1535	1535	1535	1535	1535	1535	1535	1535	1535	1535	1535	1535	1535	1535	1535
7	1527	1527	1527	1527	1527	1527	1527	1527	1527	1527	1527	1527	1527	1527	1527	1527	1527
8	1518	1518	1518	1518	1518	1518	1518	1518	1518	1518	1518	1518	1518	1518	1518	1518	1518
9	1507	1507	1507	1507	1507	1507	1507	1507	1507	1507	1507	1507	1507	1507	1507	1507	1507
10	1494	1494	1494	1494	1494	1494	1494	1494	1494	1494	1494	1494	1494	1494	1494	1494	1494
11	1480	1480	1480	1480	1480	1480	1480	1480	1480	1480	1480	1480	1480	1480	1480	1480	1480
12	1462	1462	1462	1462	1462	1462	1462	1462	1462	1462	1462	1462	1462	1462	1462	1462	1462
13	1442	1442	1442	1442	1442	1442	1442	1442	1442	1442	1442	1442	1442	1442	1442	1442	1442
14	1421	1421	1421	1421	1421	1421	1421	1421	1421	1421	1421	1421	1421	1421	1421	1421	1421
15	1393	1393	1393	1393	1393	1393	1393	1393	1393	1393	1393	1393	1393	1393	1393	1393	1393
16	1365	1365	1365	1365	1365	1365	1365	1365	1365	1365	1365	1365	1365	1365	1365	1365	1365
17	1331	1331	1331	1331	1331	1331	1331	1331	1331	1331	1331	1331	1331	1331	1331	1331	1331
18	1293	1293	1293	1293	1293	1293	1293	1293	1293	1293	1293	1293	1293	1293	1293	1293	1293
19	1250	1250	1250	1250	1250	1250	1250	1250	1250	1250	1250	1250	1250	1250	1250	1250	1250
20	1205	1205	1205	1205	1205	1205	1205	1205	1205	1205	1205	1205	1205	1205	1205	1205	1205
25	926	926	926	926	926	926	926	926	926	926	926	926	926	926	926	926	926
30	631	631	631	631	631	631	631	631	631	631	631	631	631	631	631	631	631
35	375	375	375	375	375	375	375	375	375	375	375	375	375	375	375	375	375
40	201	201	201	201	201	201	201	201	201	201	201	201	201	201	201	201	201
50	72	72	72	72	72	72	72	72	72	72	72	72	72	72	72	72	72
55	52	52	52	52	52	52	52	52	52	52	52	52	52	52	52	52	52
60	38	38	38	38	38	38	38	38	38	38	38	38	38	38	38	38	38
65	29	29	29	29	29	29	29	29	29	29	29	29	29	29	29	29	29
70	23	23	23	23	23	23	23	23	23	23	23	23	23	23	23	23	23
75	16	16	16	16	16	16	16	16	16	16	16	16	16	16	16	16	16
80	9	9	9	9	9	9	9	9	9	9	9	9	9	9	9	9	9
85	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2
90	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
95	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
100	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
105	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
110	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
115	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
120	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
125	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
130	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
135	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
140	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
145	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
150	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
155	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
160	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
165	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
170	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
175	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
180	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0



Test Report

Photos of sample

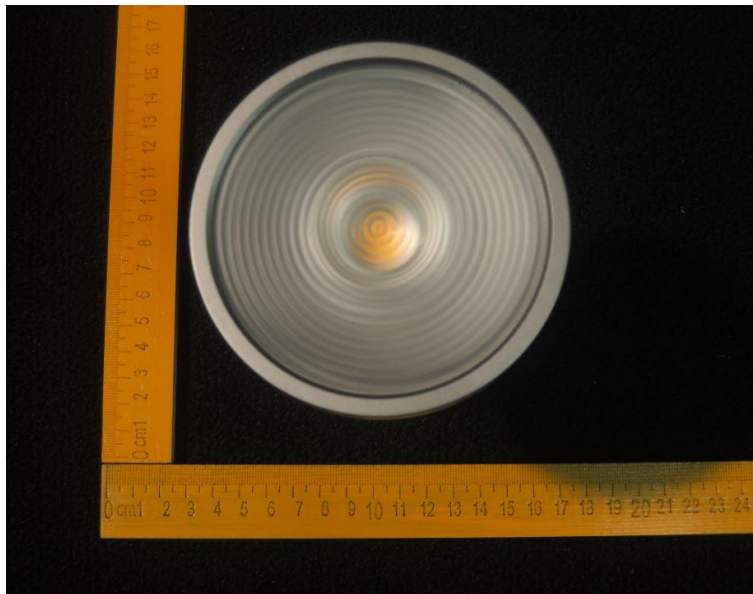

*******END OF TEST REPORT*******