

Test Report

Report No.: AJFS2404004050FF

Date: MAY 08, 2024

Page 1 of 6

Sample Description: EUROTECH BANNER 451818FR FRONTLIT 450

Color: WHITE

Style/Item No.: S-TFW111818 450 gsm

The above sample(s) was / were submitted and identified on behalf of the client. SGS is not responsible for the authenticity, integrity and results of the data and information and / or the validity of the conclusion arising therefrom. Results apply to the sample as received.

Test Requested:

DIN 4102-1:1998-05 Fire behaviour of building materials and building components, Part 1: Classification of building materials, Requirements and testing, Class B1 materials---For all materials except flooring.

Test Results: -- See attached sheet --

Classification: The tested sample **meets** class **B1** materials requirements of DIN 4102-1:1998-05.

Test Period:

Sample Receiving Date : APR.17, 2024

Test Performing Date : APR.17, 2024 TO MAY 06, 2024

Signed for and on behalf of

SGS-CSTC Standards Technical Services Co., Ltd. Anji Branch

Echo

Echo Li

Approved Signatory

Scan to see the report



AJFS2404004050FF

Verification:
check.sgsonline.com.cn



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing/inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Qaccheck@sgs.com

No. 301, Sunlight Road, 2 Block, Sunlight Industry Zone, Anji County, Zhejiang Province, China 313300 t (86-572) 501825 f (86-572) 501829 www.sgs.com.cn
中国·浙江·安吉县阳光工业园二区阳光大道301号 邮编: 313300 t (86-572) 501825 f (86-572) 501829 sgs.china@sgs.com

Test Report

Report No.: AJFS2404004050FF

Date: MAY 08, 2024

Page 2 of 6

I. Test conducted

This test was conducted as per DIN 4102-15:1990 Fire behaviour of building materials and building components – ‘Brandschacht’ apparatus, DIN 4102-16:2021 Fire behaviour of building materials and building components– ‘Brandschacht’ tests and DIN 4102-1:1998-05 Clause 6.2.5, and Classification according to DIN 4102-1:1998-05 Clause 6.1 Class B1 materials.

II. Sample details

General description	PVC Banner (provided by client)
Color	White
Area Density	450 g/m ²
Size of sample	190mm×1000mm & 190mm×90mm & 230mm×90mm
Exposed (tested) surface	Smooth surface

Conditioning

Prior to testing, the sample was conditioned at least 14 days to constant mass at a temperature of 23 ± 2 °C, and a relative humidity of 50 ± 5 %.

III. Test results

1) “Brandschacht” Test according to DIN 4102-15 &16

Results of “Brandschacht” Test (part 1)				
Line No.	Unit	Test direction		
		Lengthwise	Widthwise	
1	Specimen fixings according to DIN 4102 part 15, table	/	/	/
2	Max. flame height above lower sample edge;	cm	40	40
3	Time ¹⁾	min:s	00:39	00:45
4	<u>Melting/burning through</u>	Yes	Yes	
	Time ¹⁾	min:s	00:04	00:03
5	<u>Back of specimen</u>	Yes	Yes	
	Flaming/glowing, Time ¹⁾	min:s	00:04	00:03
6	Discolouring, Time ¹⁾	min:s	00:02	00:02
7	<u>Burning droplets</u>	Yes	Yes	
	Begin ¹⁾	min:s	00:10	00:12
	<u>Amount</u>	/	/	/
8	Specimen material falling off in separate droplets	√	√	
9	Specimen material falling off continuously	/	/	



Test Report

Report No.: AJFS2404004050FF

Date: MAY 08, 2024

Page 3 of 6

Results of "Brandschacht" Test (part 2)			
Line No.	Unit	Test direction	
		Lengthwise	Widthwise
	<u>Burning parts</u>	No	No
10	Begin 1)	/	/
11	Parts of sample falling off separately	/	/
12	Parts of sample falling off continuously	/	/
13	Duration of continued combustion on mesh base (max.)	No	No
	<u>Burner flame impairment by dripping/falling material</u>	No	No
14	Time ¹⁾	/	/
	<u>Premature ending of test</u>	/	/
15	End of burning at specimen ¹⁾	/	/
16	Time when test terminated (if applicable) ¹⁾	/	/
	<u>Burning after end of test</u>	No	No
17	Duration	/	/
18	Number of specimens	/	/
19	Front of specimen	/	/
20	Back of specimen	/	/
21	Height of flame	/	/
	<u>Glowing after end of test</u>	No	No
22	Duration	/	/
23	Number of specimens	/	/
24	Front of specimen	/	/
25	Back of specimen	/	/
26	Top half of specimen	/	/
27	Bottom half of specimen	/	/
	<u>Smoke density</u>	Yes	Yes
28	≤ 400 %xmin	√	√
29	> 400 %xmin	/	/



Test Report

Report No.: AJFS2404004050FF

Date: MAY 08, 2024

Page 4 of 6

Results of “Brandschacht” Test (part 3)						
Line No.		Unit	Test direction			
			Lengthwise		Widthwise	
30	<u>Residual length</u>	cm	/		/	
	61		63	63	64	
	64		63	64	65	
31	Average of the single results	cm	62.8		64.0	
	<u>Smoke temperature</u>		/		/	
32	Max. of average	°C	131.7		128.6	
33	Time ¹⁾	min:s	04:11		03:53	

Note: ¹⁾ time from start of testing

*Reduction in number of test (*DIN 4102 Part 16, clause 5.2*)

Class B1 materials:

If the residual length measured after the first test is 45cm or greater, further tests are not required.

2) Ignitibility test according to DIN 4102-1 Clause 6.2.5

a) Surface ignition

Fire application time: 15s

Parameter	Lengthwise					Widthwise				
	1	2	3	4	5	6	7	8	9	10
Whether or not flaming extinguished before reach the gauge mark (Yes/No)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Whether or not flaming reach the measuring mark within 20 seconds (Yes/No)	No	No	No	No	No	No	No	No	No	No
Time for the flame tip to reach the gauge mark (s)	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Afterflame time (s)	6	4	5	6	7	5	5	3	6	5
Max. flame height (cm)	13	11	10	12	12	11	13	11	12	11
Molten dripping (Yes/No)	No	No	No	No	No	No	No	No	No	No
Smoke developments (visual impression)	Slight					Slight				



Test Report

Report No.: AJFS2404004050FF

Date: MAY 08, 2024

Page 5 of 6

b) Edge ignition

Fire application time: 15s

Parameter	Lengthwise					Widthwise				
	1	2	3	4	5	6	7	8	9	10
Whether or not flaming extinguished before reach the gauge mark (Yes/No)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Whether or not flaming reach the measuring mark within 20 seconds (Yes/No)	No	No	No	No	No	No	No	No	No	No
Time for the flame tip to reach the gauge mark (s)	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Afterflame time (s)	3	5	4	2	3	2	4	4	3	3
Max. flame height (cm)	13	14	10	11	10	12	13	11	13	13
Molten dripping (Yes/No)	No	No	No	No	No	No	No	No	No	No
Smoke developments (visual impression)	Slight					Slight				

Note: NA = Not applicable

IV. DIN 4102-1:1998 Criteria for classification

1) All materials, except flooring, may be classed as **B1** materials if they meet the following requirements a) and b):

a) The test using the 'Brandschacht' apparatus described in DIN 4102-15 (cf. subclause 6.1.3.1) shall be deemed passed if

- The mean value for the residual length (portion of specimen that has not burned or charred; cf. subclause 9.1 of DIN 4102-16) of each specimen is at least 15 cm and no individual values are lower than 0 cm,
- The mean effluent temperature does not exceed 200 °C in any test,
- The requirement for the residual length of each specimen is met even where there is afterflame, afterglow, or smouldering.

b) Pass DIN 4102-1:1998 sub-clause 6.2.5 Ignitability Test if

For each specimen, flaming doesn't reach the gage mark within 20s after flame application.

2) Materials may be classed as **B2** materials if they pass the ignitability test specified in DIN 4102-1:1998 subclause 6.2.5.

For each specimen, flaming doesn't reach the gage mark (150mm marks) within 20s after flame application.

3) Combustible materials which cannot be classed as B1 or B2 materials shall be classed as **B3** materials.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing/inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Qaccheck@sgs.com
 No. 301, Sunlight Road, 2 Block, Sunlight Industry Zone, Anji County, Zhejiang Province, China 313300 t (86-572) 5018825 f (86-572) 5018829 www.sgs.com.cn
 中国·浙江·安吉县阳光工业园二区阳光大道301号 邮编: 313300 t (86-572) 5018825 f (86-572) 5018829 sgs.china@sgs.com

Test Report

Report No.: AJFS2404004050FF

Date: MAY 08, 2024

Page 6 of 6


STATEMENTS:

This declaration of conformity is only based on the result of this laboratory activity, the impact of the uncertainty of the results was not included.

This test report does not replace any mandatory certification of the product that may be required.

The test results relate to the behaviour of the test specimens of a product under the particular conditions of the test; they are not intended to be the sole criterion for assessing the potential fire and smoke hazard of the product in use.

Photo Appendix:

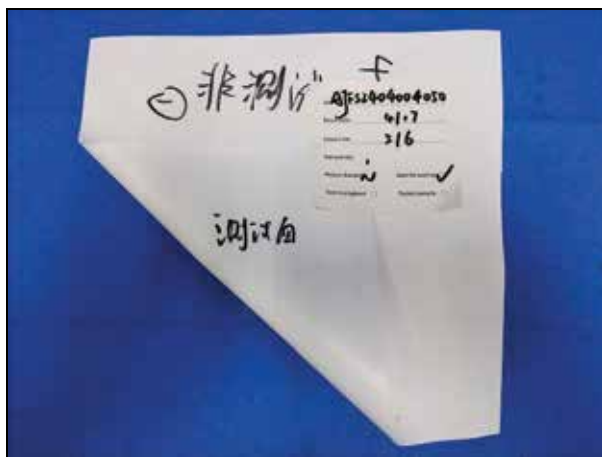

SGS authenticate the photo on original report only

*** End of Report ***



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing/inspection report & certificate, please contact us at telephone: (86-755) 8307 1442, or email: CN.Qaccheck@sgs.com
No. 301, Sunlight Road, 2 Block, Sunlight Industry Zone, Anji County, Zhejiang Province, China 313300 t (86-572) 5018825 f (86-572) 5018829 www.sgs.com.cn
中国·浙江·安吉县阳光工业园二区阳光大道301号 邮编: 313300 t (86-572) 5018825 f (86-572) 5018829 sgs.china@sgs.com