



FEEL THE SW  
DIFFERENCE.®

# DESIGNED TO ENHANCE WORKER PERFORMANCE.



**PowerForm®**

**PF-95BL**

POWDER-FREE ECOTEK SUSTAINABLE  
NITRILE EXAMINATION GLOVES WITH DRY CORE\*


**KEEP HANDS COOLER AND MORE COMFORTABLE  
WITH PREMIUM EXAM QUALITY NITRILE GLOVES,  
FEATURING UNIQUE DRY CORE MOISTURE  
MANAGEMENT TECHNOLOGY.**

- Dry Core® Moisture Management Technology pulls sweat away from the skin
- EcoTek® Sustainable Technology\*
- Silicone-free for critical environments

ANSI Level 3  
Abrasion  
Protection

Fully textured  
surface for wet  
and dry grip

Tear-resistant  
beaded cuff for  
easy donning

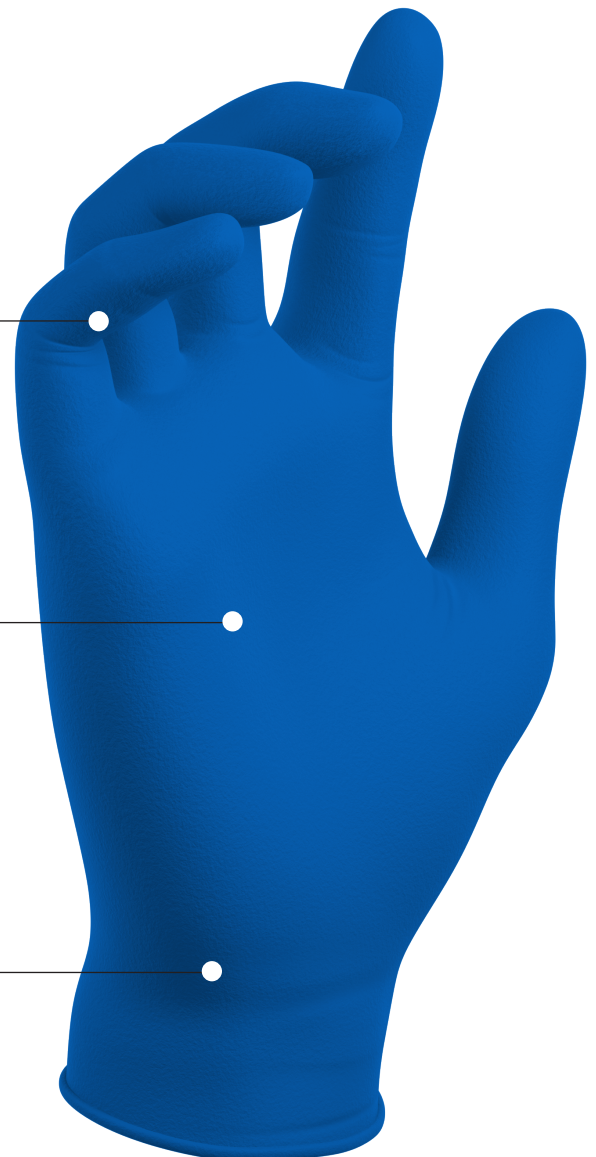

PF

PF-95BL

WEIGHT



(large size)

LENGTH



THICKNESS



FEATURES

Dry Core®  
EcoTek®

COLOR

BLUE

ECOTEK



Feel the  
difference.™

SW®

33278 Central Avenue, Unit 102, Union City, CA 94587, USA  
Tel: +1.510.429.8692 | Fax: +1.510.487.5347

Trademarks and registered trademarks are the property of SW and its affiliates.  
©2024 SW. All rights reserved.



WOMEN  
OWNED



## TECHNICAL DATA



### PF-95BL

POWDER-FREE ECOTEK SUSTAINABLE  
NITRILE EXAMINATION GLOVES WITH DRY CORE\*

## PRODUCT DESCRIPTION

### SPECIFICATIONS

|                |        |                  |        |
|----------------|--------|------------------|--------|
| PRODUCT        |        | PowerForm®       |        |
| GRADE          |        | Powder-Free Exam |        |
| MATERIAL       |        | Nitrile          |        |
| THICKNESS      | FINGER | 6.9mil           | 0.18mm |
|                | PALM   | 6.1mil           | 0.16mm |
|                | CUFF   | 5.1mil           | 0.13mm |
| COLOR          | OUTER  | Blue             |        |
|                | INNER  | White            |        |
| SURFACE        | OUTER  | Fully Textured   |        |
|                | INNER  | Dry Core®        |        |
| LENGTH         |        | 9.5"             | 242mm  |
| WEIGHT         |        | 8.5g             |        |
| FIT TYPE       |        | Ambidextrous     |        |
| CUFF TYPE      |        | Beaded           |        |
| WATERTIGHT AQL |        | 1.5              |        |
| ORIGIN COUNTRY |        | China            |        |

\* Specifications based on size Large glove

### PHYSICAL PROPERTIES

|                   | PRE-AGING | POST-AGING |
|-------------------|-----------|------------|
| TENSILE STRENGTH: | 20 MPa    | 19 MPa     |
| ELONGATION:       | 560%      | 550%       |

### INTEGRATED TECHNOLOGIES

**DRY CORE** Moisture Management Technology:  
Absorbent lining wicks away moisture for added comfort in extended use.

**ECOTEK** Sustainable Technology: Product has been tested per ASTM D5526\*



## STANDARDS & CERTIFICATIONS

EN ISO 21420:2020  
EN 455-2000-2015  
ASTM D6319-19  
ASTM F1671-13  
ASTM F739-12  
Reach EU 1907/2006  
EU 2016/425

ANSI/ISEA 105-2016  
CAT III Complex Design  
FDA 21 CFR 177.2600



Please visit [swswglobal.com/symbols](http://swswglobal.com/symbols) for information on standards used on this document.

## ORDERING

| ITEM NO. | SIZE         | PALM WIDTH | PACKAGING                           |
|----------|--------------|------------|-------------------------------------|
| N106551  | XS 5½ – 6    | 3.0" 76mm  | 50 gloves per box 10 boxes per case |
| N106552  | S 6½ – 7     | 3.4" 87mm  | 50 gloves per box 10 boxes per case |
| N106553  | M 7½ – 8     | 3.8" 97mm  | 50 gloves per box 10 boxes per case |
| N106554  | L 8½ – 9     | 4.3" 109mm | 50 gloves per box 10 boxes per case |
| N106555  | XL 9½ – 10   | 4.5" 114mm | 50 gloves per box 10 boxes per case |
| N106556  | 2XL 10½ – 11 | 4.9" 125mm | 50 gloves per box 10 boxes per case |

## APPLICATIONS

For Medical Use  
Chemical Handling  
Clinical  
Laboratory  
Liquid Handling  
Pharma Production

Keep out of sunlight. Store in a cool, dry place.  
Keep away from sources of ozone or ignition.



R\_N10655X0323



SW®  
33278 Central Avenue, Unit 102, Union City, CA 94587, USA  
Tel: +1.510.429.8692 | Fax: +1.510.487.5347  
Trademarks and registered trademarks are the property of SW and its affiliates.  
©2024 SW. All rights reserved.



\*EcoTek gloves tested to ASTM D5526-12 Standard Test Method for Determining Anaerobic Biodegradation of Plastic Materials Under Accelerated Landfill Conditions. Results are 92.6% biodegradation in 60% solids landfill at 945 days. Future results cannot be predicted/extrapolated. If you need more information on the test reports, send email to [cs@swswglobal.com](mailto:cs@swswglobal.com).