



Rimless

4 Star Efficiency

Hyde

STYLE

Rimless Wall Faced Pan

CODE

HYD002

COLOUR



Gloss White

INCLUSIONS

Connector, Soft Close Seat
N.B. S-Trap connector supplied
as standard

NOTES


- Powerful yet efficient Rimless Flush
- CleanMax Anti-Bacterial Glaze
- Set-Out (S-Trap) - 95 mm
- Set-Out (P-Trap) - 180 mm
- WELS 4-Star Rating

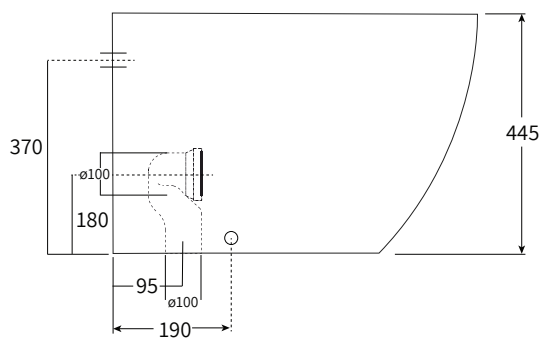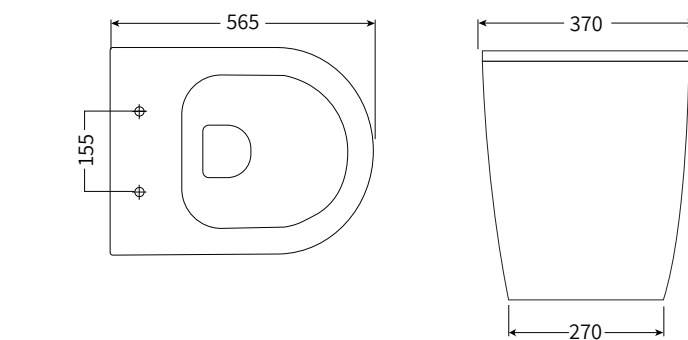

*140mm Set-Out achievable with Offset





Top Access

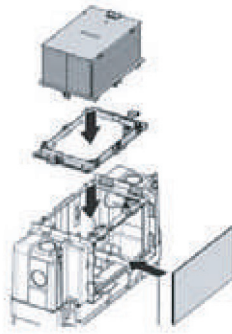

Minimum of 160 mm from rear of cistern to front edge of finished wall surface

Min. projection of 10mm - Max. projection of 80mm of tile flange box required prior to trimming to accommodate

Front Access

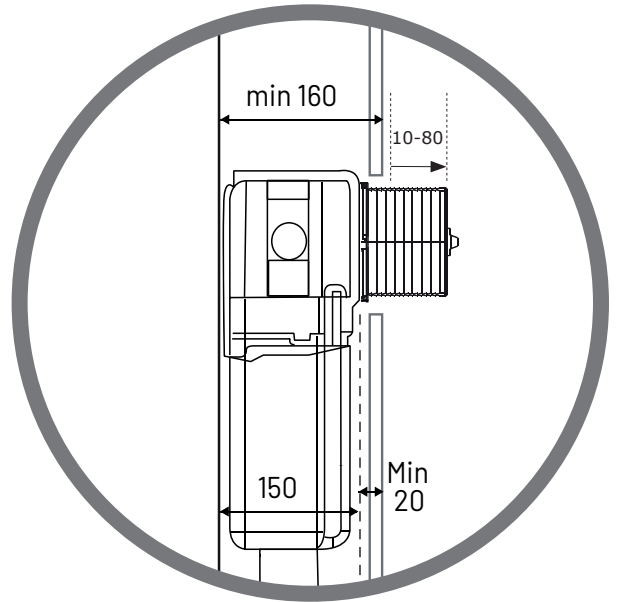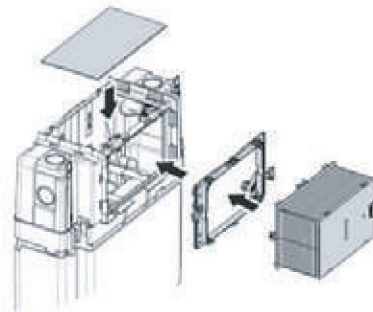

NOTE
See next page for compatible actuators

Expert Evo
LOW LEVEL/
UNDER BENCH CISTERN

CODE

721006/PN
(if used with pneumatic actuators)

721006/MC
(if used with mechanical actuators)

WEIGHT

4.5 kg

FEATURES

- Dual flush under bench cistern with 4.5/3 litre flush
- 150 mm thickness
- 4-Star WELS rating
- Top or front activation/access
- Supplied with anti-condensation lining
- Stop Cock included
- Brackets for in-wall fixing
- Dust/Tiling protection box
- Protection sponge provided for flush pipe
- 1/2" Flexible hose connection
- 10 Year Warranty
- Manufactured in Europe
- Pneumatic actuator kit included

Minimum thickness from front of cistern to the front face of wall to be at least 20mm

WELS RATING

