




| | | | | |
|---------------------------------------------|------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|-----------------------|
| DESCRIPTION: SNAPNRACK, TDS, OMNILUG | | DOC NUMBER: SNR-DC-01403 | | <div>SnapNrack®</div> |
| | | DRAWN BY: D.RYAN | | |
| PART NUMBER(S): 242-10034 | | REV: C | DATE: 4/3/2025 | |
| UNITS: IN, LB, DEG [MM, KG, DEG] | SHEET: 1:1 | <div>SNR SOLAR LLC 775 FIERO LANE, SUITE 200 SAN LUIS OBISPO, CA 93401 USA EMAIL: CONTACT@SNAPNRACK.COM</div> <div>THE INFORMATION IN THIS DRAWING IS CONFIDENTIAL AND PROPRIETARY. ANY REPRODUCTION, DISCLOSURE, OR USE THEREOF IS PROHIBITED WITHOUT THE WRITTEN CONSENT OF SUNRUN SOUTH LLC.</div> | | |

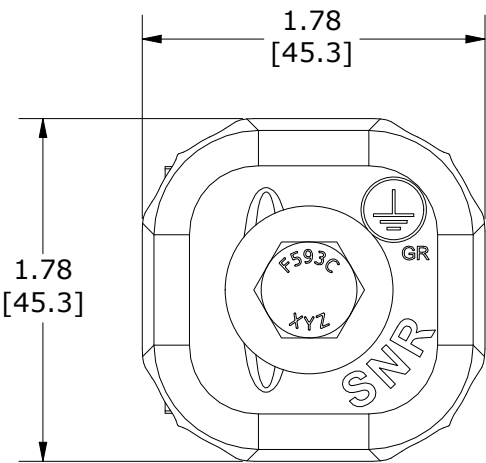


TOP VIEW

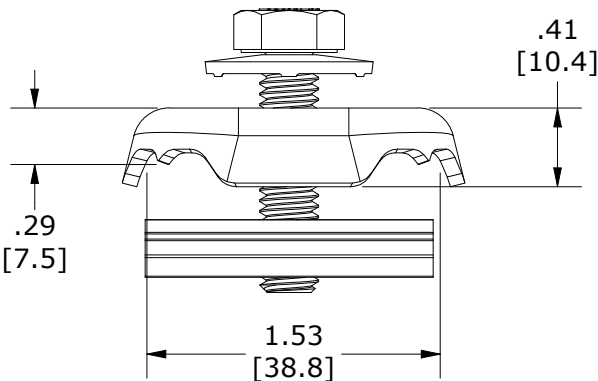

SIDE VIEW

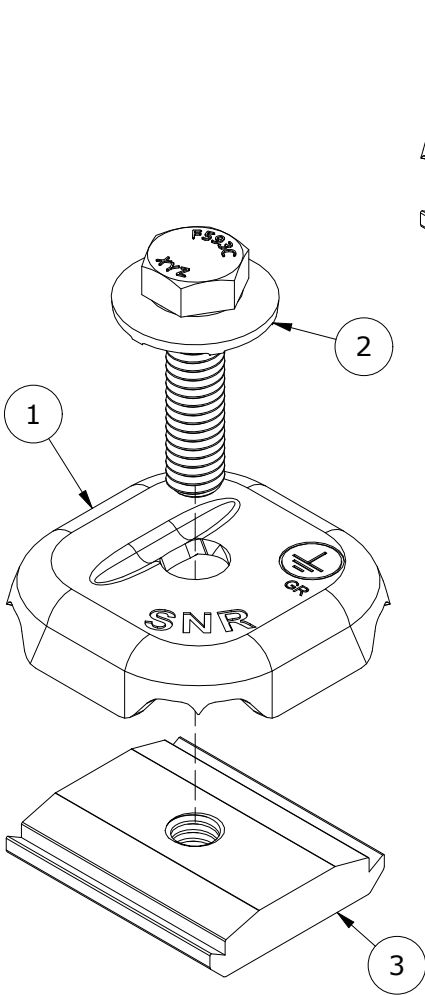

EXPLODED VIEW

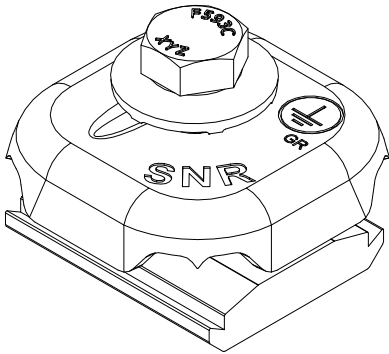

ASSEMBLED VIEW

| PARTS LIST | | |
|------------|-----|---------------------------------------------------------------------|
| ITEM | QTY | DESCRIPTION |
| 1 | 1 | SNAPNRACK, OMNILUG, BONDING BRACKET, SS |
| 2 | 1 | SEMS SCREW, HEX, 5-16IN-18 X 1-1-4IN, 7-8 OD CONICAL WSH, TOOTH, SS |
| 3 | 1 | SNAPNRACK CHANNEL NUT 5-16IN-18 |

| | | |
|-----------------------|--------------------------------|-------------------------------------|
| MATERIALS: | 300 SERIES STAINLESS, 6005 AL | OPTIONS: |
| DESIGN LOAD (LBS): | N/A | SOLID WIRE GAUGE RANGE: 6-12 AWG |
| ULTIMATE LOAD (LBS): | N/A | STRANDED WIRE GAUGE RANGE: 8-10 AWG |
| TORQUE SPECIFICATION: | 130 IN-LB | |
| CERTIFICATION: | UL 467 COMPLIANT, UL 2703 LST. | |
| WEIGHT (LBS): | 0.17 | |