



Whole of Home

ESP PLUS

Energy Smart Performance.



That's better. That's Actron.



ActronAir

ActronAir. Because Australia needs Australian Air Conditioning

ESP PLUS

The year 1984 saw Advanced Australia Fair become our National Anthem, the 1 dollar coin come into circulation and a small family air conditioning business open its doors. Today, ActronAir is a proud Australian company recognised for making world-class air conditioners. Well, it stands to reason. The team at ActronAir experience our harsh Australian conditions first hand, and our climate places demands on air conditioning not found in other parts of the world.

And that's why ActronAir's engineers have developed the most advanced air conditioning systems specifically for the unique and harsh Australian environment.

Made with a superior operating range of -10°C to 50°C, and coming packed with a host of innovative features, ActronAir's ESP Plus ducted system is engineered to withstand the hottest and coldest conditions Australia can throw at it. Where other air conditioners struggle and shut down, the ESP Plus will be there for you when you need it most.




**More than
a quarter of a
million Aussies
take comfort in
ActronAir**

Superb comfort and energy savings through digital technology

ESP stands for Energy Smart Performance and it's how our ESP Plus ducted system keeps you superbly comfortable all year round without wasting energy. Our ESP Plus delivers comfort with such precision you'll forget you even have air conditioning, and because of that precise control you'll also save some serious cash when the electricity bill arrives.



A superior operating range made for Australia

Most overseas air conditioners are only designed with a maximum temperature range of 43°C to 46°C. The made-in-Australia for Australia ESP Plus operates up to 50°C. Big deal? Yes.

The temperature around the outdoor unit can reach far higher than what they're saying on the weather report due to direct sun or heat radiating off the ground. They're often located against a wall or fence where there's low air circulation.

ESP Plus not only operates at higher temperatures, it also performs at a higher capacity leading up to that peak temperature.



“ Nothing beats performing under extremes. Engineered for Australia, you can trust ActronAir to be there when you need it most. ”

Mark 'Frosty' Winterbottom
2015 V8 Supercars Champion

Smarter outside



Vertical discharge

The ESP Plus' clever outdoor unit features a vertical, rather than horizontal, discharge of air. Unlike foreign brands, we're well aware that the side of the Australian home is not only a handy space for an outdoor unit, but is also often tight. And we know that if you don't let hot air escape it will surround the unit, reducing its performance and in turn lead to higher energy consumption. That's why we've engineered the ESP Plus to release hot air upwards, rather than pushing air straight into the neighbour's fence.

Aussie tough



Louvered grille

The powder coated louvered grille guard allows for better airflow and protection in Australia's extreme weather conditions. It's mighty tough – engineered to withstand over 1,000 hours of salt spray exposure under stringent Australian testing standards.

Here for the long haul



Coated coil protection

ActronAir uses blue fin epoxy coated protection on the indoor and outdoor coils of ESP Plus. It reduces corrosion from the harsh Australian conditions, as well as assisting the defrosting process, thus improving heating efficiency.



Unheard of technology



Quieter operation

Clever design, technology and choice of materials led to SRS, ActronAir's Sound Reduction System, in the ESP Plus' outdoor unit.

Sound is reduced inside as well thanks to ESP Plus' highly efficient EC inverter fan technology, which provides incremental airflow adjustments when zones are turned off. That way you won't be struggling to make yourself heard over the air conditioning.

Turn on, bliss out



A smarter start-up

In winter, some air conditioners when turned on blast out unheated air until the indoor heating coil catches up. ActronAir engineers developed a better way. ESP Plus has a smart preheat delay function so that the coil heats up before the fan comes on. That's better - simple and smart.

Blackout proof



Auto-restart

Blackout? No problem. Our ESP Plus restarts automatically in its last programmed setting once the power is restored, which means you don't have to take the time to reprogram your system.

Better Energy Efficiency

What's zoning and why do I need it?



When you're fast asleep tucked up in bed, you simply don't need the rest of your house air conditioned. That's where Energy Smart Zoning comes in. Your home can be split into different zones and air conditioned accordingly, right down to a single room.



Light's out - Energy Smart Zoning delivers better energy savings

When you leave a room you turn off the light to save electricity, right? With ESP Plus' Energy Smart Zoning you do exactly the same thing with your zones, only there's added benefits.

Aussie homes usually have large living areas that are split into zones when air conditioning is installed. Individual rooms are zones as well. The problem with conventional inverter systems is that even when you shut off a zone, they still deliver more air than is required. So for the zones still on, you get an 'air dump' effect that's noisy, inefficient and a real curtain blower.

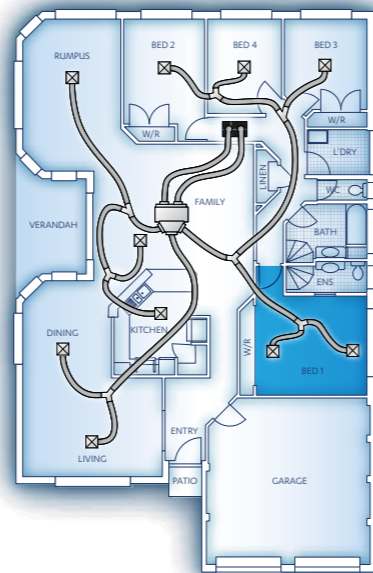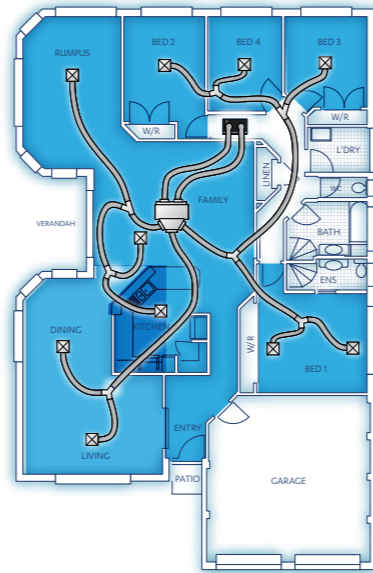


No more billowing curtains

ESP Plus has Variable Fan Technology that delivers just the right amount of conditioned air to the zones you want – right down to 20% of its total airflow volume. So on that hot summer evening you get a better, quieter night's sleep, without the billowing curtains, and wasted energy.



Energy Modelling

Typical 14kW Unit - Cooling Only

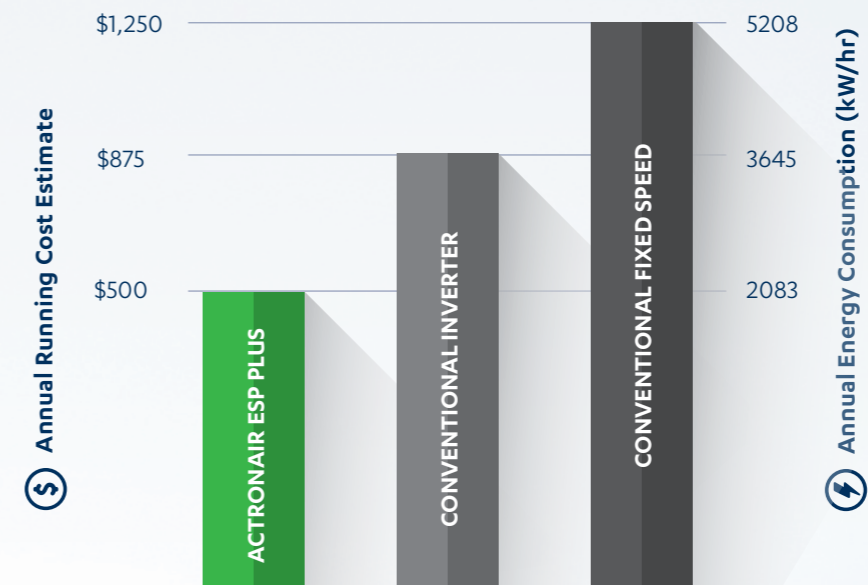

Based on electricity price of 24c per kW/H and the cooling energy consumption, this translates to a saving of up to \$700* per annum compared to conventional fixed speed systems.

A more comfortable electricity bill

The energy saving features in an ESP Plus system can make a huge difference to the cost of living. Over 5 years you could **save up to \$3,500** on your electricity costs for cooling alone. When heating is taken into consideration that could be even more. In fact, ESP Plus digital technology is **up to 60% more efficient** than conventional fixed speed air conditioners, and **up to 40% more efficient** than a conventional inverter system.

Why pay extra for air when you could be putting it towards your next holiday?




Better Technology

Why a digital compressor?

A digital system has a lot of advantages over a conventional inverter system.

ActronAir's ESP Plus digital compressor can operate right down to 10% of its total capacity, whereas even the best performing conventional inverters can only get down to 40%. That's a big deal because it means you only use the amount of energy you need.


When combined with the EC inverter fan's ability to provide variable airflow capacity, ESP Plus also creates a more comfortable environment. When the baby's asleep, you don't want more air pouring into the room just because the air conditioner can't operate at low levels.

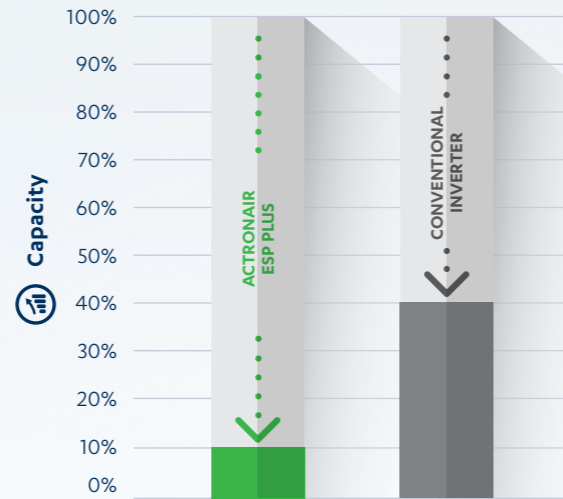

Stopping the stop-start, stop-start

Generally conventional inverters don't work below 40% of capacity, they simply turn on, then off, then on again as they struggle to keep a set temperature.

Our ESP Plus Digital system is a lot more precise. Working right down to 10% of capacity, it not only gets to your perfect temperature faster, it operates more smoothly, and can maintain the temperature to within $\pm 0.3^{\circ}\text{C}$ at the sensor location.

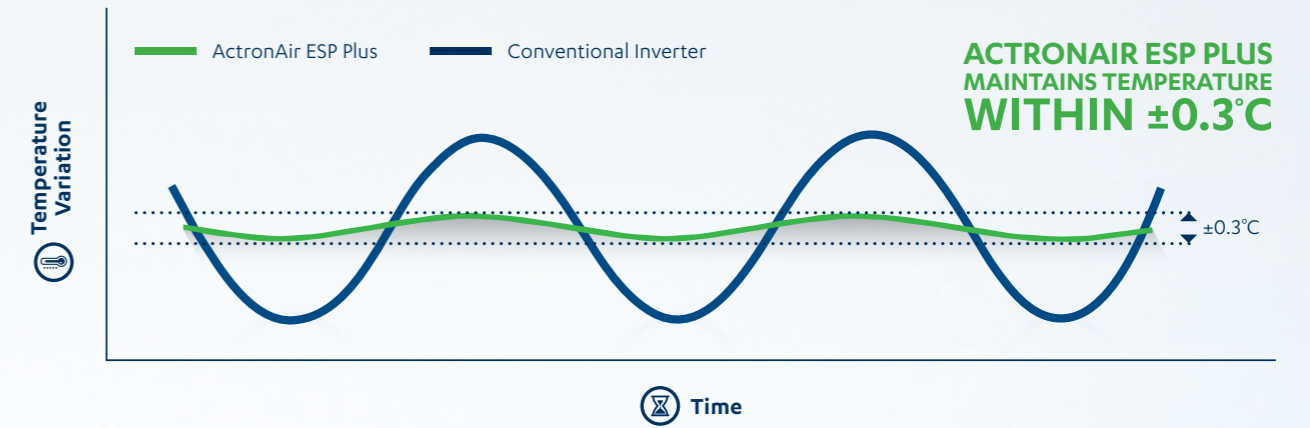

From zero to comfort – quickly

Our digital compressor also gets up to speed much faster. It's perfect for when you arrive home on a sizzling summer's day, or freezing winter's night, and need to get comfy fast.

A conventional inverter uses 'step, rest and stop' cycles, so the temperature 'jumps' up and down with each step. That's a power drainer. Not only that, it can take between 5 and 10 minutes to get up to full capacity before it gets to work cooling or heating your space, whereas an ESP Plus system can get up to maximum capacity almost immediately.

It does all of this happily too. Our testing shows that digital compressors seem to wear in, not out, meaning you'll have a system that keeps working hard, long into the future.



That's cool, but ActronAir uses inverters too. Ours are just better.

We call our inverter the Tru-Inverter, using it in our ESP Platinum series of ducted air conditioners. An advanced approach to traditional inverter technology allows the Tru-Inverter to reach preset temperatures with precision, speed and smoothness.

Compared to conventional inverter systems, both our ESP Plus Digital system and ESP Platinum Tru-Inverter system deliver superior levels of comfort at home, with significant long-term energy savings. Each system has its pluses, it's just that when it comes to inverters we prefer to use the best in the business. Put simply, if you're looking for the best energy efficient air conditioner for your home, you only need to look for the ActronAir badge.

So if you're interested in an inverter, check out our ESP Platinum series of ducted air conditioners.



Tru-Inverter

Better Control

4 or 8 zones under your control

ActronAir builds its own controls in Australia to ensure they integrate well with your ESP Plus and operate together seamlessly. An 8-zone touch pad is conveniently integrated into our master controller, avoiding the need for a second device on your wall to control zones. Importantly, the slimline controller is logical and user-friendly, with controls in easy to read 'plain English'. And with a 7 day 24 hour programmable timer, it's completely 'set and forget'.

And for precise comfort control, our system allows you to set the temperature in 0.5°C degree increments.

ESP Plus does provide an optional secondary controller with mimic logic. It's ideal for those who live in large or double storey houses. Rather than having to trounce up and down every time you want to change the settings, ESP Plus allows you to setup a controller on each floor for absolute convenience.

Set your comfort remotely

The optional ActronConnect allows you to control your ESP Plus ducted system wirelessly via smartphone or computer. Cool your house down on your way home, warm up the baby's room or check you've turned off the air conditioning. It's all in the palm of your hand.



Master Controller



Optional ActronConnect

Master Controller – Features and benefits

Features	Benefits
Easy to use 8-zone integrated touch pad	Eliminates the need to install a second device on your wall to control zones
On board temperature sensor	Eliminates the need to install a second device on your wall to sense temperature
7 day programmable time clocks	'Set and forget' weekly scheduler allows you to set your air conditioner to turn on and off to suit your lifestyle
24 hour programmable timer	Quick and convenient way to turn your system on before you wake up or off after you've gone to sleep
Smart defrost function	Improves heating performance in extremely cold weather
Preheat delay function	Eliminates cold drafts in Winter
Compatible with home automation for remote on/off control	Allows you to control your air conditioner as part of your home automation system
Optional secondary temperature sensor	Allows for better comfort and temperature control
ESP function	Learns your zoning and adjusts airflow automatically when zones are turned off

Better Engineered

Inside and out - innovation designed for more comfortable living

We understand that for most people their air con's outdoor unit is a box best forgotten. But with ActronAir it's here that a lot of our technological innovations, design improvements and quality material choices add up to better comfort, better energy savings and a family air conditioner you can trust to last season after season, year after year.

High efficiency performance fans and heat exchangers, seamless system controls – the list goes on and on, just like an ActronAir.

Better Service

Local service you can count on

ESP Plus is designed and manufactured in Australia, so you'll never have to call far or wait long for service and support. Our National Service Network has service staff on the ground and parts on the shelves. They're friendly, reliable and prompt. Furthermore, ActronAir's 5 year warranty will keep you comfortable with absolute peace of mind.



The Ultimate in Home Comfort Control

Different temperatures in different rooms at the same time

With ESP Plus' optional Ultima upgrade, you can set different temperatures in different zones, all at the same time. In fact, you can have up to 8 different zones in your home all individually comfort-controlled to suit everyone's precise needs.

Controlling comfort and energy

As a result of the sun's position in the sky, different areas of the home have different temperature loads at different times of the day. However, with sensors in each zone, the Ultima functionality ensures the set temperature is maintained across the home and rooms are not over conditioned, further minimising energy usage.



Master Controller

This stylish slimline controller is your home's comfort-control centre. With an easy to use touch pad, you can set the temperature, fan speeds and timers as it communicates with sensors in each zone of your home.



Individual Zone Controller

Want things a touch warmer or cooler without leaving the zone? No problem. With individual zone controls you can simply adjust the temperature right then and there, or if you prefer, turn it off completely.



Zone Sensor

Zone sensors can be used in areas where you want the Master Controller to control the temperature of that zone as an alternative to an individual Zone Controller. It's ideal for kids' bedrooms and playrooms where you'd rather not let the little fingers do the controlling.



Technical Specifications

ESP Plus Split Ducted Variable Capacity (Single/Three Phase)

Technical Information							
		Single Phase			Three Phase		
OUTDOOR MODEL		SRD131C	SRD151C	SRD191C	SRD173C	SRD203C	SRD233C
INDOOR MODEL		SRV131E	SRV151E	SRV191E	SRV171E	SRV201E	SRV231E
¹ Total (Gross) Capacity (kW) (AS/NZS3823.1.2)	Cooling (Rated)	12.75	14.67	19.33	17.45	20.10	23.59
	Heating (Rated)	11.71	14.64	17.90	17.39	19.38	22.97
Nett (Rated) Capacity (kW) (AS/NZS3823.1.2)	Cooling (min - max)	12.27 (1.23-12.27)	14.37 (1.44-14.37)	18.64 (1.86-18.64)	16.88 (1.69-16.88)	19.32 (1.93-19.32)	23.00 (2.30-23.00)
	Heating (min - max)	12.16 (2.31-12.16)	15.00 (2.85-15.00)	18.52 (3.52-18.52)	17.93 (3.41-17.93)	20.09 (3.82-20.09)	23.50 (4.47-23.50)
Input Power (kW) (AS/NZS3823.1.2)	Cooling	3.68	4.29	5.73	5.02	5.78	6.76
	Heating	3.30	4.49	5.33	4.81	5.24	6.91
² EER Rated (AS/NZS3823.1.2)	Cooling	3.33	3.35	3.25	3.36	3.34	3.40
³ COP Rated (AS/NZS3823.1.2)	Heating	3.68	3.34	3.47	3.73	3.83	3.40
Power Supply (V / Ph / Hz)	Outdoor	230V / 1Ph + N / 50Hz			400V / 3Ph + N / 50Hz		
	Indoor	230V / 1Ph + N / 50Hz					
Rated Load Amps (AS/NZS3823.1.2)	Outdoor / Indoor / Total	13.5 / 3.6 / 17.1	17.5 / 2.3 / 19.8	20.8 / 5.1 / 25.9	8.7 / 4.1 / 12.8 ^{ww}	9.2 / 5.4 / 14.6	14.0 / 4.0 / 18.0
	Full Load Amps (AS/NZS3823.1.2)	23.6 / 4.3 / 27.9	27.1 / 4.3 / 31.4	32.5 / 5.4 / 37.9	12.3 / 4.3 / 16.6	13.5 / 5.9 / 19.4	16.2 / 4.9 / 21.1
⁴ Circuit Breaker Amps		32.0	32.0	40.0	20.0	20.0	25.0
IP Rating	Outdoor	IP44					
	Indoor	IP20					
Compressor	Type / No. per Unit	Digital Scroll / 1					
	Starting Method	Soft Starter			D.O.L.		
No. of refrigeration Circuits/No of capacity stages (Capacity range)		1/ Variable (10-100% capacity)					
Refrigerant		R410a					
Fans (Type x Number per unit)	Outdoor	Axial / 6 Pole External Rotor / Direct Drive x 2					
	Indoor	Twin Deck Centrifugal / ECM Direct Drive x 1					
Airflow Range Indoor (l/s)	Maximum	780	880	1180	900	1200	1440
	Nominal	650	770	980	850	1000	1200
	Minimum	130	155	195	170	200	240
External Static Pressure (Pa) at:	Maximum Airflow	120	120	128	116	120	80
	Nominal Airflow	225	218	192	164	188	170
Outdoor Dimensions (mm)	Depth	580	580	580	580	580	685
	Height	990	990	1045	1045	1045	1105
	Width	1320	1320	1460	1460	1460	1685
Indoor Dimensions (mm)	Depth	615	615	680	615	680	695
	Height	412	412	435	412	435	485
	Width	1090	1290	1420	1290	1420	1470
⁵ Nominal Weight (kgs)	Outdoor	135	136	190	176	185	220
	Indoor	58	61	76	62	76	90
Field Pipe Size	Liquid Pipe - mm (inch)	9.52 (3/8)	9.52 (3/8)	9.52 (3/8)	9.52 (3/8)	⁸ 12.70 (1/2)	12.70 (1/2)
	Gas Pipe - mm (inch)	19.05 (3/4)	19.05 (3/4)	19.05 (3/4)	19.05 (3/4)	⁸ 22.22 (7/8)	25.40 (1)
⁶ Sound Pressure Level (dBA)	Outdoor (low/high fan)	47 / 50	50 / 52	52 / 54	52 / 54	52 / 54	54 / 59
⁷ Sound Power Level (dBA)	Outdoor (low/high fan)	64 / 67	67 / 69	69 / 71	69 / 71	69 / 71	70 / 75
MEPS Compliant		Yes	Yes	Yes	Yes	Yes	Yes

Control Features							
LM7-D Wall Controller (8 Zone)	Included	Included	Included	Included	Included	Included	Included
LM24W Wall Controller (8 Zone) - Secondary Master Controller	Optional	Optional	Optional	Optional	Optional	Optional	Optional
Remote Temperature Sensor	Optional	Optional	Optional	Optional	Optional	Optional	Optional
Blue Epoxy Coat Coil Fin Protection - Indoor & Outdoor Coils	Standard	Standard	Standard	Standard	Standard	Standard	Standard
Home Automation / Remote ON / OFF Capability	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Maximum Number of Zones	8	8	8	8	8	8	8
ActronConnect module for wireless control	Optional	Optional	Optional	Optional	Optional	Optional	Optional

Foot Notes 1-8

- Based on unit rating excluding indoor fan kW.
- EER Rated = Energy Efficiency Ratio (Rated Capacity Cooling / Rated Input Cooling).
- COP Rated = Coefficient of Performance (Rated Capacity Heating / Rated Input Heating).
- Refer to AS/NZS 3000 "Australian/New Zealand Wiring Rules" for more details.
- Refer to Catalogue Unit Weight Distribution Guide section for details of weight points.
- Sound Pressure Level at 3m distance is determined as the measured sound pressure at 3m perpendicular to the coil side of the condenser.
- Determination of Sound Power Levels of Noise Sources, AS12172 - Precision Methods for Broad-Band Sources in Reverberation Rooms.

- For short pipe run of 0-20m or average 1-storey residential dwellings, 19.05mm (3/4") Gas Field Pipe and 9.52mm (3/8") Liquid Line may be used in place of the recommended 22.22mm (7/8") gas pipe and 12.7 (1/2") liquid line. Please refer to Capacity Selection Data & see Pipe Length Correction Multiplier for the drop in refrigeration capacity as a consequence of change in Gas Field Pipe diameter. Swaged end of Indoor and Outdoor Units' gas pipe to be cut in the field to fit ID into 19.05mm (3/4") replacement Field Pipe. Swaged end to be cut-off in the field to fit into field pipe.

Important Notes:

- The Local Electricity Supply Authority may require limits on - starting current, running current and voltage drop, please check prior to purchase.
- When the outdoor temperature exceeds the rated conditions, the cooling/heating capacities may decrease the rated nett values.
- Specifications subject to change without notice.



ESP Ultima Split Ducted Variable Capacity (Single/Three Phase)

Technical Information							
		Single Phase			Three Phase		
OUTDOOR MODEL		SRDIS1C	SRD191C	SRD173C	SRD203C	SRD233C	
INDOOR MODEL		SRM151E	SRM191E	SRM171E	SRM201E	SRM231E	
¹ Total (Gross) Capacity (kW) (AS/NZS3823.1.2)	Cooling (Rated)	14.67	19.33	17.45	20.10	23.59	
	Heating (Rated)	14.64	17.90	17.39	19.38	22.97	
Nett (Rated) Capacity (kW) (AS/NZS3823.1.2)	Cooling (min - max)	14.37 (1.44-14.37)	18.64 (1.86-18.64)	16.88 (1.69-16.88)	19.32 (1.93-19.32)	23.00 (2.30-23.00)	
	Heating (min - max)	15.00 (2.85-15.00)	18.52 (3.52-18.52)	17.93 (3.41-17.93)	20.09 (3.82-20.09)	23.50 (4.47-23.50)	
Input Power (kW) (AS/NZS3823.1.2)	Cooling	4.29	5.73	5.02	5.78	6.76	
	Heating	4.49	5.33	4.81	5.24	6.91	
² EER Rated (AS/NZS3823.1.2)	Cooling	3.35	3.25	3.36	3.34	3.40	
³ COP Rated (AS/NZS3823.1.2)	Heating	3.34	3.47	3.73	3.83	3.40	
Power Supply (V / Ph / Hz)	Outdoor	230V / 1Ph + N / 50Hz			400V / 3Ph + N / 50Hz		
	Indoor	230V / 1Ph + N / 50Hz					
Rated Load Amps (AS/NZS3823.1.2)	Outdoor / Indoor / Total	17.5 / 2.3 / 19.8	20.8 / 5.1 / 25.9	8.7 / 4.1 / 12.8	9.2 / 5.4 / 14.6	14.0 / 4.0 / 18.0	
	Full Load Amps (AS/NZS3823.1.2)	27.1 / 4.3 / 31.4	32.5 / 5.4 / 37.9	12.3 / 4.3 / 16.6	13.5 / 5.9 / 19.4	16.2 / 4.9 / 21.1	
⁴ Circuit Breaker Amps		32.0	40.0	20.0	20.0	25.0	
IP Rating	Outdoor	IP44					
	Indoor	IP20					
Compressor	Type / No. per Unit	Digital Scroll / 1					
	Starting Method	Soft Starter			D.O.L.		
No. Refrigeration Circuits/No. Capacity Stages (Capacity range)		1/Variable (10-100% capacity)					
Refrigerant		R410a					
Fans (Type x Number per unit)	Outdoor	Axial / 6 Pole External Rotor / Direct Drive x 2					
	Indoor	Twin Deck Centrifugal / ECM Direct Drive x 1					
Airflow Range Indoor (l/s)	Maximum	880	1180	900	1200	1440	
	Nominal	770	980	850	1000	1200	
	Minimum	155	195	170	200	240	
External Static Pressure (Pa) at:	Maximum Airflow	120	128	116	120	80	
	Nominal Airflow	218	192	164	188	170	
Outdoor Dimensions (mm)	Depth	580	580	580	580	685	
	Height	990	1045	1045	1045	1105	
	Width	1320	1460	1460	1460	1685	
Indoor Dimensions (mm)	Depth	615	680	615	680	695	
	Height	412	435	412	435	485	
	Width	1290	1420	1290	1420	1470	
⁵ Nominal Weight (kgs)	Outdoor	136	190	176	185	220	
	Indoor	61	76	62	76	90	
Field Pipe Size	Liquid Pipe - mm (inch)	9.52 (3/8)	9.52 (3/8)	9.52 (3/8)	⁸ 12.70 (1/2)	12.70 (1/2)	
	Gas Pipe - mm (inch)	19.05 (3/4)	19.05 (3/4)	19.05 (3/4)	⁸ 22.22 (7/8)	25.40 (1)	
⁶ Sound Pressure Level (dBA)	Outdoor (low/high fan)	50 / 52	52 / 54	52 / 54	52 / 54	54 / 59	
⁷ Sound Power Level (dBA)	Outdoor (low/high fan)	67 / 69	69 / 71	69 / 71	69 / 71	70 / 75	
MEPS Compliant		Yes	Yes	Yes	Yes	Yes	


Control Features					
LM7-D Wall Controller (8 Zone)	Included	Included	Included	Included	Included
LM24W Wall Controller (8 Zone) - Secondary Master Controller	Optional	Optional	Optional	Optional	Optional
LM-ZC Zone Controller	Optional	Optional	Optional	Optional	Optional
LM-ZS Zone Sensor	Optional	Optional	Optional	Optional	Optional
Blue Epoxy Coat Coil Fin Protection - Indoor & Outdoor Coils	Standard	Standard	Standard	Standard	Standard
Home/Building Automation Remote ON / OFF Capability	Yes	Yes	Yes	Yes	Yes
Maximum Number of Zones	8	8	8	8	8
ActronConnect Module for Wireless Control	Optional	Optional	Optional	Optional	Optional

Rated Conditions:

Cooling: 35°C DB Outdoor / Air Entering Indoor 27°C DB, 19°C WB
 Heating: 7°C DB, 6°C WB Outdoor / Air Entering Indoor 20°C DB

Warranty:

For full terms and conditions of ActronAir warranty, please refer to warranty terms document - www.actronair.com.au





ActronAir

That's better. That's Actron.

actronair.com.au

1300 522 722