


TBE



Properties

This conveyor belt model is formed by placing wire loops (eye-links) without gaps between them. The space between the eye-links is the same as the thickness of the wire. It can be preferred in cases where the amount of space in the conveyor belt is not needed (air & liquid flow rate) and the material carried is poured heavy and/or from a certain height.

Technical Properties

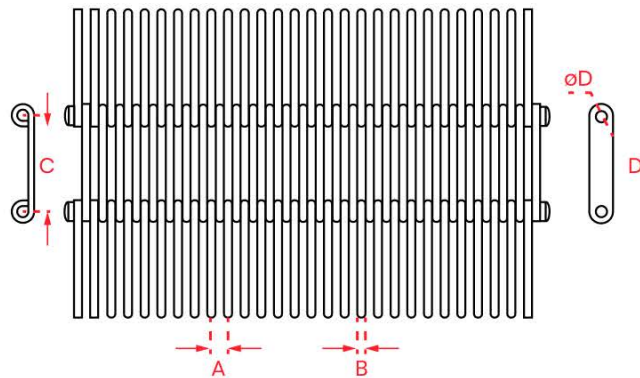

- A: Coil Pitch
- B: Wire Thickness
- C: Rod Pitch
- D: Plate Thickness
- øD: Rod Diameter

Dimensions

You can contact us for details and support.

Wire Thickness	Rod Thickness	Coil Pitch	Plate Thickness	Rod Diameter
1,5 2,0 2,5 3,0 3,5	1,5 2,0 2,5 3,0 3,5	30 50 50,8 75	3 4 5	4 5 7 8