

## **TBEP**




## **Properties**

Wire is welded between the eye-links to make it more stable and durable. Thanks to this welding, the distance between the eye-links can be increased. It is a lighter model. But it is not suitable for heavy loads and harsh conditions.

The number of rods to be tack welded onto eye-links can be one or two.

## **Technical Properties**

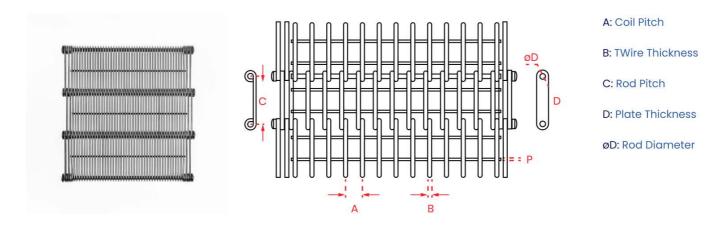

## **Dimensions**

You can contact us for details and support.

Wire Thickness	Rod Thickness	Coil Pitch	Plate Thickness	Rod Diameter
1,5 2,0 2,5 3,0 3,5	1,5 2,0 2,5 3,0 3,5	30 50 50,8 75	3 4 5	4 5 7 8

48 www.tbantsan.com