

ART. G572BU+D373AU

3/4" Thermostatic mixer with 3-way diverter

- Temperature control with safety override button at 100° F
- 3/4" NPT inlets, 1/2" outlets on rough
- Flow rate: 8.7 gpm @ 60 psi (primary outlet)
- Flow rate: 7.4 gpm @ 60 psi (secondary outlet)
- Flow rate: 7.4 gpm @ 60 psi (third outlet)
- Anti-scald mechanism
- Watertight casing for added safety
- Accessible shut-off valves and filters
- For horizontal installation

Date _____

Project/Comments: _____

Trim

- | | |
|--|--------------|
| ☐ Chrome | 87 02 G572BU |
| ☐ Matte Black | 87 13 G572BU |
| ☐ Matte White | 87 29 G572BU |
| ☐ Matte Gun Metal PVD | 87 P5 G572BU |
| ☐ Matte British Gold PVD | 87 P6 G572BU |
| ☐ Matte Copper PVD | 87 P9 G572BU |
| ☐ Deep Black PVD | 87 S1 G572BU |
| ☐ Pure Brass PVD | 87 Q7 G572BU |
| ☐ Raw Metal PVD | 87 Q8 G572BU |
|
 | |
| ☐ Brushed Stainless steel | 87 93 G572BU |

Rough



- | | |
|--------------------------|--------------|
| ☐ | 19 00 D373AU |
|--------------------------|--------------|

TOTAL PRICE

- | | |
|--|--------------|
| ☐ Chrome | 87 02 G572BU |
| ☐ Matte Black | 87 13 G572BU |
| ☐ Matte White | 87 29 G572BU |
| ☐ Matte Gun Metal PVD | 87 P5 G572BU |
| ☐ Matte British Gold PVD | 87 P6 G572BU |
| ☐ Matte Copper PVD | 87 P9 G572BU |
| ☐ Deep Black PVD | 87 S1 G572BU |
| ☐ Pure Brass PVD | 87 Q7 G572BU |
| ☐ Raw Metal PVD | 87 Q8 G572BU |
|
 | |
| ☐ Brushed Stainless steel | 87 93 G572BU |

ART. G572BU+D373AU

3/4" Thermostatic mixer with 3-way diverter

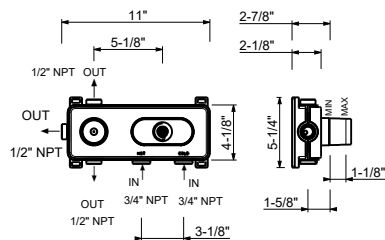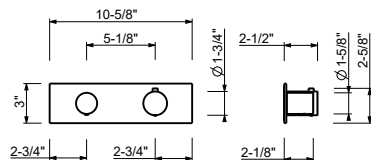

Way number 1

Pressure(PSI)	Waterflow (GPM/min)
7.25	2.34
14.5	3.31
29	4.64
43.5	5.71
58	6.6

Way number 2

Pressure(PSI)	Waterflow (GPM/min)
7.25	2.08
14.5	2.91
29	4.08
43.5	5.02
58	5.8

Way number 3

Pressure(PSI)	Waterflow (GPM/min)
7.25	2
14.5	2.85
29	4.07
43.5	4.98
58	5.78