

HINO 300 Series

Tipper Pro Range



*Image may contain items not standard to the model

KEY FEATURES

Factory Tipper bodies with drop sides
Twin barn door rear gates, body lock and rope rails
STD Cab, Wide & Crew Cab variants
Pre-Collision System (PCS) including AEB & PD
Vehicle Stability Control (VSC) including ABS & TC
Lane Departure Warning System (LDWS)
Daytime Running Lamps (DRL)
Dual SRS Airbags
Reverse Camera
ECE R-29 Cab Strength Certified
Cruise Control**
ADR 80/04 Emission level using Euro 6 Standard

KEY SPECIFICATIONS




GVM. 4,499 to 8,000 kg
GCM. 8,000kg
Power range 150hp
Torque range 440Nm
Transmissions. 6 speed Automatic
Wheelbases. 2.5m to 3.4m*
Internal body length 3.0m to 3.6m*

*See Model details for exact dimensions



MODEL DETAILS



Model Description	616 AT 2525 STD TIP PRO	616 AT 2810 WIDE TIP PRO
Product Code	XZU605R-WKTMVQ3 TP	XZU700R-WKTMVQ3 TP
TIPPER BODY		
Cubic Capacity	1.9m ³	2.1m ³
Internal length (mm)	3,000	3,100
Internal width (mm)	1,750	1,900
Drop sides & tailgate height (mm)		370
Deck plate thickness (mm)		3.2
Front plate thickness (mm)		3.2
Drop sides thickness (mm)		2.3
Tailgate thickness (mm)		3.2
Tipping angle (deg)		60°
Hydraulic cylinder bore & stroke (mm)		100 x 350
Hydraulic pump model	VC02-04	VC02-06
Control		Lever in the cab
Body Lock		Equipped
Rear Gate type		Barn door
Swinging gates to allow clear access to deck		Equipped
Tailgate operation with tipper control		Auto release from bottom
VEHICLE DETAILS		
Engine speed @ 100 Km/h	2,230rpm	2,165rpm
Max theoretical speed	135km/h	135km/h
Engine Power & Torque (hp & Nm)		150hp / 440Nm
Transmission type & number of forward gears		Automatic 6 speed
Fuel Tank Capacity	70 L	80 L
Wheels & Tyres	185/85R16	195/85R16
Seating capacity		3
DIMENSIONS – (mm)/WEIGHTS – (kg)		
Wheelbase (WB)	2,525	2,810
Overall length (OL)	4,760	3,140
Overall width (OW)	1,880	1,995
Cab width	1,695	1,995
Overall height (OH)	2,100	2,190
Front Overhang (FOH)	980	1,115
Road Clearance (RC)		170
Front Track (FT)	1,400	1,665
Rear Track (RT)	1,435	1,480
Turning circle	Kerb to Kerb	9,600
	Wall to Wall	10,800
Indicative chassis mass – kg (STD tools, 10 litres of fuel, spare tyre & subject to a +/- 3% tolerance)		
Total	2,835	3,140
Front	1,495	1,740
Rear	1,340	1,400
Standard Ratings	GVM	4,499kg
	GCM	7,999kg
Optional Ratings	GVM	5,500kg
	GCM	8,000kg

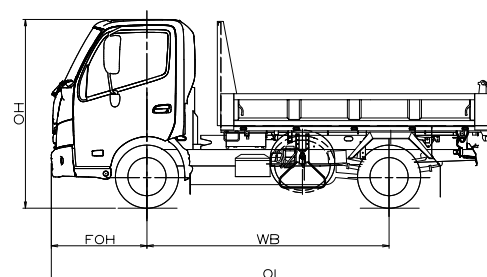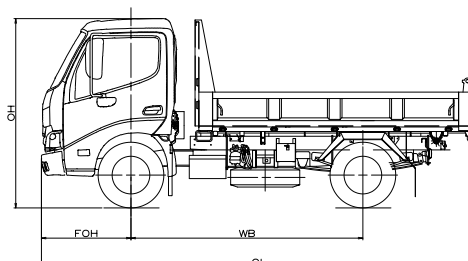

Drawings are for reference only to the dimensions table above.

MODEL DETAILS

Model Description	716 AT 3430 WIDE TIP PRO	816 AT 3430 WIDE TIP PRO
Product Code	XZU710R-WKTQVQ3 TP	XZU710R-WKTSVQ3 TP
TIPPER BODY		
Cubic Capacity	3.0m ³	
Internal length (mm)	3,600	
Internal width (mm)	2,000	
Drop sides & tailgate height (mm)	430	
Deck plate thickness (mm)	3.2	4.5
Front plate thickness (mm)	2.3	3.2
Drop sides thickness (mm)	2.3	3.2
Tailgate thickness (mm)	3.2	
Tipping angle (deg)	60°	55°
Hydraulic cylinder bore & stroke (mm)	100 x 480	
Hydraulic pump model	VC03-15	
Control	Lever in the cab	
Body Lock	Equipped	
Rear Gate type	Barn door	
Swinging gates to allow clear access to deck	Equipped	
Tailgate operation with tipper control	Auto release from bottom	
VEHICLE DETAILS		
Engine speed @ 100 Km/h	2,246rpm	2,458rpm
Max theoretical speed	134km/h	126km/h
Engine Power & Torque (hp & Nm)	150hp / 440Nm	
Transmission type & number of forward gears	Automatic 6 speed	
Fuel Tank Capacity	150 L	
Wheels & Tyres	215/85R16	225/80R17.5
Seating capacity	3	
DIMENSIONS – (mm)/WEIGHTS – (kg)		
Wheelbase (WB)	3,430	
Overall length (OL)	5,870	
Overall width (OW)	2,130	
Cab width	1,995	
Overall height (OH)	2,230	
Front Overhang (FOH)	1,115	
Road Clearance (RC)	185	200
Front Track (FT)	1,665	1,655
Rear Track (RT)	1,520	1,590
Turning circle	Kerb to Kerb	11,400
	Wall to Wall	12,800
Indicative chassis mass–kg (STD tools, 10 litres of fuel, spare tyre & subject to a +/- 3% tolerance)		
Total	3,595	3,745
Front	1,890	1,880
Rear	1,630	1,865
Standard Ratings	GVM	6,500kg
	GCM	8,000kg
Optional Ratings	GVM	4,499kg
	GCM	7,999kg

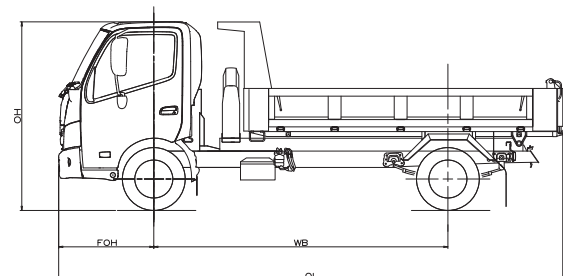

For specific layouts please refer to the applicable body mounting manual. (BMM)

Tipper Pro Range

SAFETY FEATURES

Active Safety Features		
Vehicle Stability Control	VSC	Equipped
Anti-lock Brake System	ABS	Equipped
Pre-Collision System	PCS	Equipped
PCS is inclusive of	Autonomous Emergency Braking	AEB
	Pedestrian Detection	PD
	Lane Departure Warning System	LDWS
Traction Control	TC	Equipped
Reverse Camera	RC	Equipped
ES Start (MT models only)	ES	Equipped
Daytime Running Lamps	DRL	Equipped
Reverse Buzzer		Equipped
Passive Safety Features		
ECE-R29 Cab Strength Certification		Equipped
SRS airbags for driver & side passenger		Equipped
SRS seatbelt pretensioner for driver & side passenger		Equipped
Shock absorbing & collapsible steering column		Equipped
Door Impact Beams		Equipped

TIPPER BODY FEATURES

All steel construction with underbody hoist
Auto release tail gate
Drop sides & tail gate
Body lock, rope rails & barn door

GENUINE ACCESSORY OPTIONS

Bullbar or Nudge bar
Chrome wheel covers
Additional Cameras (up to 5 extra)
Dash Camera (DVR Camera System)
Dash mat
Floor mats
GPS navigation with live traffic (Truck spec)
Retracting Tarp
Seat covers (Wool, Canvas, Carbon)
Stone guard
Sunvisor
Weathershields
UHF CB Radio Kit
Please check with your dealer for availability, price & fitment

For Cab Chassis related specifications not included in this document please refer to the applicable Cab Chassis spec sheet or Body mounting Manual

WARRANTY

New vehicle warranty period

Light Duty Model	Axle configuration	Standard warranty (whichever comes first)	Cab corrosion perforation
300 Series	4 x 2	5 years or 250,000km	60 months

Battery warranty – 12 months from date of delivery

* For conditions, refer to the Hino Parts & Service warranty brochure

Genuine parts or accessories warranty – 3 years unlimited kilometres when fitted by an authorised Hino dealer *



DISCLAIMER

Important notice – Hino Trucks are distributed in Australia by Hino Motor Sales Australia Pty Ltd A C N 064 989 724. All efforts have been made to ensure the information contained in this brochure was correct at time of printing or uploading. Hino Motor Sales Australia Pty Ltd reserves the right to alter any details of the specifications and equipment without notice. Hino in so far as it is permitted by law to do so, shall not be liable in any way as a result of any reliance placed by any person on anything contained in this brochure. You should therefore check with your authorised Hino dealer at the time of ordering your motor vehicle to ensure that colour, specifications, equipment, design features and options are available for the vehicle you are ordering. Please note that some options may only be available in combination with others. Authorised Hino dealers will on request provide up to date information on all accessories, design features, prices & availability. **Maximum Cruise control setting 106 km/h. *** GVM ratings of 4,499kg are conditional that the ADR definition of a "Goods Vehicle" can be met.