

HINO 300 Series

Alloy Tray Range



*Image may contain items not standard to the model

4 x 2 Cab Chassis

KEY FEATURES

- Aluminium Tray with drop sides
- STD & Wide cab variants
- Pre-Collision System (PCS) including AEB & PD
- Vehicle Stability Control (VSC)
- Lane Departure Warning System (LDWS)
- Daytime Running Lamps (DRL)
- Dual SRS Airbags
- Reverse Camera
- ECE R-29 Cab Strength Certified
- Cruise Control**
- ADR 80/04 Emission level using Euro 6 Standard

KEY SPECIFICATIONS

- GVM.** 4,499kg
. to 6,500kg
- GCM.** 8,000kg
- Power** 150hp/110kW
- Torque.** 440Nm
- Transmissions** 6 Speed Automatic
- Wheelbases** 2.525m, 3.375m, 3.430m
- Max Nominal Body Length** 3.0m, 4.5m



ENGINE

Model	Hino N04C-WN
Max. output (ISO Net) @ 2,700rpm	150hp/110kW
Max. torque (ISO Net) @ 1,300-2,200rpm	440Nm
Max. engine RPM	3,000
Engine compliance	ADR 80/04 using Euro 6 Standard
Type	Diesel, turbo & intercooled, 4 cylinder, OHV
Combustion system	Direct injection with EGR
Bore & stroke	104 x 118 mm
Piston displacement	4.009L
Fuel injection system	Electric control common rail
Air cleaner & intake	Under cab mounting dry paper element
Exhaust system	Horizontal outlet RHS
Emission control systems	DPR, DOC and SCR after treatments
Engine immobiliser	Equipped

TRANSMISSION & GEAR RATIOS

Make, model & Description	AUTOMATIC	
	Hino A862E 6 speed with double overdrive	
GEAR RATIOS	1	3.742
	2	2.003
	3	1.343
	4	1.000
	5	0.773
	6	0.634
	Reverse	3.539
Torque Converter & Ratio	1.951	


PERFORMANCE

Models	616 STD	616 WIDE	716 WIDE
Engine RPM @ 100 km/h	2,230	2,165	2,246
Max theoretical speed km/h	135		134
Gradeability tan @ GVM	60%		
Rear axle ratio	4.625		4.875

BRAKES

Models	616 STD & WIDE	716 WIDE
Type	Ventilated disc front & rear	
Control	Dual circuit VOH with power brake assist	
Disc diameter	Front 296mm Rear 281mm	Front 287mm Rear 287mm
Exhaust Brake	Equipped	
Park brake	Drum acting on transmission output shaft	

POWER & TORQUE CHART (ISO NET) N04C-WN

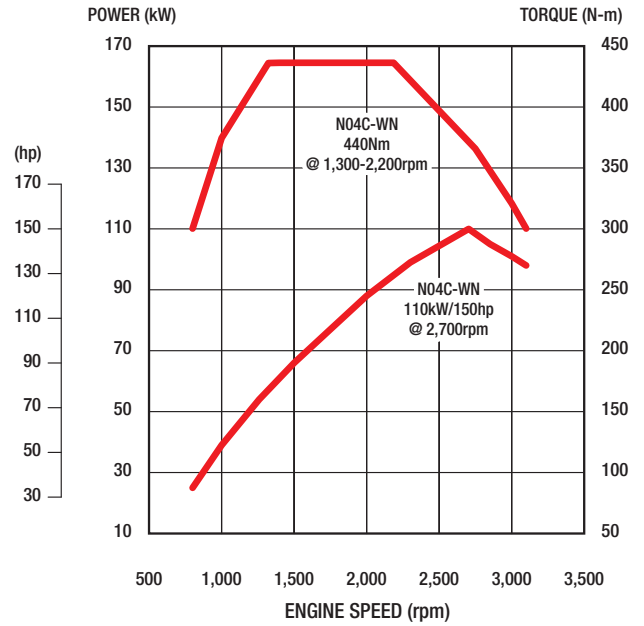

SAFETY FEATURES

Active Safety Features			
Vehicle Stability Control	VSC	Equipped	
Anti-lock Brakes System	ABS	Equipped	
Pre-Collision System	PCS	Equipped	
PCS is inclusive of	Autonomous Emergency Braking		AEB
	Pedestrian Detection		PD
	Lane Departure Warning System		LDWS
Traction Control	TC	Equipped	
Reverse Camera	RC	Equipped	
Daytime Running Lamps	DRL	Equipped	
Reverse Buzzer	Equipped		
Passive Safety Features			
ECE-R29 Cab Strength Certification			Equipped
SRS airbags for driver & side passenger			Equipped
SRS seatbelt pretensioner for driver & side passenger			Equipped
Shock absorbing & collapsible steering column			Equipped
Door Beams (anti side intrusion)			Equipped

AXLE, SUSPENSION & LOAD LIMITS

	Models	616 STD	616 WIDE	716 WIDE
FRONT	Front Axle Type	IFS	Reverse Elliot I-beam	
	Suspension	Coil spring	Taper leaf	
	Axle Limit (incl suspension)	2,400kg	2,600kg	3,100kg
	Tyre limit	2,180kg	2,360kg	2,570kg
REAR	Rear Axle Model & Type	SH12 fully floating single reduction		
	Suspension	Taper leaf spring, Shock absorbers & Stabiliser bar		
	Axle Limit (incl suspension)	4,400kg		5,100kg
	Tyre Limit	4,120kg	4,400kg	4,860kg

CHASSIS FRAME

Type	Ladder-shaped channel section side rails		
Model	616 STD	616 WIDE	716 WIDE
Depth Flange Thickness in mm	177.8 x "60 x 4.9	190.8 x 65 x 4.9	192.8 x 65 x 5.9
Chassis width (at rear)	700mm	750mm	
Tensile Strength	540 N/mm ²		
Tow Hook	Equipped (Front and Rear)		

WHEELS & TYRES

Model	616 STD	616 WIDE	716 WIDE
Wheel type	5-Stud		6-Stud
Rim size	16" x 5.5" Offset 113mm		
Tyre size	185/16	195/16	205/16
Number of wheels and tyres	Seven (7) including spare		
Spare tyre carrier	Equipped		

FUEL TANK & SUPPLY

Wheelbase variants	2,525	3,375	2,810	3,434
Material	Steel			
Tank Capacity	70L	100L	80L	150L
Lockable fuel cap	Equipped			
Fuel Filter	Primary, secondary & sedimenter			
Adblue [®] Tank (L)	13			

ELECTRICAL

Type	24 volt negative earth system		
Batteries	12 volt x 60 AH 55D23L x 2		
Alternator capacity	80 amp		
Starter type	24V-4.5kW		
Headlamps & Foglamps	LED		
Day time Running Lamps (DRL's)	LED		
Electric horn	Equipped		
Reverse Buzzer	Equipped		

STEERING

Type	Telescopic and Tilt adjustable steering column, recirculating ball integral power steering		
Steering Angle	616 STD	Inside 39°	Outside 35°
	616 WIDE	Inside 51°	Outside 36°
	716 WIDE	Inside 50°	Outside 36°

GENUINE ACCESSORY OPTIONS

Bullbar	GPS navigation with live traffic truck spec
Chrome wheel covers	Nudge bar
Cameras (up to additional 5 extra)	Seat covers (Wool, Canvas, Carbon)
Dash Camera (DVR camera system)	Stone guard
Dash mat	Sunvisor
Floor mats	Weathershields

Please check with your dealer for availability, price & fitment

CAB EXTERIOR

Type	Forward control, all steel, welded construction, torsion-bar tilt mechanism, fully trimmed
Windscreen wipers washers	Dual wiper arms with intermittent & 2 speeds
Grille Colour	Painted same colour as the cab
Outside rearview mirrors	2 Flat type main, heated & electric control
	2 convex spotter type, mounted below the main
Windscreen Glass	Heat absorbing laminated glass




CAB INTERIOR

Seating Capacity	Three (3)	
Driver's seat	2-way adjustable, urethane foam pads	
Assistant's Seat	Fixed bench, split back, urethane foam pads	
Seat Covering	Fabric cover	
Seat belts	Driver's seat	3-point Lap / Sash type with ELR and pre-tensioner
	Assistant's seat	
	Centre seat	2-point Lap type
SRS airbags	Driver & side passenger	
Sunvisor & overhead consoles	Driver & side passenger	
Inside rearview mirror	Single centre mounted flat type	
Lighter / 24 volt socket	Equipped	
Multimedia system	10.1" UXGA capacity touch screen, wireless Apple CarPlay and Android auto compatible, AM/FM+RDS/DAB + radio, Bluetooth 5.0 phone and audio, input for up to 6 cameras, USB 2.0 and 3.0, 2.4 Ghz Wi-Fi enabled	
Heater & Air conditioner	Equipped with 4 speed fan	
Central & remote door locking	Equipped with Immobiliser	
Power windows	Equipped	
Drivers footrest	Equipped for Auto models	
Driver's seat back pocket	Equipped	
Centre fold down tray	Equipped	
Cup holders	Sides of dash	
Tool kit & Jack	Equipped	
1 courtesy & 2 LED reading lights	Equipped	

INSTRUMENTATION & CONTROLS

Meters & Gauges	Multi Information Display (MID)
Speedometer	Safety feature settings
Tachometer	General information settings
LCD Display	Eco driving
Clock	DPR filter gauge
Battery warning	Cruise control settings
Coolant	Dash mounted switches
Fuel	Heater & A/C controls
ODO meter	LDWS off
Steering wheel & Column controls	PCS off
MID setting	VSC off
Cruise control settings	Headlight leveller
Hands free phone	Hazard lights
Lights & Indicator	DPR manual regeneration
Exhaust brake & wiper washer	

Alloy Tray Range

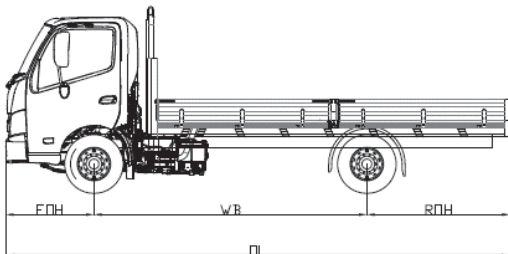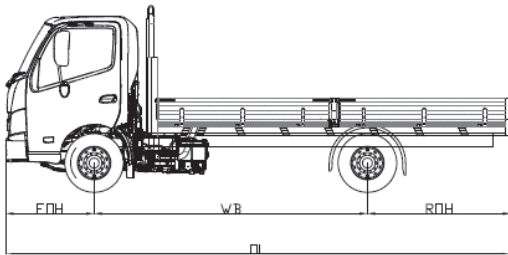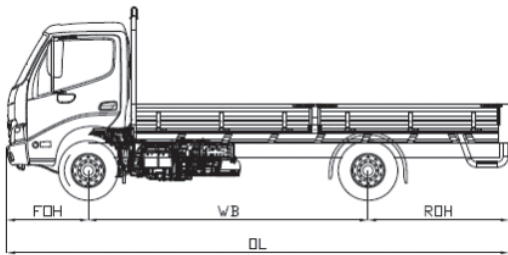

DIMENSIONS (MM) / WEIGHTS (KG) / CAPACITIES (L)

Model Description	616 AT 2525 STD ALLOY TRAY	616 AT 3375 STD ALLOY TRAY	616 AT 2810 WIDE ALLOY TRAY	616 AT 3430 WIDE ALLOY TRAY	716 AT 3430 WIDE ALLOY TRAY	
Product Code	XZU605R- WKTMOVQ3 AL	XZU655R- WKTMOVQ3 AL	XZU700R- WKTMOVQ3 AL	XZU710R- WKTMOVQ3 AL	XZU710R- WKTQVQ3 AL	
ALLOY TRAY body details						
Internal body length	3,080	4,435	3,535	4,435		
Internal body width	1,800		2,055			
Floor rating	4,000					
Drop side height	257		365			
Front steps	Equipped Left & Right sides					
DIMENSIONS - (MM) / WEIGHTS - (kg)						
Wheelbase (WB)	2,525	3,375	2,810	3,430		
Overall length (OL)	4,765	6,120	5,435	6,335		
Overall width (OW)	1,880		2,135			
Cab width	1,695		1,995			
Overall height (OH)	2,300		2,460		2,500	
Front Overhang (FOH)	980		1,125			
Road Clearance (RC)	170			185		
Front Track (FT)	1,400		1,655			
Rear Track (RT)	1,435		1,480			
Turning Circle	Kerb to Kerb	9,600	12,600	9,800	11,800	11,400
	Wall to Wall	10,800	13,800	11,200	13,200	12,800
Indicative chassis mass - kg (STD tools, 10 litres of fuel, spare tyre & subject to a +/- 3% tolerance)						
Total	2,349	2,446	2,605	2,641	2,756	
Front	1,464	1,516	1,678	1,686	1,731	
Rear	885	930	927	955	1,025	
Standard Ratings	GVM	4,499			6,500	
	GCM	7,999			10,000	
Optional Ratings	GVM	5,500			4,499	
	GCM	8,000			7,999	

Drawings are for reference only to the table. For specific layouts please refer to the Body Mounting Manual drawings.

WARRANTY

New vehicle warranty period

Light Duty Model	Axle configuration	Standard warranty (whichever comes first)
300 Series	4 x 2	5 years or 250,000km

Battery warranty – 12 months from date of delivery

* For conditions, refer to the Hino Parts & Service warranty brochure

Genuine parts or accessories warranty – 3 years unlimited kilometres when fitted by an authorised Hino dealer *



DISCLAIMER

Important notice – Hino Trucks are distributed in Australia by Hino Motor Sales Australia Pty Ltd A C N 064 989 724. All efforts have been made to ensure the information contained in this brochure was correct at time of printing or uploading. Hino Motor Sales Australia Pty Ltd reserves the right to alter any details of the specifications and equipment without notice. Hino in so far as it is permitted by law to do so, shall not be liable in any way as a result of any reliance placed by any person on anything contained in this brochure. You should therefore check with your authorised Hino dealer at the time of ordering your motor vehicle to ensure that colour, specifications, equipment, design features and options are available for the vehicle you are ordering. Please note that some options may only be available in combination with others. Authorised Hino dealers will on request provide up to date information on all accessories, design features, prices & availability. **Maximum Cruise control setting 106 km/h. *** GVM ratings of 4,499kg are conditional that the ADR definition of a "Goods Vehicle" can be met.