

## Electric high lift truck DOUBLE-M



### Why DOUBLE-M?

This electric pedestrian stacker with initial lift is ideally suited for storage and retrieval work on shelves. With innovative technology and initial lift, this electric high lift truck is ideally suited to achieve fast and efficient goods handling. A robust, durable model, which is why we offer a 5-year warranty.

- Ideally suited for problem-free loading and unloading of trucks and racks due to **initial lift**
- With its **small turning radius of 1575 mm**, the unit is also ideally suited for narrow storage aisles
- The max. travel speed of 5.8 km/h (loaded) is ideally suited for **usage** in logistics, warehousing and commercial applications

- Powerful 240 Ah **lead battery**
- The **energy level indicator** provides a constant overview of the remaining battery life
- Wear-free braking of the lift truck thanks to **electromagnetic braking system**
- **Highest safety standards** thanks to safety and emergency stop switch as well as rounded transport forks

## Technical data

### Electric high lift truck DOUBLE-M


#### OPTIONS Choose between

1

Load capacity	1500 kg
Lifting height (h3)	2.5   3.0   3.5   4.5   5.0   5.6m
Max. total height (h4)	2979   3477   3977   4952   5442   6042 mm
Min. total height (h1)	1757   2007   2257   2022   2182   2382 mm
Free lift (h2)	1300   1550   1800   1570   1740   1940 mm
Weight	1205 kg

#### DIMENSIONS

Fork length	1150 mm	l
Width	820 mm	b1
Length	1982 mm	l1
Outer fork width	570 mm	b5
Ground clearance	15 mm	m2
Distance between forks	210 mm	
Height from ground	90 mm	h13
Individual fork width	180 mm	e
Centre of gravity	600 mm	c

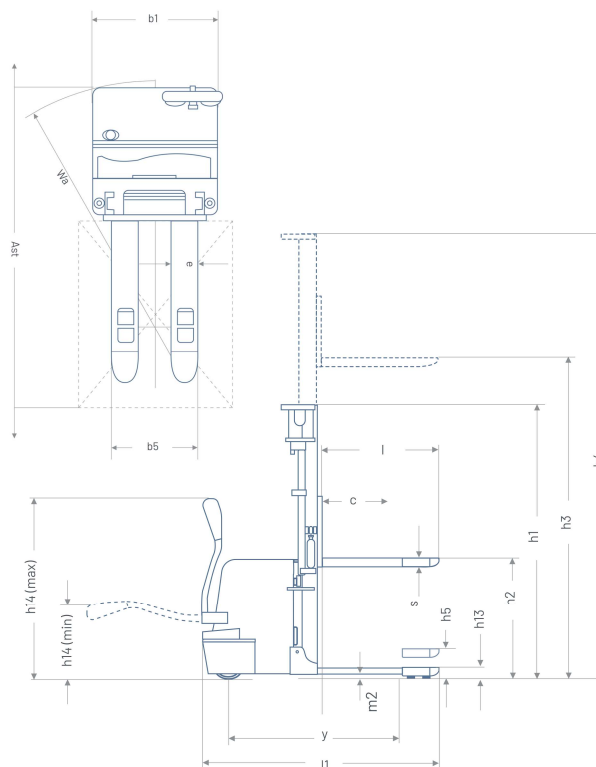

#### GENERAL INFORMATION

Material	Steel
Driving distance	Average distance
Sound pressure level according to EN 12053	70 db(A)
Forklift license	No
Chassis surface	Powder-coated

#### BATTERY

Battery type	Lead
Battery weight	220 kg
Battery capacity	240 Ah
Operating period	30 h
Charging time	9 h
Battery voltage	24 V
Number of batteries	1

#### Lift

Lift type	Electrical hydraulic	
Initial lifting height	120 mm	h5
Motor output	1.2 kW	

#### TYRES

Material of tyres	Polyurethane (PU)
Fork rolls	Tandem
Width of casters	70 mm
Diameter of casters	80 mm
Width of swivel casters	70 mm
Diameter of casters	250 mm

We are improving our products continuously. It is therefore possible that technical data changes without prior notice. Product image and drawings can deviate depending on design and year of manufacture. Details to our manufacturer "Plus warranty" available under Declaration of warranty. The platform trolley complies with the EC Safety regulations.

## Images

Electric high lift truck DOUBLE-M



## Images

Electric high lift truck DOUBLE-M



## Why Pallit?

- Delivery free of charge within 1-3 workdays
- 100 days right of return
- Five year basic warranty for all platform trolleys
- Live-long first aid in case of technical questions
- On-site repair service available



Questions? Contact our product experts.

☎ 0800 - 000 96 25