

Electric lifting truck TWO



Why the TWO?

The TWO electric pallet truck for 2000 kg is particularly suitable for daily use due to its solid construction. The small turning circle makes the professional device particularly convincing in areas with little space, such as in supermarkets, small storage rooms or in the narrow aisles between storage shelves.

- **Lead battery** with 210 Ah capacity ensures long and intensive use
- Increased manoeuvrability due to **low turning radius** of 1450 mm and **creep mode**: lift truck is operated with the tiller completely raised in the process

- Side-mounted **battery with roll-out system** for convenient removal to connect to an external charger for charging
- **Curved, long tiller** allows for easy and uncomplicated steering
- All **functions**, such as infinitely variable speed control, are controlled by the ergonomically designed handle
- A **max. travel speed of 5.6 km/h** is achieved when unloaded.
- Strong and powerful - even in the long run: That's why we offer our **Plus warranty for 5 years**

Technical data



Electric lifting truck TWO

DIMENSIONS

Fork length	1150 mm	l
Width	775 mm	b1
Length	1705 mm	l1
Outer fork with	550 mm	b5
Wheel base	1261 mm	y
Ground clearance	28 mm	m2
Distance between forks	190 mm	
Height from ground	82 mm	h13
Height of drawbar	1200 mm	h14
Individual fork width	180 mm	e
Centre of gravity	600 mm	c
Turning radius	1450 mm	Wa
Min. aisle width (EPAL1 Euro pallets)	2115 mm	Ast

GENERAL INFORMATION

Load capacity	2000 kg
Material	Steel / 100% PES
Weight	640 kg
Driving distance	Average distance
Chassis surface	powder-coated

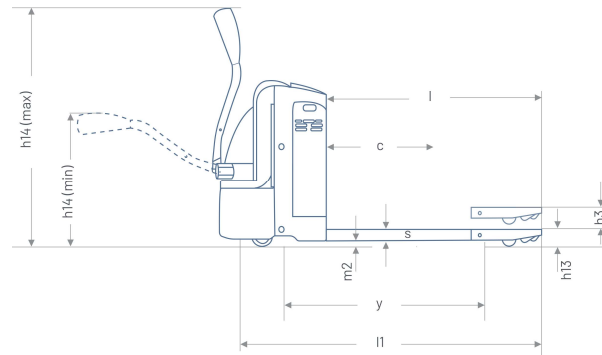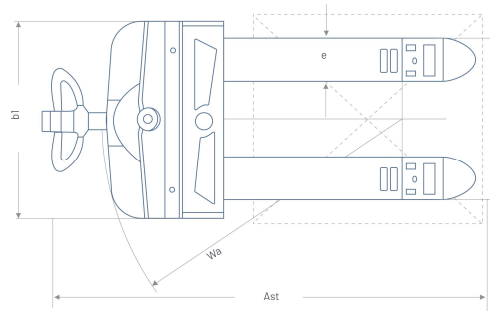

Drive

Type of drive	AC motor
Rising capacity, unloaded	12 %
Rising capacity, loaded	6 %
Motor output	1.2 kW
Drive speed loaded	5.5 km/h
Drive speed unloaded	5.6 km/h

BATTERY

Battery type	Leda battery
Battery size	750x170x534 mm
Battery weight	196 kg
Battery capacity	210 Ah
Battery voltage	24 V
Battery level display	Yes
Number of batteries	1

LIFT

Lifting height (h3)	202 mm
Lift type	Electrical
Lifting speed, loaded	0.039 m/s
Effective lift	120 mm

TYRES

Material of tyres	Polyurethane (PU)
Fork rolls	single
Width of casters	126 mm
Diameter of casters	82 mm
Width of swivel casters	70 mm
Diameter of casters	250 mm

We are improving our products continuously. It is therefore possible that technical data changes without prior notice. Product image and drawings can deviate. Excluded from our manufacturer's warranty "Plus-Guarantee" are wear parts, rechargeable batteries and power packs - details can be found in our warranty declaration. The platform trolley complies with the EC Safety regulations.

Images

Electric lifting truck TWO



Images

Electric lifting truck TWO



Why Pallit?

- Delivery free of charge within 1-3 workdays
- 100 days right of return
- Live-long first aid in case of technical questions
- On-site repair service available



Questions? Contact our product experts.

☎ 0800 - 000 96 25