

Electrical high lift truck ULTRA-L



Why the ULTRA-L?

The electric high lift truck ULTRA-L from Pallit with triplex mast is ideal for storing and retrieving palletised goods up to 1500 kg in high racks or loading and unloading trucks without a loading ramp thanks to its lifting height. The high lift truck is robust, durable and designed for intensive continuous use.

- **Three options** to choose from: The ULTRA-L is available with lift heights of 4.5 m, 5 m and 5.6 m
- Powerful 240 Ah **lead batteries** for long operating times
- No forklift license required for operation

- **Regenerative, electromagnetic braking system**
- The **battery level indicator** allows the operator to keep an eye on the battery level at all times
- With **free lift function** so that the overall height does not change up to 1570 | 1740 | 1940 mm - ideal for low spaces
- Small turning radius for narrow storage aisles
- Strong and powerful - even in the long run: That's why we offer our **Plus Warranty for 5 year**

Technical data

Electrical high lift truck ULTRA-L


OPTIONS Choose between

1 | 2 | 3

Lifting height	4.5 5 5.6 m
Max. total height	5030 5510 6110 mm
Min. total height	2050 2210 2410 mm
Weight	1370 1400 1530 kg

DIMENSIONS

Fork length	1150 mm	l
Width	820 mm	
Length	1950 mm	l1
Outer fork width	570 mm	
Ground clearance	31 mm	m ²
Distance between forks	210 mm	
Height from ground	90 mm	h13
Height of drawbar	1300 mm	h14
Individual fork width	180 mm	
Centre of gravity	600 mm	c
Turning radius	1575 mm	
Min. aisle width (EPAL1 euro-pallet)	2450 mm	

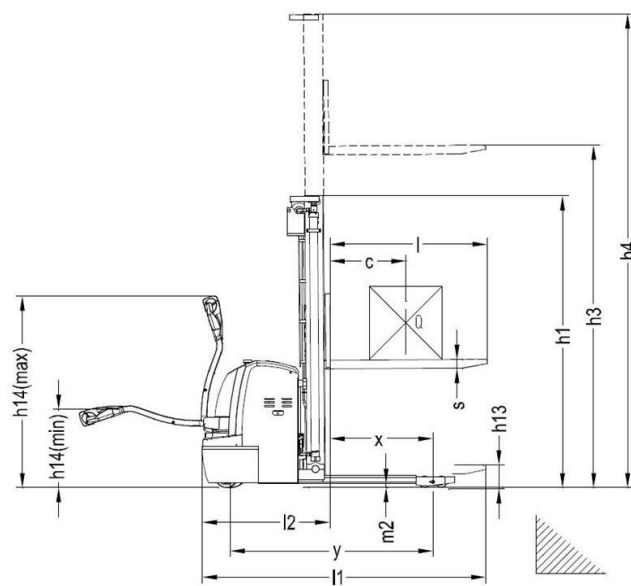

GENERAL INFORMATION

Load capacity	1500 kg
Type of drive	Electrical
Drive speed unloaded	6 km/h
Material	Steel
Type of brakes	Electromagnetic
Sound pressure level according to EN 12053	65 db(A)

BATTERY

Battery type	Lead
Battery weight	220 kg
Battery capacity	240 Ah
Battery level indicator	Yes
Operating period	6 h
Battery voltage	24 V
Charger	External, included

Lift

Lift type	Electrical hydraulic
Lifting speed, unloaded	0.11 m/s
Motor output, lift	3 kW

TYRES

Material of tyres	Polyurethane (PU)
Casters	Tandem
Width of casters	84 mm
Diameter of casters	80 mm
Width of swivel casters	80 mm
Diameter of casters	250 mm

We are improving our products continuously. It is therefore possible that technical data changes without prior notice. Excluded from our manufacturer's warranty "Plus-Guarantee" are wear parts, rechargeable batteries and power packs - details can be found in our warranty declaration. The platform trolley complies with the EC Safety regulations.



Images

Electrical high lift truck ULTRA-L



Images

Electrical high lift truck ULTRA-L

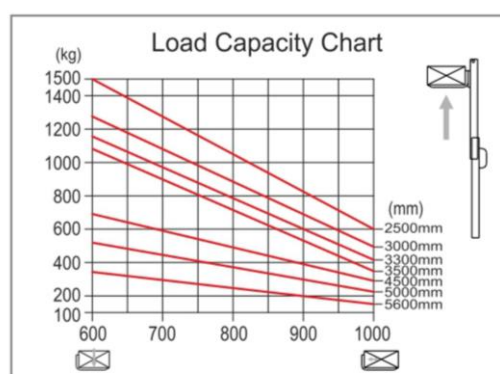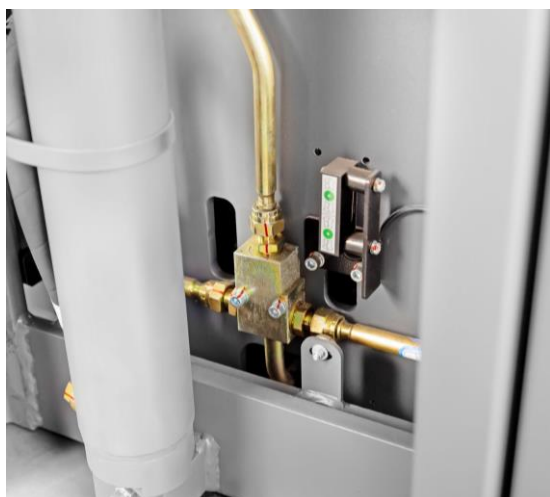

Why Pallit?

- Delivery free of charge within 1-3 workdays
- 100 days right of return
- Live-long first aid in case of technical questions
- On-site repair service available



Questions? Contact our product experts.

☎ 0800 - 000 96 25