

Electrical high lift truck ULTRA-XL





Why the ULTRA-XL?

The Pallit ULTRA-XL electric high lift truck with triplex mast is a professional model and designed for daily industrial use. Loads up to 1500 kg can be easily transferred to high racks or truck trailers.

- Seven options: Lifting heights from
 2.5 m up to 5.6 m
- Proportional valves for fast and finely metered lifting and lowering
- Powerful 300 Ah lead batteries for long operating times
- Wear-free braking due to electromagnetic braking system

- With multifunction display for battery status and operating hours overview
- With free lift function so that the headroom does not change - ideal for low spaces or containers
- High manoeuvrability due to small size and steering radius
- External charger included
- Strong and powerful even in the long term: That's why we offer our Plus warranty for 5 years



Technical data

Electrical high lift truck ULTRA-XL


OPTIONS Choose between

| 0 | 2 | 8 | 4 | 6 | 6 | 7 | 8 |
|---|---|---|---|---|---|---|---|
|---|---|---|---|---|---|---|---|

| Lifting height | 2.5 3 3.3 3.5 4 4.5 5 5.6 m |
|-------------------|--|
| Max. height | 2955 3455 3755 3955 4530 5030 5510 6110 mm |
| Min. total height | 1735 1985 2135 2235 1890 2050 2210 2410 mm |
| Weight | 1190 1240 1250 1340 1380 1420 1450 1580 kg |

DIMENSIONS

| Fork length | 1150 mm | I |
|--------------------------------------|---------|----------------|
| Width | 820 mm | |
| Length | 1950 mm | I1 |
| Outer fork with | 570 mm | |
| Ground clearance | 31 mm | m ² |
| Distance between forks | 210 mm | |
| Height from ground | 90 mm | h13 |
| Height of drawbar | 1300 mm | h14 |
| Individual fork width | 180 mm | |
| Centre of gravity | 600 mm | С |
| Turning radius | 1575 mm | |
| Min. aisle width (EPAL1 euro-pallet) | 2452 mm | |

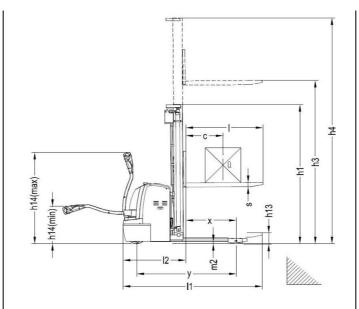

GENERAL INFORMATION

| Load capacity | 1500 kg |
|--|-----------------|
| Type of drive | Electrical |
| Material | Steel |
| Drive speed unloaded | 6 km/h |
| Type of brakes | Electromagnetic |
| Sound pressure level according to EN 12053 | 65 db(A) |

BATTERY

| Battery type | Lead |
|----------------|--------|
| Battery weight | 260 kg |

| Battery capacity | 300 Ah |
|-------------------------|--------------------|
| Number of batteries | 1 |
| Battery level indicator | Yes |
| Operating period | 4 h |
| Battery voltage | 24 V |
| Charger | External, included |

LIFT

| Lift type | Electrical hydraulic |
|-------------------------|----------------------|
| Lifting speed, unloaded | 0.19 m/s |
| Motor output, lift | 3 kW |

TYRES

| Material of tyres | Polyurethane (PU) |
|-------------------------|-------------------|
| Casters | Tandem |
| Width of casters | 84 mm |
| Diameter of casters | 80 mm |
| Width of swivel casters | 70 mm |
| Diameter of casters | 250 mm |

We are improving our products continuously. It is therefore possible that technical data changes without prior notice. Excluded from our manufacturer's warranty "Plus-Guarantee" are wear parts, rechargeable batteries and power packs - details can be found in our warranty declaration. The platform trolley complies with the EC Safety regulations.



Images

Electrical high lift truck ULTRA-XL

















Images

Electrical high lift truck ULTRA-XL









Why Pallit?

- Delivery free of charge within 1-3 workdays
- $\circ \quad 100 \ days \ right \ of \ return$
- Live-long first aid in case of technical questions
- o On-site repair service available





Questions? Contact our product experts.

© 0800 - 000 96 25