

Electric lifting truck ONE-M



Why the ONE-M?

This electric pallet truck from our ONE series with lithium-ion battery is designed for daily use. Compared to its little sister ONE-S, the ONE-M is more robust and designed for intensive use.

- Suitable for **continuous daily use** to transport palletised goods up to 1500 kg
- **Easy handling** due to digital display, keypad for keyless locking function and creep speed when forks are upright for easy manoeuvring of goods
- **Efficient goods transport:** operating time of 6 hours and fast charging time of 3 hours - multi-shift operation is possible with an exchangeable battery (available separately).

- **Battery change** with only one handle and without additional tools
- The **lithium-ion battery** with 48 V / 20 Ah power is completely maintenance-free
- The ONE-M lithium pallet truck is **used** in wholesale and retail, in production and by haulage companies
- Strong and powerful - even in the long term: That's why we offer our **Plus guarantee for 5 years**

Technical data


Electric lifting truck ONE+M

DIMENSIONS

Fork length	1150 mm	l
Width	550 mm	b1
Length	1623 mm	l1
Outer fork width	550 mm	b5
Wheel base	1269 mm	y
Ground clearance	35 mm	m2
Distance between forks	230 mm	
Height from ground	80 mm	h13
Height of drawbar	1200 mm	h14
Individual fork width	160 mm	e
Centre of gravity	600 mm	c
Turning radius	1424 mm	Wa
Min. aisle width (EPAL1 Euro pallets)	2095 mm	Ast

GENERAL INFORMATION

Load capacity	1500 kg
Material	Steel
Weight	140 kg
Type of brakes	Electromagnetic
Sound pressure level according to EN 12053	70 db(A)

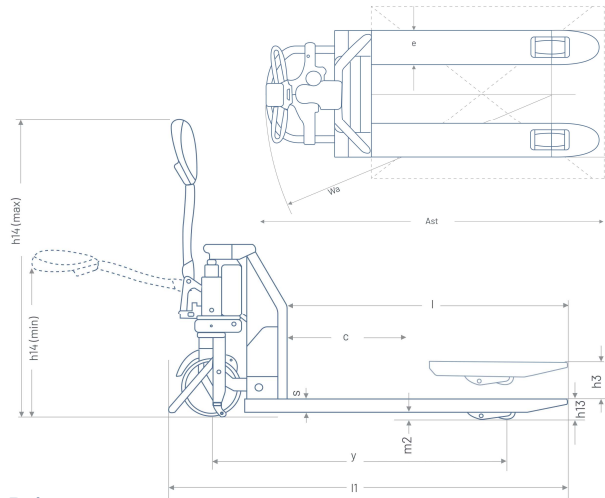

Drive

Type of drive	Electric motor
Rising capacity, unloaded	20 %
Rising capacity, loaded	5 %
Motor output	0.65 kW
Drive speed loaded	4.8 km/h
Drive speed unloaded	5 km/h

BATTERY

Battery type	Lithium-ion
Operating period	6 h
Charging time	3 h
Battery weight	10 kg
Battery capacity	20 Ah

Battery voltage	48 V
Battery level display	Yes
Number of batteries	1
Charger	External, included

Lift

Lifting height (h3)	200 mm
Lift type	Electrical
Lifting speed, loaded	0.03 m/s
Lifting speed, unloaded	0.035 m/s
Motor output	0.8 kW



TYRES

Material of tyres	Polyurethane (PU)
Casters	Tandem
Width of casters	70 mm
Diameter of casters	80 mm
Width of swivel casters	70 mm
Diameter of casters	210 mm
Intake rollers	Yes

We are improving our products continuously. It is therefore possible that technical data changes without prior notice. Product image and drawings can deviate. Excluded from our manufacturer's warranty "Plus-Guarantee" are wear parts, rechargeable batteries and power packs - details can be found in our warranty declaration. The platform trolley complies with the EC Safety regulations.


Images

Electric lifting truck ONE+M

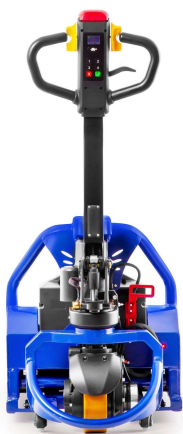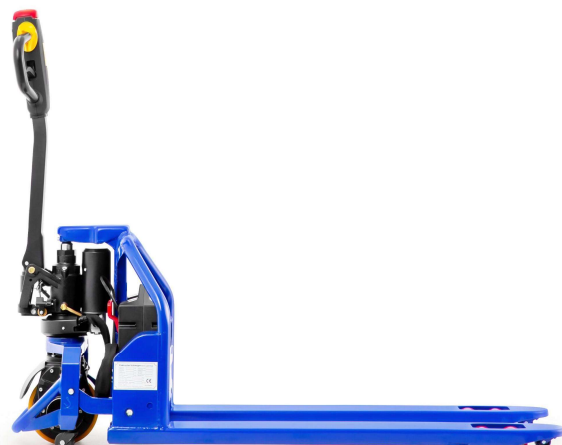

Images

Electric lifting truck ONE+M

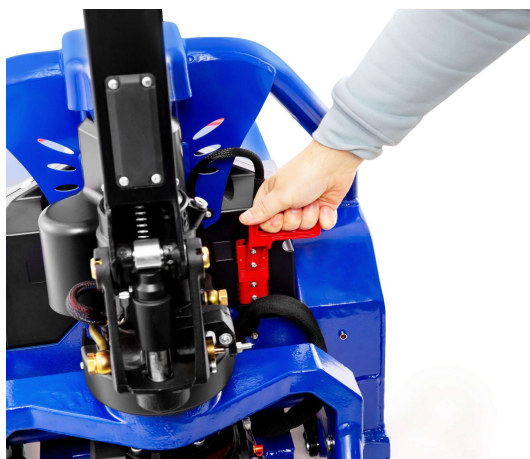

Why Pallit?

- Delivery free of charge within 1-3 workdays
- 100 days right of return
- Live-long first aid in case of technical questions
- On-site repair service available



Questions? Contact our product experts.

☎ 0800 - 000 96 25