

# Electric pallet truck TWO-MAX





## Why the TWO-MAX?

The TWO-MAX electric pallet truck for 2000 kg is particularly suitable for daily use thanks to its solid construction. Thanks to its small turning circle, the professional device is particularly impressive in areas with limited space, such as supermarkets, small storage rooms or in the narrow aisles between storage racks. The all-electric drive supports the lifting and moving of Euro pallets.

- Fork length: 1600 mm
- Lead-acid battery with 210 Ah capacity ensures long and intensive use
- Increased maneuverability thanks to a small turning radius of 1450 mm and creep mode: pallet truck is operated with the tiller fully raised

- Side-mounted battery with roll-out system for easy removal to connect to an external charger for charging
- **Curved, long drawbar** enables simple and uncomplicated steering
- All **functions**, such as the infinitely variable speed control, are controlled via the ergonomically shaped handle
- When unloaded, a **maximum driving speed of 5.6 km/h** is achieved.



### **Technical data**


Electric pallet truck TWO-MAX


#### DIMENSIONS

Fork length	1600 mm	I
Width	775 mm	b1
Length	2155 mm	1
Fork width outside	550 mm	b5
Wheelbase	1711 mm	у
Ground clearance	28 mm	m2
Distance between forks	190 mm	
Height from ground	82 mm	h13
Drawbar height	1230 mm	h14
Fork width single	180 mm	е
Load center	800 mm	C
Turning radius	1900 mm	Wa
Min. aisle width (EPAL1 Euro pallets)	2565 mm	Branch

#### GENERAL

Load capacity	2000 kg
Material	Steel / 100% PES
Weight	670 kg
Route	Middle distance
Chassis surface	powder-coated





#### DRIVE

Drive type	Alternating current motor
Climbing ability, unloaded	12 %
Climbing ability, loaded	6 %
Motor power	1.2 kW
Travel speed, loaded	5.5 km/h
Travel speed, unloaded	5.6 km/h

#### BATTERY

Battery type	Lead battery
Battery size	750x170x534 mm
Weight of the battery	196 kg
Battery capacity	210 Ah
Battery voltage	24 V
Battery level indicator	Yes
Number of batteries	1

#### LIFT

Lifting height (h3)	202 mm
Lift	Electric
Lifting speed, loaded	0.039 m/s
Effective stroke	120 mm


#### TREATMENT

Tire material	Polyurethane (PU)
Fork rollers	Single
Wide castors	126 mm
Diameter of rollers	82 mm
Wide swivel castors	70 mm
Castor diameter	250 mm

We are continuously improving our products. For this reason, technical data may change without prior notice. Product images and sketches may vary. Wear parts, rechargeable batteries and batteries are excluded from our manufacturer's "Plus Warranty" - details can be found in our warranty declaration. The pallet truck complies with EU safety regulations.

# **Pictures**

Electric pallet truck TWO-MAX

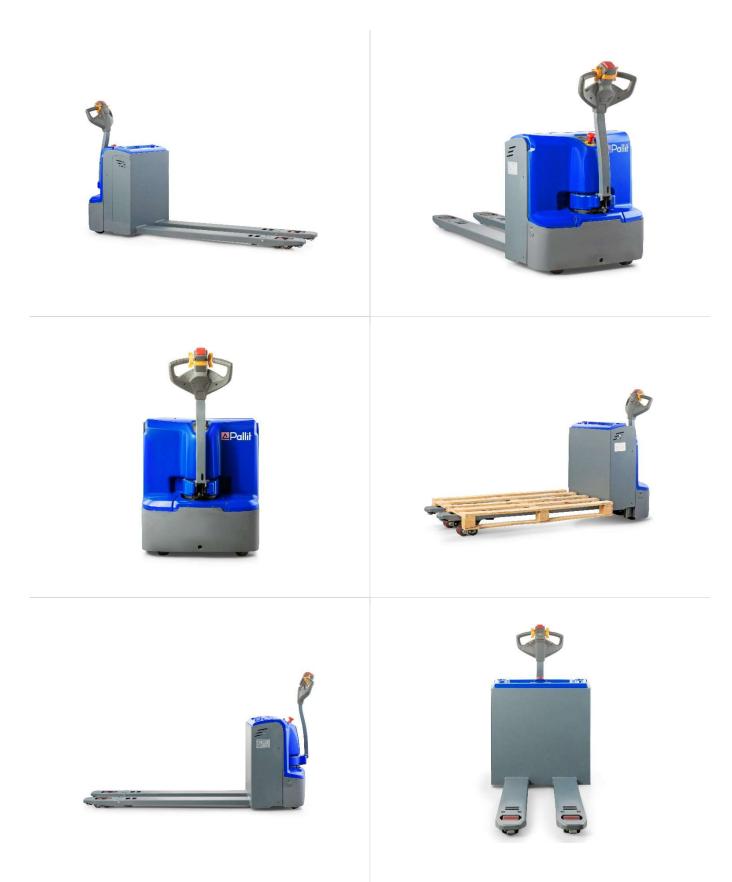



## **Pictures**

Electric pallet truck TWO-MAX









## Why Pallit?

- $\circ$  Free delivery in 1-3 working days
- 100-day return policy
- First aid for technical issues for life
- On-site repair service available



Questions? Talk to our product experts.

## Ø 0800 - 000 96 25

