

Electric lifting truck ONE-XL



Why the ONE-XL?

The ONE-XL electric pallet truck with maintenance-free lithium-ion battery is designed for continuous daily use with palletised goods up to 2000 kg and due to its low dead weight. The ONE-XL is robust, durable and charges very quickly.

- **Short charging time** of 2.5 h with an operating time of 5 h
- **Fully electric lifting mechanism** for efficient transport work
- Worm gear for **confined spaces**: Driving with upright tiller
- Release by **pin code** - with LED lighting
- The **lithium-ion battery** with 48 V / 20 Ah power is completely maintenance-free

- The ONE-XL lithium pallet truck is **utilised** in wholesale and retail, in production and by haulage companies
- **Continuous charging and complete discharge** possible - without memory effect: loss of energy capacity due to premature charging
- Strong and powerful - even in the long term: That's why we offer our **Plus guarantee for 5 years**

Technical data


Electric lifting truck ONE-XL

DIMENSIONS

Fork length	1150 mm	l
Width	540 mm	b1
Outer fork width	540 mm	b5
Ground clearance	33 mm	m2
Distance between forks	220 mm	
Height from ground	80 mm	h13
Height of drawbar	962 mm	h14
Individual fork width	160 mm	e
Centre of gravity	600 mm	c
Turning radius	1336 mm	Wa
Min. aisle width (EPAL1 Euro pallets)	2006 mm	Ast

GENERAL INFORMATION

Material	Steel
Type of brakes	Electromagnetic
Sound pressure level according to EN 12053	70 db(A)
Load capacity	2000 kg
Length	1536 mm
Weight	149 kg

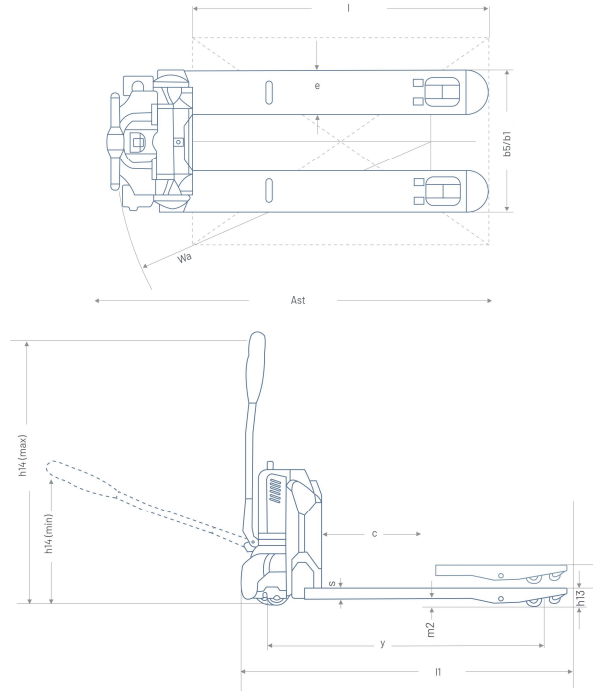

Drive

Type of drive	Electrical
Rising capacity, unloaded	16 %
Rising capacity, loaded	7 %
Motor output	0.75 kW
Drive speed unloaded	5.8 km/h

BATTERY

Battery type	Lithium-ion
Operating period	5 h
Charging time	2.5 h

Battery weight	7.5 kg
Battery capacity	20 Ah
Battery voltage	48 V
Battery level display	Yes
Number of batteries	1
Charger	External, included

Lift

Lifting height (h3)	115 mm
Lift type	Electrical hydraulic
Lifting speed, unloaded	0.02 m/s
Motor output	0.8kW


TYRES

Material of tyres	Polyurethane (PU)
Casters	Tandem
Width of casters	93 mm
Diameter of casters	80 mm
Width of swivel casters	70 mm
Diameter of casters	210 mm
Intake rollers	Yes

We are improving our products continuously. It is therefore possible that technical data changes without prior notice. Excluded from our manufacturer's warranty "Plus-Guarantee" are wear parts, rechargeable batteries and power packs - details can be found in our warranty declaration. The platform trolley complies with the EC Safety regulations.

Images

Electric lifting truck ONE-XL

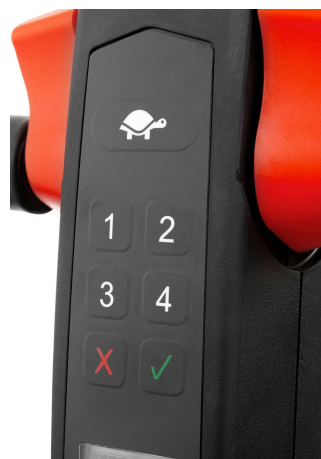

Images

Electric lifting truck ONE-XL



Why Pallit?

- Delivery free of charge within 1-3 workdays
- 100 days right of return
- Live-long first aid in case of technical questions
- On-site repair service available



Questions? Contact our product experts.

📞 0800 - 000 96 25