

Partially stainless steel lift table trolley INOXX-L





The partially stainless steel lift table trolley, made of stainless steel and galvanised steel, is perfect for lifting and transporting loads in environments with strict hygiene regulations. Its stainless steel material makes it ideal for the food, pharmaceutical and chemical industries.

- The large platform ensures a practical storage area
- Lifting height of 890 mm thanks to a stable scissor brace
- Platform, chassis and push handle made of stainless steel, secondary parts galvanised
- Maximum load capacity of up to 250 or 450kg depending on the variant
- Easy lifting via foot pedal
- Stepless lowering by hand lever



- Safe parking of the lift table trolley thanks to the parking brake
- Enables comfortable, ergonomic working thanks to the flexibly adjustable table height

Technical data

Partially stainless steel lift table trolley INOXX-L

DIMENSIONS


Option	0 0	
Platform size	815x500mm	lxb5
Width	500mm	b1
Length	825mm	I1
Drawbar height	890mm	h14
Min. platform height	290mm	h13

GENERAL

Load capacity	250 450kg
Material	Partially stainless steel
Weight	66 78kg
Drive type	manually

STROKE

Type of stroke	Manual hydraulic	
Lifting height	890mm	h3
Effective Stroke	600mm	h12

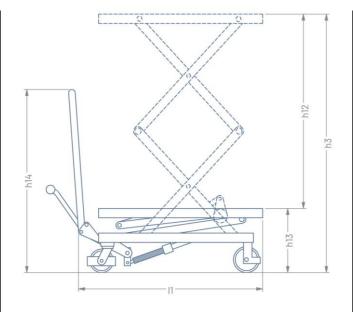



TREATMENT

Tyre material	Polyurethane (PU)
Diameter of rollers	100 125mm
Wide castors	30 35mm
Castor diameter	100 125mm
Wide swivel castors	30 35mm

We are continuously improving our products. For this reason, technical data may change without prior notice. Details of our manufacturer's guarantee "Basic guarantee" can be found in our guarantee declaration. The lift table trolley complies with EU safety regulations.



Pictures

Partially stainless steel lift table trolley INOXX-L















Pictures

Partially stainless steel lift table trolley INOXX-L









Why Pallit?

- o Free delivery in 1-3 working days
- o 100-day right of return
- Five-year basic warranty on all pallet trucks
- o First aid for technical issues for life
- o On-site repair service available



© 0800 - 000 96 25

