


TF Valve Body detent Ball Bore wear.

Allows use of worn Valve Body with out special Tools. Keeps manual Valve properly indexed.

Discard original Ball & Spring.
Install new Detent Bullet and Spring, hold in place with Mumbly Peg. Position rooster Comb with manual Valve and quickly push Rooster Comb down.
Reassemble the Rooster Comb & remove Mumbly peg.

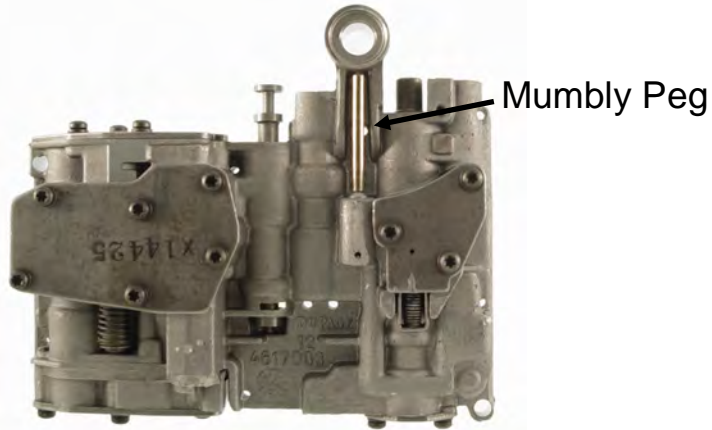

New Detent Bullet & Spring

