

**H.T.C., Inc.**

FAX 712-338-4854

1903 13th Street

Milford, Iowa 51351-1388

1-800-348-4403

[www.htcconveyors.com](http://www.htcconveyors.com)

**Model 1200 Conveyor includes two corner filler plates, a hot asphalt belt driven by a hi-torque, low speed hydraulic motor and manually operated feedgates. Also includes all mounting hardware and rear flap to mount to standard dump body of not more than 96" outside measurement. Longer units available upon request.**

**HYDRAULIC TRUCK CONVEYOR**  
**MODEL 1200 SPECIFICATIONS**

Overall Width -- 103"  
Overall Height -- 21"  
Overall Length -- 37"  
Overall Weight -- 1050#  
Capacity -- 120 T.P.H.

**EQUIPPED WITH:**

- 2 10" x 10" Fully adjustable gate openings to allow for right and/or left hand discharge.
- 1 6" diameter V-Grooved Drive Roller with rubber lagging riveted on.
- 8 4" diameter V-Grooved Idler Rollers.
- 1 6" Tail Roller, fully adjustable.
- 2 Taillights 1 Cluster Light

12" (width) Hot Asphalt Belt with C-Section V-Belt molded in center. (Withstands 350 degrees F.)

High torque low speed Hydraulic Motor requires 10-15 GPM - 2,000 PSI.

Rubber Flashing to forward and rear edges of conveyor belt.

Flap extension for mounting to rear edge of dump box floor.


Self-Leveling at all positions of dump box.

Standard conveyor fits maximum dump box width of 96" (outside measurement). Wider conveyor is available on request.

1/4" Formed Channels

11 ga Formed Hopper with 7 ga Gussets

Conveyor is bolted to the dump box and frame or bolted to the dump box and welded to the frame.

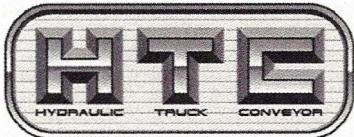

**H.T.C., Inc.**

**FAX 712-338-4854**

1903 13th Street

Milford, Iowa 51351-1388

1-800-348-4403

[sales@htcconveyors.com](mailto:sales@htcconveyors.com)

[www.htcconveyors.com](http://www.htcconveyors.com)

**Model 1800 Conveyor includes two corner filler plates, a hot asphalt belt driven by a hi-torque, low speed hydraulic motor and manually operated feedgates. Also includes all mounting hardware and rear flap to mount to standard dump body of not more than 96" outside measurement. Longer units available upon request.**

**HYDRAULIC TRUCK CONVEYOR**  
**MODEL 1800 SPECIFICATIONS**

Overall Width -- 103"  
Overall Height -- 27  
Overall Length -- 43  
Overall Weight -- 1160#  
Capacity -- 200 T.P.H.

**EQUIPPED WITH:**

- 2 16" x 16" Fully adjustable gate openings to allow for right and/or left hand discharge.
- 1 6" diameter V-Grooved Drive Roller with rubber lagging riveted on.
- 8 4" diameter V-Grooved Idler Rollers.
- 1 6" Tail Roller, fully adjustable.
- 2 Taillights 1 Cluster Light

18" (width) Hot Asphalt Belt with C-Section V-Belt molded in center. (Withstands 350 degrees F.)

High torque low speed Hydraulic Motor requires 10-15 GPM - 2,000 PSI.

Rubber Flashing to forward and rear edges of conveyor belt.

Flap extension for mounting to rear edge of dump box floor.

Self-Leveling at all positions of dump box.

Standard conveyor fits maximum dump box width of 96" (outside measurement). Wider conveyor is available on request.

1/4" Formed Channels

11 ga Formed Hopper with 7 ga Gussets and 11 ga steel

Conveyor is bolted to the dump box and frame or bolted to the dump box and welded to the frame.