



VALLOX X-LINE PTX, PTXP, PTXPA

DIMENSIONS

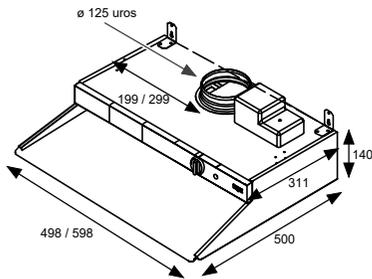

EXTERNAL CONNECTION

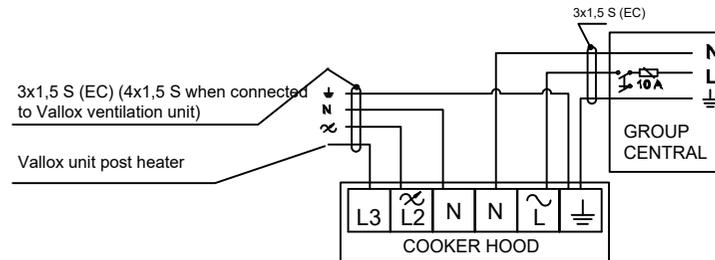

Electrical connections may only be done by an authorized person.

(EC = Electrical Constructor)

DESCRIPTION OF OPERATION

Vallox X-Line PTX

- The cooker hood is equipped with a steam collection part, a fixed glass, a grease filter, a damper, and a fluorescent lamp.
- The cooker hood has a four-speed fan speed adjustment for AC fans (max 340 W) and a 0 position. Control voltages can be pre-selected from eight options.
- The minimum air flow of the cooker hood can be measured.

Vallox X-Line PTXP

- Same as PTX, but forced-operational (no 0 position).

Vallox X-Line PTXPA

- Same as PTXP, but the cooker hood is equipped with a timer damper that remains open for 60 minutes. Potential-free contact data (ends closed) is provided of the position of the damper.

PRODUCT NUMBERS

Model	Width	Color	Product number	HVAC-number	Electrical number
PTX	500	White	2060400	7911114	8503508
PTX	600	White	2060500	7911116	8503509

Malli	Width	Color	Product number	HVAC-number	Electrical number
PTXP	500	White	2060700	7911118	8503510
PTXP	600	White	2060800	7911120	8503511

Malli	Width	Color	Product number	HVAC-number	Electrical number
PTXPA	500	White	2095000	7911126	8503516
PTXPA	600	White	2095300	7911128	8503517

Revision	Date	Drawer	Muutos

VALLOX

Target Customer Addr. 1 Addr. 2		DESCRIPTION AND CONNECTION Vallox X-Line PTX, PTXP, PTXPA			
Drawer Person1	Designer Person1	Project number 001	Date DATE	Revision ...	Page 01 / 01