Metalux

Cruze ST 22CZ2

2' x 2' LED Specification Grade Troffer

Typical Applications

Office • Education • Healthcare • Hospitality • Retail
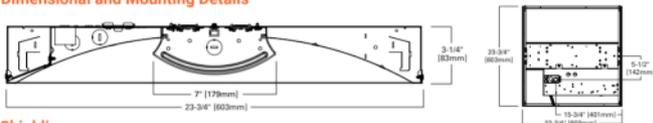
Interactive Menu

Product Certification

UL CERTIFIED · DLC LISTED · DLC ULTRA LISTED · T24 Efficiency Standards · RoHS · IC RATED · Listed

Product Features

WaveLinx LITE · WaveLinx PRO · damp location · VividTune · BioUp Melanopic Lighting

LINEAR DISCONNECT · MWS Modular Wiring System CLICK HERE · QS Quick Ship · BAA

Top Product Features

- Latch-less design provides clean architectural look
- BioUp melanopic lighting options for 30% circadian boost and earn WELL Building Standard points
- VividTune CCT tuning options from 3000K-5000K or 2700K-6500K
- Designers delight - ribbed, smooth and round perforated lens options
- High performance efficacy up to 151 lm/W
- Integrated sensor systems - occupancy, daylight and IoT connectivity
- Options to meet Buy American and other domestic preference requirements

Dimensional and Mounting Details

3-1/4" [83mm]
7" [179mm]
23-3/4" [603mm]

23-3/4" [603mm]
5-1/2" [142mm]
15-3/4" [401mm]
23-3/4" [603mm]

Shielding

HRP - High-Efficiency Round Perf Inlay

SQR - Square Ribbed Frosted Acrylic Lens

See ordering information for more shielding options.

Ceiling Compatibility

G Grid/Lay-In Standard	G Concealed T	G Slot Grid	Ceiling Type	Trim Type
			Exposed Grid	Standard
			Concealed T	Standard
			Slot Grid	Standard
			Flange	*

*See Drywall Frame Kit Accessory in Ordering Information Section