

Project		Catalog #		Type	
Prepared by		Notes		Date	




Interactive Menu

- Ordering Information page 2
- Mounting Details page 3, 4
- Optical Configurations page 5
- Product Specifications page 5
- Energy and Performance Data page 6, 7
- Control Options page 8

Quick Facts

- Lumen packages range from 4,800 - 84,000 lumens (35W - 588W)
- Replaces 70W up to 1,000W HID equivalents
- Efficacies up to 160 lumens per watt
- Energy and maintenance savings up to 85% versus HID solutions
- Standard universal quick mount arm with universal drill pattern

Dimensional Details

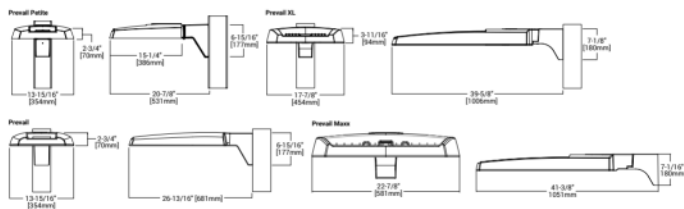

NOTES:

1. Visit <http://www.cooperlighting.com/specs/> to confirm qualification. Not all product variations are DLC qualified.
2. IBA Certified for 1000K CCT and warmer only.

Lumark

Prevail LED

Area / Site Luminaire

Product Features



Product Certifications



Connected Systems

- WaveLinX PRO Wireless
- WaveLinX LITE Wireless