

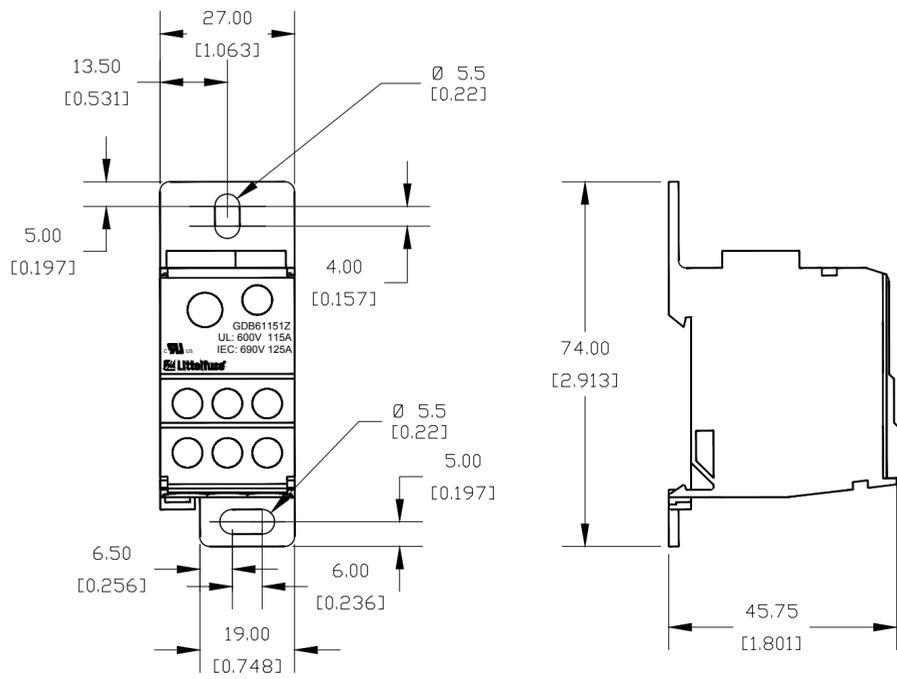

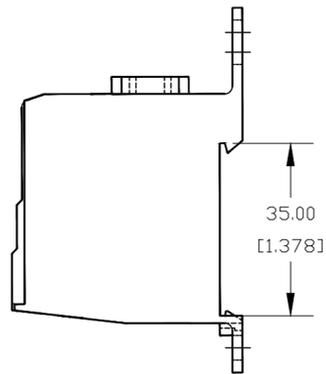

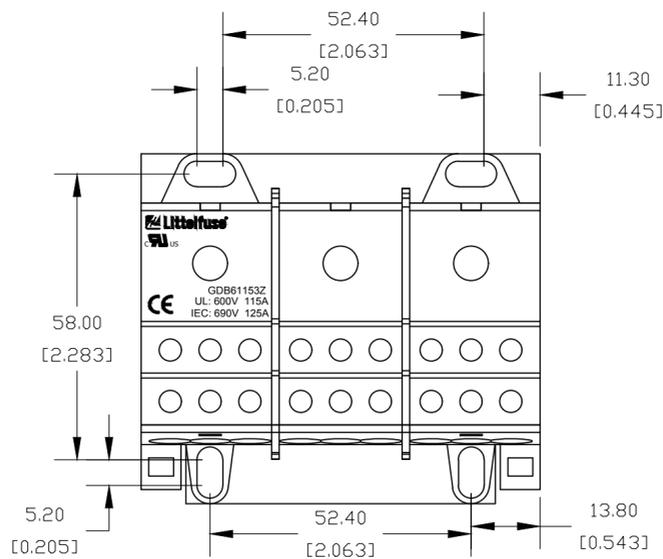
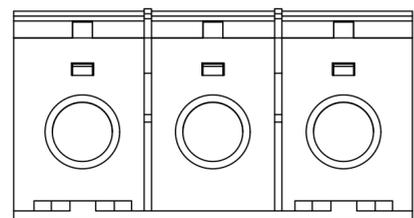


PART NO.	GDB61151Z
	GDB61151Z
	GDB61153Z

GDB61151Z

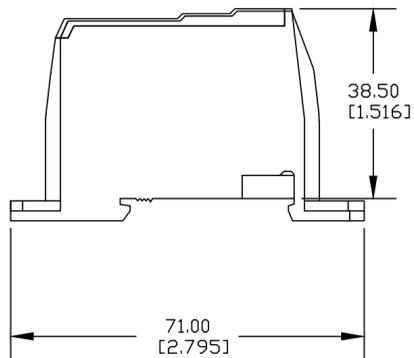

GDB61153Z

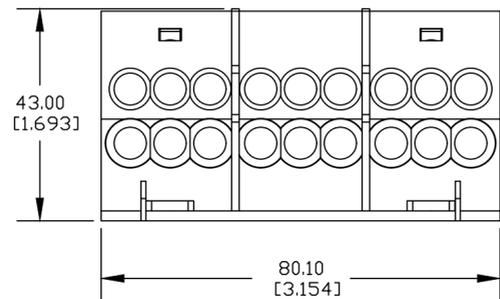

LTR	DATE	REVISION	CHK	APD
A	4/17/18	519180GCP - RELEASE MRY		

- NOTES:
1. AGENCY INFORMATION:
UL FILE NO. E309688
 2. MATERIALS:
INSULATOR-THERMOPLASTIC
CONNECTOR-BRASS
 3. TERMINATION:
1-POLE:
LINE: (1) 2-8 AWG
(1) 6-10 AWG
LOAD: 4-14 AWG

3-POLE:
LINE: 2-8 AWG
LOAD: 4-14 AWG
 4. RATINGS:
600V
MAXIMUM AMP PER POLE- 115A
 5. TORQUE:
LINE: 31 IN-LB
LOAD: 17.5 IN-LB

UNLESS OTHERWISE SPECIFIED, DIMENSIONS DO NOT INCLUDE PLATING.			
●	DENOTES CRITICAL CHARACTERISTICS.		
CPK	DENOTES CPK DIMENSIONS,-MINIMUM CPK VALUE		
(ST)	DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS.		
CP	DENOTES CP DIMENSIONS,-MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE.		
COPIES TO			
1	9	18	
2	10	19	FINISH
3	12	20	
4	13	21	DRW M YORK DATE 4/9/18 SCALE
5	14	23	CHK DATE SUPER DR
6	15	33	APPD DATE RAW STK WT
7	16	43	
8	17	53	LBS/M
TITLE			
GDB6115 SERIES DISTRIBUTION BLOCK OUTLINE			
Littelfuse® CHICAGO, ILLINOIS 60631		REVISION A	DRWG. NO. DL-GDB6115
		FINAL	

CAD GENERATED DRAWING - NO PENCIL CHANGES ALLOWED