



STEALTH Sensor with 110° view. Double Look Down lens, surge protection, LED detection indicator and Color Matched Lens.

Color: Bronze Weight: 0.9 lbs

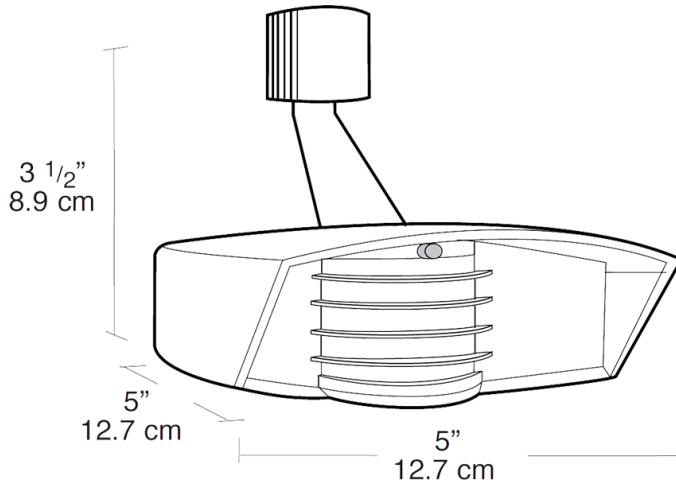
Project:	Type:
Prepared By:	Date:

Technical Specifications

- Compliance**
UL Listed:
Suitable for wet locations
- Electrical**
Power Consumption:
1W
- Surge Protection:**
Withstands up to 6000 volts
- Wall Switch Manual Override:**
Two flip logic prevents activation by momentary power outages. Override resets to auto at dawn. No extra wiring needed.
- RF Immunity:**
Circuits fully shielded for maximum radio frequency immunity
- Voltage:**
120V AC 60 Hertz
- Switching Capacity:**
1000W incandescent @ 120 volts, 8 amps
- Sensor Settings**
Time Adjustment:
5 seconds to 12 minutes

- Wide Sensitivity Control:**
Adjustable from 100% to 30%
- Advanced Detection Logic:**
Minimizes false triggers
- Photoelectric Control:**
Deactivates lights during daylight.
- Detection:**
Angle of view = 110°
Recommended Mounting Height = 10'-0"
Maximum Recommended Look-Out Zone = 50'-0"
- Construction**
Temperature Compensation:
Sensitivity adjusts automatically for consistent detection in hot and cold ambient temperatures
- Horizontal Lock, No-tool Joints:**
Keeps sensing pattern level for fast, error-free installation
- Floodlights:**
Precision die cast aluminum. 1/2" NPS threaded arm with serrated locking swivel fits all standard mounting boxes and covers.

- LED Characteristics**
LED Detection Indicator:
Shows when sensor is detecting in daytime and glows red at night for "on-guard" deterrence
- Color Matched Lens:**
Dark lens with bronze units, white lens with white units
- Other**
Warranty:
10-year sensor warranty

Dimensions**Features**

- Temperature compensation
- Radio frequency immunity
- 6000 volt surge protection
- LED detection & "on guard" indicator
- Color matched vandal resistant lens and grill
- Protected manual override with auto reset
- Can be wired in parallel