
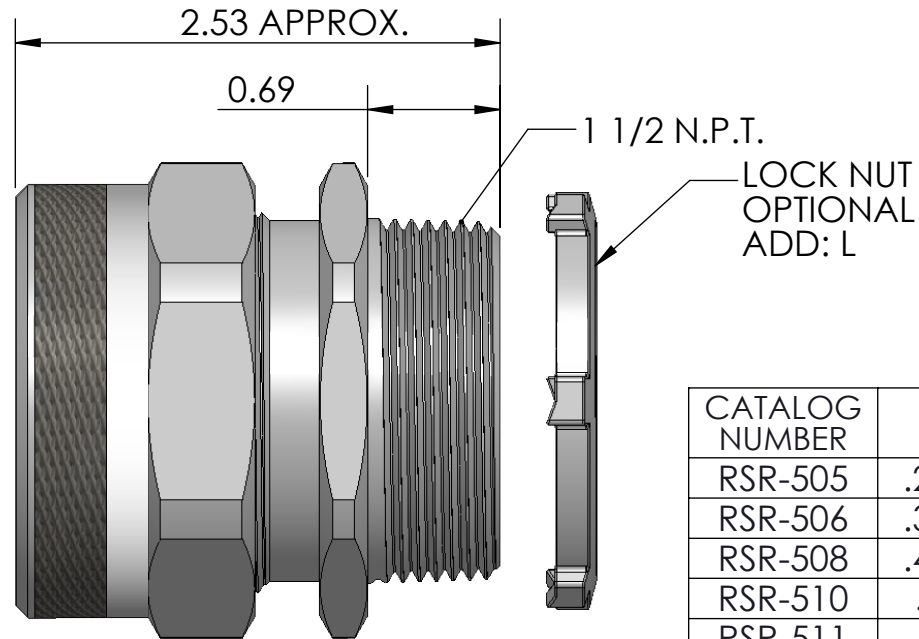


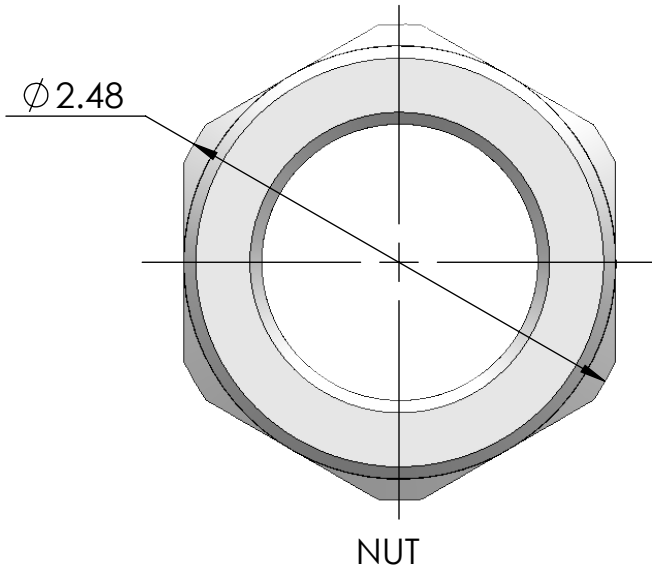

CATALOG NUMBER	SEALING RANGE	BODY BORE
RSR-505	.250 - .312	1.320
RSR-506	.312 - .375	1.320
RSR-508	.438 - .500	1.320
RSR-510	.500 - .626	1.320
RSR-511	.562 - .687	1.320
RSR-512	.625 - .750	1.320
RSR-513	.688 - .812	1.320
RSR-414	.750 - .875	1.320
RSR-515	.812 - .937	1.320
RSR-516	.875 - 1.000	1.320
RSR-517	.937 - 1.062	1.320
RSR-518	1.000 - 1.125	1.320
RSR-519	1.062 - 1.187	1.320
RSR-520	1.125 - 1.250	1.320
RSR-522	1.250 - 1.375	1.320
RSR-523	1.375 - 1.450	1.320

ITEM NO.	PART NUMBER	DESCRIPTION	MATERIAL	Default/QTY.
1	RSR-500-B	BODY	ALUMINUM	1
2	SRB-514 or -516	BUSHING	NEOPRENE	1
3	RSR-500-N	NUT	ALUMINUM	1
4	LN-150	LOCK NUT	ADD: L, C.R.S. ZINC PLATED	1

REV.	DATE	CHANGE	UNLESS OTHERWISE SPECIFIED:	NAME	DATE		
A	4/22/13	DRAWING RELEASED	DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL $\pm 1/64$ ANGULAR: MACH $\pm 1^\circ$ BEND $\pm 1^\circ$ ONE PLACE DECIMAL $\pm .015$ TWO PLACE DECIMAL $\pm .010$ THREE PLACE DECIMAL $\pm .005$	DRAWN JCN	4/13		
			INTERPRET GEOMETRIC TOLERANCING PER:	CHECKED		TITLE: RSR-500 SERIES	
			MATERIAL ALUMINUM	ENG APPR.			
			FINISH	MFG APPR.		SIZE A DWG. NO. RSR-500 ASSEMBLY	
			DO NOT SCALE DRAWING	Q.A.			
				PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF REMKE INDUSTRIES. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF REMKE INDUSTRIES IS PROHIBITED.		SCALE: 1:1	SHEET 1 OF 1