



Residential Product Guide

Table of Contents

Hubbell tradeSELECT® and netSELECT® Products for Your Home..... 2

Enhanced Home Products..... 4

Standard and Decorator Switches..... 6

Sensors, Dimmers and Timers..... 7

Tamper-Resistant Receptacles..... 8

Power Outlets and Specialty Receptacles..... 9

GFCI/AFCI Receptacles..... 10

USB Charging Receptacles..... 11

Surge Protective Devices..... 11

Power Delivery Systems..... 12

Structured Wiring..... 14

Network Modules..... 15

Entertainment Systems..... 16

Voice/Data Connections..... 17

Wallplates..... 18

Weather Resistant Covers..... 19

Electric Vehicle Charging Station..... 20

Hubbell tradeSELECT® and netSELECT®

Select the best when it comes to electrical devices and voice/data products. Choose Hubbell for the superior performance, innovation and style your home deserves.

Energy Savings Like Never Before

Energy efficiency isn't just good for the environment – it's good for homeowners, too. Occupancy sensors and timers offer real energy savings so you can enjoy significant long-term, ongoing reductions in electric bills. Hubbell offers a range of options for controlling residential energy use. Sensors turn lights on when you need them, and automatically turn them off when you leave the room. Digital timers provide economic lighting and fan control with just the touch of a finger. LED-compatible dimmers allow you to control lighting levels, offering just the right atmosphere with comfort and convenience.



DT5030W



RDVCL153PW




WS2000W



Products for Your Home

Safety with Styling

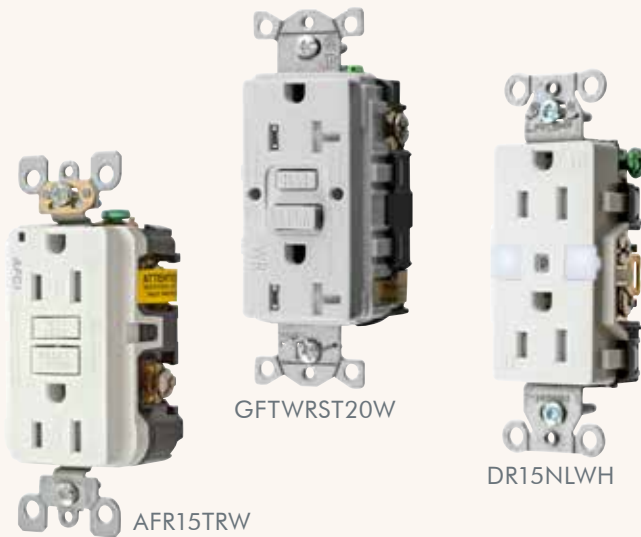When you think safety, think Hubbell. Our range of products makes a difference. GFCI and AFCI receptacles provide the best in people and fire protection, minimizing worry about shocks and electrical fires. Tamper-resistant receptacles reduce the risk of injury by preventing foreign objects from making electrical contact. New nightlight switches and receptacles provide a guiding light, with energy efficiency. But putting safety first doesn't mean that aesthetics should be ignored. To align with residential décor, Hubbell wiring devices are offered in a full range of designs that blend beautifully with furnishings and finishes.



Technology and the Interconnected World

To accommodate advanced electronic devices, homes need to be wired for the ever-changing pace of technology. Not only should wiring systems complement aesthetics, but they should also be efficient, reliable, and safe in order to support computers, televisions, and security systems. From network enclosures to USB charging outlets, Hubbell has a broad line of products that are specifically designed to support the connectivity and power needs of homeowners.



Enhanced Home Products



Decorator Night Lights

Night light switches and receptacles help light the way. Put light where safety is a concern for seniors and children: in the bedroom, along the hallway, and in the bathroom.



Countertop Pop Up Receptacles

Because spills happen. These pop up receptacles fit perfectly into the kitchen island. Pop-up receptacles provide power and are designed for use in compliance with NEC 406.5. UL tested and water resistant to a half gallon spill.



Occupancy Sensors

Saving energy has never been so easy. Have the lights turn on automatically when you are there and turn off when you're not. Excellent for the laundry, bathroom and walkthrough areas, basements and attics. Available in automatic and vacancy options, with time adjustments.



netSelect® Structured Wiring

Use structured wiring cabinets and modules to locate and terminate all of your service provider and data connections. This network solution secures your voice/data and entertainment systems in one location. A modular approach makes it easy to upgrade, and keep pace with evolving technologies.





USB Chargers and Surge Protective Devices

Conveniently charge portable electronics with combination USB chargers and power outlets. Perfect for the home office, these receptacles have standard electrical power along with high power 5 Amp USB ports for the maximum in charging capacity. Surge devices manage power quality and help protect electronics. Receptacles give you point of use protection, while panel protection is specifically designed to catch incoming power spikes from outside the home.



Floor Boxes

Residential floor box receptacles offer a solution to bring power where you need it. In large rooms, access to power may be needed in the center for lighting, entertainment systems, and everyday portable power for laptops and tablets. Floor boxes are the answer. Available in multiple finishes in metal and plastic to blend in to any design.



GFCI

GFCIs are people protection, eliminating power when there is a non-typical path to ground. Anywhere there is water, GFCI protection is recommended. Add a level of safety where people, power and water meet.



Flat Panel TV

Flat panel television enclosures deliver high-density connectivity for power in the wall. Allows for flat panel displays to sit flush against the wall with no dangling cords. Compatible with a wide variety of TV mounts, the entire system enables high-density cables to fit in the smallest footprint possible.



Standard and Decorator Switches

Decorator switches provide a sleek and appealing look. They are the perfect finishing touch to complement any interior. Easy to use, simply press the rocker. Night light switches help light the way. Increase security and safety to see where you are going.



Decorator Quiet Rocker Switches

Description	Single Pole	Single Pole, Illuminated	Single Pole with Nightlight	Three Way	Three Way, Illuminated	Four Way
Termination	Self-Grounding, Push, Back and Side Wire	Self-Grounding, Push, Back and Side Wire	Self-Grounding, Push, Back and Side Wire	Self-Grounding, Push, Back and Side Wire	Self-Grounding, Push, Back and Side Wire	Self-Grounding, Back and Side Wire
Rating	15A 120-277V AC	15A 120V AC	20A 120V AC	15A 120-277V AC	15A 120V AC	15A 120-277V AC
Black	RSD115BK	—	DS120NLBK**	RSD315BK	—	RSD415BK
Brown	RSD115	—	DS120NLBR**	RSD315	—	RSD415
Ivory	RSD115I	RSD115ILI*	DS120NLIV**	RSD315I	RSD315ILI*	RSD415I
Light Almond	RSD115LA	RSD115ILLA*	DS120NLLA**	RSD315LA	RSD315ILLA*	RSD415LA
White	RSD115W	RSD115ILW*	DS120NLWH**	RSD315W	RSD315ILW*	RSD415W

Note: *Light glows through the top portion of the rocker when switch is in the OFF position. Does not require a neutral wire.
 **Light glows through the top portion of the rocker when switch is in the OFF position. Requires a neutral wire.



Combination Quiet Rocker Devices

Description	Three (3) Single Pole Switches	Two (2) Single Pole Switches	Single Pole and Three Way Switch	Single Pole Switch, Tamper-Resistant, Receptacle	Two (2) Three Way Switches	Three Way Switch, Tamper-Resistant, Receptacle
Termination	Self-Grounding, Side Wire	Self-Grounding, Side Wire	Self-Grounding, Side Wire	Self-Grounding, Side Wire	Self-Grounding, Side Wire	Self-Grounding, Side Wire
Rating	15A 120-277V AC	15A 120-277V AC	15A 120-277V AC	15A 120V (switch) 15A 125V (recept.)	15A 120-277V AC	15A 120V (switch) 15A 125V (recept.)
Black	—	RCD101BK	RCD103BK	RCD108BKTR	RCD303BK	RCD308BKTR
Ivory	RCD111I	RCD101I	RCD103I	RCD108ITR	RCD303I	RCD308ITR
Light Almond	RCD111LA	RCD101LA	RCD103LA	RCD108LATR	RCD303LA	RCD308LATR
White	RCD111W	RCD101W	RCD103W	RCD108WTR	RCD303W	RCD308WTR



Toggle Switches

Description	Single Pole	Three Way	Four Way
Termination	Grounding, Push and Side Wire	Grounding, Push and Side Wire	Self-Grounding, Side Wire
Rating	15A 120V AC	15A 120V AC	15A 120V AC
Brown	RS115	RS315	RS415
Ivory	RS115I	RS315I	RS415I
Light Almond	RS115LA	RS315LA	RS415LA
White	RS115W	RS315W	RS415W



Combination Toggle Switches and Devices

Description	Two (2) Single Pole Switches	Single Pole Switch, Tamper-Resistant Receptacle	Single Pole and Three Way Switch
Termination	Self-Grounding, Side Wire	Self-Grounding, Side Wire	Self-Grounding, Side Wire
Rating	15A 120V AC	15A 120V (switch) 15A 125V (recept.)	15A 120V AC
Brown	RC101	RC108TR	RC103
Ivory	RC101I	RC108ITR	RC103I
Light Almond	RC101LA	RC108LATR	RC103LA
White	RC101W	RC108WTR	RC103W

Note: *Neutral required for pilot light.

Sensors, Dimmers and Timers

Saving energy has never been so easy. Sensors control the lights automatically. Occupancy sensors are designed to turn on when you are there, and off when you're not. All are adjustable for delayed off. Vacancy sensors are turned on like an ordinary switch, but automatically turn lights off.



Passive Infrared Occupancy Sensors

Description	Color	Standard	Description	Color	Standard
Auto-ON/auto-OFF operation; 120/277V AC; 3-way capable	Ivory	WS2000I	Auto-ON/auto-OFF; two circuits; 120V AC only	Ivory	WS1020I
	Light Almond	WS2000LA		Light Almond	WS1020LA
	White	WS2000W		White	WS1020W
Auto-ON/auto-OFF operation; 120V AC only	Ivory	WS1000I	Manual-ON/auto-OFF; two circuits; 120V AC only	Ivory	WS1021I
	Light Almond	WS1000LA		Light Almond	WS1021LA
	White	WS1000W		White	WS1021W
Manual-ON/auto-OFF operation; 120V AC only	Ivory	WS1001I			
	White	WS1001W			

Dimmers manage the precise amount of light, so you use exactly what you need. Developed for all types of home lamp loads: incandescent, compact fluorescent or LED. One dimmer does it all.



CFL/LED Dimmers

Description	Rocker Dimmer	Toggle Dimmer
Rating	Inc/Halo 600W, CFL/LED 150W, 120V AC, 60Hz	Inc/Halo 600W, CFL/LED 150W, 120V AC, 60Hz
Termination	Single Pole/Three Way	Single Pole/Three Way
Ivory	RDVCL153PI	RAYCL153PI
Light Almond	RDVCL153PLA	RAYCL153PLA
White	RDVCL153PW	RAYCL153PW



3 Speed Fan Speed Controls

Description	Rocker Slide Adjustment	Toggle 3-Speed
Rating	1.5A 120V AC	1.5A 120V AC
Termination	Single Pole/Three Way	Single Pole/Three Way
Ivory	RDVFSQFI	RAYFSQFI
Light Almond	RDVFSQFLA	RAYFSQFLA
White	RDVFSQFW	RAYFSQFW



Count Down Timer Wall Switch

1000W @ 120V AC and 1400W @ 277V AC; 1/6hp

Description	Color	Catalog Number
30 Minutes: OFF, 5, 10, 20, 30	Ivory	DT5030I
	Light Almond	DT5030LA
	White	DT5030W
60 Minutes: OFF, 15, 30, 45, 60	Ivory	DT5060I
	Light Almond	DT5060LA
	White	DT5060W
12 Hours: OFF, 2, 4, 8, 12	Ivory	DT5012I
	Light Almond	DT5012LA
	White	DT5012W

Note: Neutral required.



Digital Timer Wall Switch

960W @ 120V AC and 1200W @ 277V AC; 1/6hp

Description	Color	Catalog Number
Dip switch enabled preset intervals. User adjustable 1 min up to 4 hours, 3-way capable. Includes an ON/OFF momentary push button switch feature.	White	DT2000W

Note: Neutral required.

Tamper-Resistant Receptacles

Put power where you need it, in style with Decorator receptacles. The same quality and performance as standard devices, but with a contemporary style. Tamper resistant devices prevent accidental insertion of a signal item, like pins and keys to help keep children safe. The Tamper Resistant mechanism is cam action for smooth insertion of plugs, like it is not even there.

Decorator Duplex Receptacles, 2 Pole, 3 Wire



Description	Weather and Tamper-Resistant	Tamper-Resistant	Nightlight Receptacle
Termination	Self-Grounding, Push and Side Wire	Self-Grounding, Push and Side Wire	Nightlight 0.5 Lumen Back and Side Wire
Rating	15A 125V NEMA 5-15R	15A 125V NEMA 5-15R	15A 125V NEMA 5-15R
Black	RRD15SBKWRTR	RRD15SBKTR	—
Brown	RRD15SWRTR	RRD15STR	—
Gray	RRD15SGYWRTR	RRD15SGYTR	—
Ivory	RRD15SIWRTR	RRD15SITR	DR15NLIV
Light Almond	RRD15SLAWRTR	RRD15SLATR	DR15NLLA
White	RRD15SWWRTR	RRD15SWTR	DR15NLWH

Decorator Single Receptacles, 2 Pole, 3 Wire



Description	Tamper-Resistant	Tamper-Resistant	Standard
Termination	Self-Grounding, Side Wire	Self-Grounding, Side Wire	Self-Grounding, Side Wire
Rating	20A 125V NEMA 5-15R	20A 125V NEMA 5-20R	20A 250V NEMA 6-20R
Black	RRD151BKTR	RRD201BKTR	RRD205BK
Brown	RRD151TR	RRD201TR	RRD205
Gray	RRD151GYTR	RRD201GYTR	RRD205GY
Ivory	RRD151ITR	RRD201ITR	RRD205I
Light Almond	RRD151LATR	RRD201LATR	RRD205LA
White	RRD151WTR	RRD201WTR	RRD205W

The XClamp eliminates the need to loop the wire. Best solution for either 15 or 20 Amp branch circuits.



XClamp Duplex Receptacles

Description	Color	Catalog Number
Tamper-Resistant, 15A 125V, 2 Pole, 3 Wire Grounding, 20A Circuit Rated	Ivory Light Almond White	RR15SITRX RR15SLATRX RR15SWTRX

Fast & Secure Terminations with XCLAMP

- 1 Strip the wire
- 2 Insert the wire
- 3 Clamp the connection



Duplex Receptacles, 2 Pole, 3 Wire



Description	Weather and Tamper-Resistant	Tamper-Resistant
Termination	Self-Grounding, Push and Side Wire	Self-Grounding, Push and Side Wire
Rating	15A 125V NEMA 5-15R	15A 125V NEMA 5-15R
Brown	RR15SWRTR	RR15STR
Gray	RR15SGYWRTR	—
Ivory	RR15SIWRTR	RR15SITR
Light Almond	RR15SLAWRTR	RR15SLATR
White	RR15SWWRTR	RR15SWTR

Single Receptacles, 2 Pole, 3 Wire





Description	Weather and Tamper-Resistant	Tamper-Resistant	Weather and Tamper-Resistant	Tamper-Resistant
Termination	Self-Grounding, Side Wire	Self-Grounding, Side Wire	Self-Grounding, Side Wire	Self-Grounding, Side Wire
Rating	15A 125V NEMA 5-15R	15A 125V NEMA 5-15R	20A 125V NEMA 5-20R	20A 125V NEMA 5-20R
Brown	RR151WRTR	RR151TR	RR201WRTR	RR201TR
Gray	RR151GYWRTR	RR151GYTR	RR201GYWRTR	RR201GYTR
Ivory	RR151IWRTR	RR151ITR	RR201IWRTR	RR201ITR
Light Almond	RR151LAWRTR	RR151LATR	RR201LAWRTR	RR201LATR
White	RR151WWRTR	RR151WTR	RR201WWRTR	RR201WTR

Power Outlets and Specialty Receptacles

More power, better performance for appliances and heavy duty connections.




Range and Dryer Power Receptacles

	Description	Color	Cat. Number	Description	Color	Cat. Number
	Flush Mount for 1- or 2-Gang Box; 30A 125/250V 3 Pole, 4 Wire with Ground	Black White	RR430F RR430FW	Surface Mount; 30A 125/250V 3 Pole, 4 Wire with Ground	Black	RR430
	Flush Mount for 1- or 2-Gang Box; 50A 125/250V 3 Pole, 4 Wire with Ground	Black White	RR450F RR450FW	Surface Mount; 50A 125/250V 3 Pole, 4 Wire with Ground	Black	RR450

Recessed receptacles allow you to mount TVs flush or push furniture up against the wall without having to worry about the plug getting damaged or dislodged.





Recessed Receptacles

	Description	Color	Cat. Number	Description	Color	Cat. Number
	Recessed Duplex Receptacle, Tamper-Resistant, 2 pole, 3 wire, grounding, side wire terminations	Ivory Light Almond White	RR1510I RR1510LA RR1510W	Recessed Duplex Receptacle, Tamper-Resistant, 2 pole, 3 wire, grounding, side wire terminations	Ivory Light Almond White	RR1510I RR1510LA RR1510W

JLOAD is the most compact combination "power/Audio/Video device" available, in the smallest footprint.



JLOAD® Multimedia Products

	Description	Color	Cat. Number	Description	Material	Cat. Number
	JLOAD® Multimedia Outlet, Provides power, Cat. 5e and coaxial in a single gang box. Requires RJ600 Box. Includes decorator frame, one Cat. 5e, one F-connector and one power receptacle 125V with voltage dividers.*	Black Ivory Light Almond White	RJ650BKTR RJ650ITR RJ650LATR RJ650WTR	JLOAD® Multimedia Box, 3" deep with seven ½-inch knockouts, non-metallic sheathed cable clamps on each side. Screw in mounting to stud.	Steel	RJ600
		Black Ivory Light Almond White	RJ620BKTR RJ620ITR RJ620LATR RJ620WTR			



Note: *Dividers provided for use with the RJ600, RF515 series and RU200 series boxes. RF408 required for use with the RF400 series floor boxes.

GFCI/AFCI Receptacles

Safety plus more. Tamper resistant and self-testing for the utmost in protection. GFCIs are people protection, eliminating power when there is an unintended path to ground, like when a person touches power. Required in most areas of the home where water may be present.





GFCI Receptacles

Rating	Color	Standard	Night Light Two LED Night Lights	Combination Switch 15A 120V Switch	Weather and Tamper-Resistant
 15A 125V NEMA 5-15R UL CSA 0.5 HP	Black	GFTRST15BK	GFTRST15BKNL	—	GFTWRST15BK
	Brown	GFTRST15	GFTRST15NL	—	GFTWRST15
	Ivory	GFTRST15I	GFTRST15INL	GFSPST15I	GFTWRST15I
	Light Almond	GFTRST15LA	GFTRST15LANL	GFSPST15LA	GFTWRST15LA
	White	GFTRST15W	GFTRST15WNL	GFSPST15W	GFTWRST15W
 20A 125V NEMA 5-20R UL CSA 1 HP	Black	GFTRST20BK	GFTRST20BKNL	—	GFTWRST20BK
	Brown	GFTRST20	GFTRST20NL	—	GFTWRST20
	Ivory	GFTRST20I	GFTRST20INL	—	GFTWRST20I
	Light Almond	GFTRST20LA	GFTRST20LANL	—	GFTWRST20LA
	White	GFTRST20W	GFTRST20WNL	—	GFTWRST20W

AFCIs help protect against fire, eliminating power when it senses an arcing, occurring when there is a damaged wire or cord set inserted into the outlet. Easily added to most living areas and bedrooms in the home for added protection.





Dual Function AFCI/GFCI Receptacles

Rating	Color	Standard	Rating	Color	Standard
 15A 125V NEMA 5-15R UL CSA 0.5 HP	Black	AFGF15TRBK	 20A 125V NEMA 5-20R UL CSA 1 HP	Black	AFGF20TRBK
	Brown	AFGF15TR		Brown	AFGF20TR
	Ivory	AFGF15TRI		Ivory	AFGF20TRI
	Light Almond	AFGF15TRLA		Light Almond	AFGF20TRLA
	White	AFGF15TRW		White	AFGF20TRW

Required by the NEC in specific rooms in the home, these are great for new construction as well a renovation to add more safety and protection.



Arc Fault AFCI Receptacles

Rating	Color	Standard	Rating	Color	Standard
 15A 125V NEMA 5-15R UL CSA 0.5 HP	Black	AFR15TRBK	 20A 125V NEMA 5-20R UL CSA 1 HP	Black	AFR20TRBK
	Brown	AFR15TR		Brown	AFR20TR
	Ivory	AFR15TRI		Ivory	AFR20TRI
	Light Almond	AFR15TRLA		Light Almond	AFR20TRLA
	White	AFR15TRW		White	AFR20TRW

USB Charging Receptacles

USBs give you more ways to charge your portable electronics. High power output - 5 Amps, the USB ports are capable of charging two devices simultaneously.



USB Charger Type-C

Description	Color	15A 125V	20A 125V
USB Charger Outlet: two Type-C port configurations, high power 5 Amp, 5 Volt DC output, USB ports rated 10,000 cycles	Black	USB15C5BK	USB20C5BK
	Brown	USB15C5	USB20C5
	Ivory	USB15C5I	USB20C5I
	Light Almond	USB15C5LA	USB20C5LA
	White	USB15C5W	USB20C5W



USB Charger Combination Type A&C

Description	Color	15A 125V	20A 125V
USB Charger Outlet: one Type A and one Type-C port configuration, high power 5 Amp, 5 Volt DC output, USB ports rated 10,000 cycles	Black	USB15AC5BK	USB20AC5BK
	Brown	USB15AC5	USB20AC5
	Ivory	USB15AC5I	USB20AC5I
	Light Almond	USB15AC5LA	USB20AC5LA
	White	USB15AC5W	USB20AC5W



Specialty USB Receptacles

Description	Color	Catalog Number	Description	Color	Catalog Number
Switch Combo Outlet, two USB Type A ports, 2.1 Amp, 5 Volt DC, Style Line® decorator	Black	USB102BK	USB Charger 4 Port Outlet, four USB Type A ports, 5 Amp, 5 Volt DC, Style Line® decorator	Black	USB4BK
	Brown	USB102		Brown	USB4
	Ivory	USB102I		Ivory	USB4I
	Light Almond	USB102LA		Light Almond	USB4LA
	White	USB102W		White	USB4W



Compatible with USB1.1/2.0/3.0 devices in accordance with the battery charging spec for all phones and tablets.

Surge Protective Devices

Surge devices manage power quality and help protect electronics. Receptacles give you point of use protection, while panel protection is specifically designed to catch incoming power variations from outside the home.



Wired-In High Quality Surge Protective Device (Type 1 SPD)

Service Voltage V AC	Configuration	Catalog Number
120/240 Single Phase;	1Ph., 3-wire + G	HBL3W50

Circuit Guard® Duplex Receptacles


Specification Grade; 240 Joules, 15kA Peak Current			
Description	Surge protection receptacle with light	Surge with light and alarm	Isolated ground, surge with light and alarm
Ivory	HBL5260ISA	HBL5262ISA	IG5262ISA
White	HBL5260WSA	HBL5262WSA	IG5262WSA



Power Delivery Systems

Power where you need it, when you want it.

Residential floor box receptacles offer an economical solution to bring power where you need it. Available in configurations for either slab on grade or wood subflooring, they come in multiple finishes to blend in.



Floor Boxes for Structural Wood Floors Mounts to Subfloor or Joists

Description	Finish	Catalog No.	Finish	Catalog No.	Finish	Catalog No.
Decorator duplex floor box kit; steel box, flange and door assembly 15A 125V receptacle	Solid Brass	RF515BR	Black Paint	RF515BK	Chrome Plated	RF515CH
	Stainless Paint	RF515SS	Chestnut Brown Paint	RF515BN	Copper Plated	RF515CU
	Almond Paint	RF515AL	Brass Plated	RF515BP	Nickel Plated	RF515NI



Floor Boxes for Concrete Floors

Description	Rating	Finish	Catalog Number	Finish	Catalog Number
Flange and Hinged Door Cover Assembly. Includes tamper-resistant duplex receptacle	15A 125V NEMA 5-15R	Brushed Aluminum	RF406ALU	Almond Nylon	RF406AL
		Brushed Brass Plated	RF406BP	Black Nylon	RF406BK
		Solid Brass	RF406BR	Brown Nylon	RF406BN
				Gray Nylon	RF406GY

PVC Floor Box Includes round box Max 6-inch (4 $\frac{7}{8}$ in. diameter x 6.0 in. deep), four reducers, closure plugs, and concrete cover with locator flag.

SystemOne Fully Adjustable 4 inch Recessed Floor Box for Concrete Floors



Description	Catalog Number
Non-Metallic floor box; requires adjustable mounting cup, sold separately.	CFBS1R4PFB

SystemOne 4 inch Recessed Floor Box for Wood Floors



Description	Catalog Number
Floor Box	AFBS1R4BASE

Adjustable Mounting Cup required for CFBS1R4 Series



Description	Catalog Number
Adjustable mounting cup for 4 inch floor boxes; floor boxes purchased independently from cup	CFBS1R4CUP

Architectural Covers



Description	Finish	Catalog Number
Cover for use with AFBS1R4 Series with egress door	Brushed Aluminum	AFBS1R4CVRALU
	Black Powder Coat	AFBS1R4CVRBLK
Cover for use with CFBS1R4 Series with egress door	Brushed Aluminum	CFBS1R4CVRALU
	Black Powder Coat	CFBS1R4CVRBLK

Note: Other finishes available. See full line catalog for details.

Device Mounting Plates

For use with CFBS1R4 and AFBS1R4 Series floor boxes

Sub-plate with (1) decorator opening and (2) jack openings



S1R4SP2X2STYLE

Sub-plate with (1) duplex opening and (2) jack openings



S1R4SP2X2DUPLEX

(4) single 20A receptacles



S1R4SPQUAD

Because spills happen. Pop-up receptacles provide a power source ideal for kitchen and bath counter tops. UL listed 498 Section 146, for use in compliance with NEC 406.5. UL tested and water resistant to a half gallon spill.



Countertop Receptacles

Description	Finish	Color/Material	Surface Mount	Flush Mount
15A 125V Tamper-Resistant Pop-Up Kitchen Counter Receptacle, Rated for 20A circuits Cover: machined aluminum, Wiring chamber accepts 1/2" MC or non-metallic sheath cable	Powder Coated	Black White	RCT200BK RCT200W	RCT201BK RCT201W
	Brushed	Aluminum Brass Nickel	RCT200ALU RCT200BR RCT200NI	RCT201ALU RCT201BR RCT201NI
	Polished	Chrome	RCT200CH	RCT201CH
	Matte	Bronze	RCT200BZE	RCT201BZE



Powder Coated
Black



Powder Coated
White



Brushed
Aluminum



Brushed
Brass



Brushed
Nickel



Polished
Chrome



Matte
Bronze

Desktop combination power and charging helps manage the home office. Ideal for work surfaces like desktops where computers and mobile electronics are used. The unit is supplied with a 5 foot cord and plug allowing it to be easily installed. Listed to UL962A for furniture power.

2X2 USB Work Surface Pop-Up Box

Description	Finish	Catalog Number
Equipped with a tamper-resistant duplex receptacle and two Type A USB charging ports; 15A 125 volt; 5" x 5" x 3.55" Max. surface thickness: 1.125"	Brushed Aluminum Black Powder Coat	WSBUSB2X2ALU WSBUSB2X2BLK



Sometimes the best place for an outlet is to hide it under a cabinet or shelf. These outlet boxes comply for kitchen placement above or below the counter surface. Accommodates GFCIs and decorator receptacles.



Under Cabinet/Counter Power Distribution

Description	Material	Slim Box	GFCI Fit Box
	Stainless Steel	RU100SS	RU200SS
	White Metal	RU100W	RU200W
	White Nylon	RU170W*	RU270W*

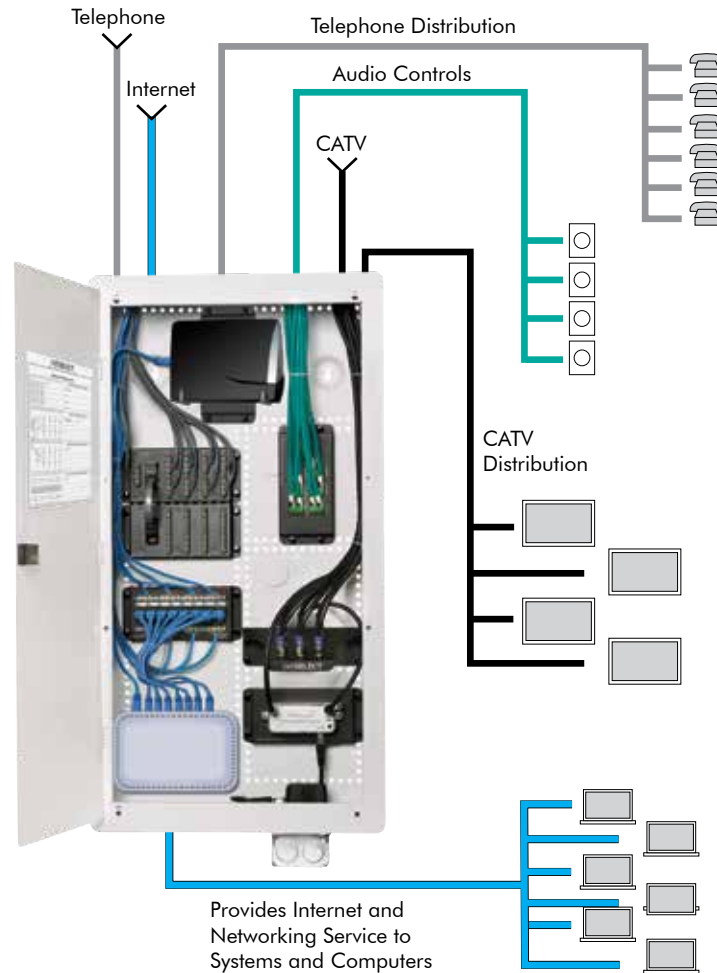
Note: *Steel box with nylon cover.



Structured Wiring

The network solution that satisfies the need for dependable and flexible management of your voice/ data and entertainment multimedia systems. This modular system makes it easy to upgrade, and keep pace with evolving technologies. Cabinets mount surface or recessed, between 16" studs. All are powder coated painted with 14 gauge steel for maximum impact resistance. Hinged cover can be mounted to swing from either side. Provisions to mount optional power outlets and lock kits.

Today's Communications Entail a Lot More Than Just Talking.
netSELECT® Keeps You Connected—Internet, Voice, Data and Entertainment



Network Enclosures

10 Inch Network Enclosure for MDU and Modular Applications

Description	Height	Width	Depth	Catalog Number
With hinged cover	11.55"	15.65"	4.08"	NSOBX10

14 Inch Network Enclosure

With hinged cover	15.55"	15.65"	4.08"	NSOBX14
-------------------	--------	--------	-------	----------------

28 Inch Network Enclosure

With hinged cover	29.55"	—	—	NSOBX28
2"D extension bracket with ventilation and WiFi KOs	29.3"	15.57"	2.00"	NSOBX28X2

48 Inch Network Enclosure

With hinged cover	48.94"	14.94"	4.07"	NSOBX48*
Trim ring				NSOBX48R

Note: *Door covers rough-in, no trim ring provided.



Network Modules

Modular components enable your design to match your performance requirements. Modules snap horizontally or vertically into the enclosures for optimum space management.

Combination Module



Description	Catalog Number
6-port telephone panel, 6-port coaxial splitter, and 6-port Category 5e panel; Provides voice, video, and data distribution in a space efficient package; perfect for use with NSOBOX10 and NS790xx plates to quickly establish a comprehensive home network.	NSOTVDM6

Primary Telephone Module



Description	Catalog Number
8-port phone outlets to manage up to (4) incoming lines for voice or accessory applications in a protected PCB module; RJ31X interface jack included for security system connection; RJ45 jack interfaces with optional NSOETM8 telephone expansion module for additional extensions.	NSOPTM8

Data Module



Description	Catalog Number
Category 5e data module, 8-port supports Gigabit Ethernet for up to (8) Category 5e data lines with front 110 punch-down terminations in a protected PCB module	NSODM8

6-Way Coaxial Splitter Module



Description	Catalog Number
1GHz, basic unit with one incoming line and six outgoing	NSOVM6

Fixed Video Amplifier Module



Description	Catalog Number
Provides 10dB video signal amplification for incoming cable feeds; Recommended for use when more than four outputs are installed; Provides 10dB forward path gain and supports current digital cable systems; Includes RG-59 cable jumper to connect amplifier to passive video splitter; 120 Volt rated	NSOVAMP

Blank Module Plate



Description	Catalog Number
Allows mounting of active components (i.e. switches, routers) or other devices onto a modular platform; can be custom drilled or used with two included self-adhesive VELCRO® strips	NSOBM

Multi-Provider Patchable Telecom Module



Description	Catalog Number
12-port telephone module distributes 4 incoming lines out to 12 locations through RJ-45 jacks; allows data lines to be converted to voice with the move of a patch cord; RJ31X interface jack is included for security system connection	NSOMTM12

Entertainment Systems

Flat panel television enclosures deliver high-density connectivity for power in the wall. Allows for flat panel displays to sit flush against the wall with no dangling cords. Compatible with a wide variety of TV mounts, the entire system enables high density cables to fit in the smallest footprint possible.



FPTV Connection Enclosures


Description	Color	Catalog Number
2-gang in-wall enclosure 8.16"x7.92"x3.37"	White	NSAV62M
4-gang in-wall enclosure 14.80"x7.92"x3.37"	White	NSAV124M
New work stud brackets		NSAV6NW

Accessories

Description	Surge protected power kit	1-port HDMI frame	2-port HDMI frame
Color	Blue	White	White
	NSOKPS	NS801W	NS802W



Description	HDMI snap fit	F-connector snap fit	Cat 5e snap fit jack	Cat 6 snap fit jack
Color	White	White	White	White
	SFHC14W	NSF70W	NSJ5EW	NSJ6W



Tamper-Resistant Recessed Receptacles



Description	Color	1-Gang	2-Gang with Feed-Through	2-Gang with Snap Fit
15A 125V Duplex Receptacle	Ivory Lt Almond White	RR1510I RR1510LA RR1510W	RR1512I RR1512LA RR1512W	RR1514I RR1514LA RR1514W

Two Gang AV Wallboxes



Description	Catalog Number
2-Gang box, metal 2" KO, 54 in ³ capacity; 4.21" x 4.06" x 4.00"	HBL985
Low Voltage AV Wallbox Partitions; Solid divider; Use with HBL985	HBL989

Wallbox



Description	Color	Catalog Number
2-Gang, nail-on box, thermoplastic	Blue	RR1500

HDMI Patch Cords, #24 AWG

HDMI Device Length	HDMI Patch Cords	Horizontal Cords Length (Connector to Connector)	Horizontal Cords
3 ft.	HDPC03BK	10 ft.	HDH10BK
6 ft.	HDPC06BK	15 ft.	HDH15BK
		20 ft.	HDH20BK
		25 ft.	HDH25BK
		30 ft.	HDH30BK

Note: Black and Non-Plenum only.

NSC Patch Cords

Color	Length	Category 5e	Category 6
Blue	1 ft.	NSC5EB01	NSC6B01
	3 ft.	NSC5EB03	NSC6B03
	5 ft.	NSC5EB05	NSC6B05
	7 ft.	NSC5EB07	NSC6B07
	10 ft.	NSC5EB10	NSC6B10
	15 ft.	NSC5EB15	NSC6B15

Note: Other colors available. See full line catalog for details.



Voice/Data Connections

Allows for the custom creation of multimedia outlets and workstations while maintaining a decorative look. Multimedia face plates offer a perfect match to electrical wallplates for a consistent finished look.



Molded-In Voice/Low-Speed Data

Description	Decorator Frame, One RJ11 Jack, 6-Position, 4-Conductor	Decorator Frame, Duplex RJ11 Jacks, 6-Position, 6-Conductor	Decorator Frame, Single F-Type Coupler Bulkhead, Female to Female	Decorator Frame, Duplex F-Type Coupler Bulkhead, Female to Female	Decorator Frame, One Cat. 5e One F-Type Coupler Bulkhead, Female to Female
Termination	Screw Terminations	Screw Terminations	Screw Terminations	Screw Terminations	110 Punch-Down
Color					
Ivory	NS770I	NS772I	NS780I	NS782I	NS785I
Light Almond	NS770LA	NS772LA	NS780LA	NS782LA	NS785LA
White	NS770W	NS772W	NS780W	NS782W	NS785W



Molded-In Plates for Voice and CATV/Satellite

Description	One F-Type One RJ11 Jack, 6-Position, 6-Conductor	One F-Type One RJ11 Jack, 6-Position, 4-Conductor	One F-Type Coupler Bulkhead, Female to Female	Duplex F-Type Coupler Bulkhead, Female to Female	One RJ11 Jack, 6-Position, 4-Conductor, Screw Terminations		
Color	Standard	Standard	Standard	Mid-Size	Standard	Standard	Mid-Size
Ivory	NS748I	NS747I	NS750I	NS751I	NS752I	NS730I	NS735I
Light Almond	NS748LA	NS747LA	NS750LA	NS751LA	NS752LA	NS730LA	NS735LA
White	NS748W	NS747W	NS750W	NS751W	NS752W	NS730W	NS735W



1-Gang Multimedia Wallplates

Color	1-Port	2-Port	3-Port	4-Port	6-Port
Ivory	NSP11I	NSP12I	NSP13I	NSP14I	NSP16I
Light Almond	NSP11LA	NSP12LA	NSP13LA	NSP14LA	NSP16LA
White	NSP11W	NSP12W	NSP13W	NSP14W	NSP16W



Unloaded Decorator Frames

Color	1-Gang, 1-Port	1-Gang, 2-Port	1-Gang, 3-Port	1-Gang, 4-Port	1-Gang, 6-Port	1-Gang, Adapter .406" Dia. Hole*	1-Gang, Adapter Blank**
Black	NS611BK	NS612BK	NS613BK	NS614BK	NS616BK	—	NS620BK
Ivory	NS611I	NS612I	NS613I	NS614I	NS616I	NS621I	NS620I
Light Almond	NS611LA	NS612LA	NS613LA	NS614LA	NS616LA	—	NS620LA
White	NS611W	NS612W	NS613W	NS614W	NS616W	NS621W	NS620W

Note: *For use with rotary dimmers or to pull through AV or telephone cable. **To fill an extra decorator opening or to create customized openings.

Wallplates

Snap-on wallplates offer a clean, elegant look that can be installed in seconds. Thermoplastic plates are virtually unbreakable, an eighth inch larger than standard to hide rough box openings for improved aesthetics. Greater strength, impact and chemical resistance with excellent cleanability.



Snap-On Wallplates

Description	Color	1-Gang	2-Gang	3-Gang	4-Gang
Decorator	Ivory	NPS26I	NPS262I	NPS263I	NPS264I
	Light Almond	NPS26LA	NPS262LA	NPS263LA	NPS264LA
	White	NPS26W	NPS262W	NPS263W	NPS264W
Toggle	Ivory	NPS1I	NPS2I	NPS3I	-
	Light Almond	NPS1LA	NPS2LA	NPS3LA	-
	White	NPS1W	NPS2W	NPS3W	-



Decorator Wallplates

Description	Color	1-Gang	2-Gang	3-Gang	4-Gang
Nylon Standard	Black	NP26BK	NP262BK	NP263BK	NP264BK
	Brown	NP26	NP262	NP263	NP264
	Ivory	NP26I	NP262I	NP263I	NP264I
	Light Almond	NP26LA	NP262LA	NP263LA	NP264LA
	White	NP26W	NP262W	NP263W	NP264W
Nylon Mid-size	Black	NPJ26BK	NPJ262BK	NPJ263BK	NPJ264BK
	Brown	NPJ26	NPJ262	NPJ263	NPJ264
	Ivory	NPJ26I	NPJ262I	NPJ263I	NPJ264I
	Light Almond	NPJ26LA	NPJ262LA	NPJ263LA	NPJ264LA
	White	NPJ26W	NPJ262W	NPJ263W	NPJ264W

Note: 5-gang (NP265 series) and 6-gang (NP266 series) available.



Toggle Switch Wallplates

Description	Color	1-Gang	2-Gang	3-Gang	4-Gang
Nylon Standard	Black	NP1BK	NP2BK	NP3BK	NP4BK
	Brown	NP1	NP2	NP3	NP4
	Ivory	NP1I	NP2I	NP3I	NP4I
	Light Almond	NP1LA	NP2LA	NP3LA	NP4LA
	White	NP1W	NP2W	NP3W	NP4W
Nylon Mid-size	Black	NPJ1BK	NPJ2BK	NPJ3BK	NPJ4BK
	Brown	NPJ1	NPJ2	NPJ3	NPJ4
	Ivory	NPJ1I	NPJ2I	NPJ3I	NPJ4I
	Light Almond	NPJ1LA	NPJ2LA	NPJ3LA	NPJ4LA
	White	NPJ1W	NPJ2W	NPJ3W	NPJ4W

Note: 5-gang (NP5 series) and 6-gang (NP6 series) available.


All nylon wallplates feature pre-inserted captive screws for faster assembly, up to 6-gang.

2-Gang Combination Wallplates



Description	Color	1-Toggle, 1-Duplex	1-Duplex, 1-Decorator	1-Toggle, 1-Decorator
Nylon Standard	Black	NP18BK	NP826BK	NP126BK
	Brown	NP18	NP826	NP126
	Ivory	NP18I	NP826I	NP126I
	Light Almond	NP18LA	NP826LA	NP126LA
	White	NP18W	NP826W	NP126W
Nylon Mid-Size	Black	NPJ18BK	NPJ826BK	NPJ126BK
	Brown	NPJ18	NPJ826	NPJ126
	Ivory	NPJ18I	NPJ826I	NPJ126I
	Light Almond	NPJ18LA	NPJ826LA	NPJ126LA
	White	NPJ18W	NPJ826W	NPJ126W

Duplex Receptacle Wallplates



Description	Color	1-Gang, 1-Duplex	2-Gang, 2-Duplex
Nylon Standard	Black	NP8BK	NP82BK
	Brown	NP8	NP82
	Ivory	NP8I	NP82I
	Light Almond	NP8LA	NP82LA
	White	NP8W	NP82W
Nylon Mid-Size	Black	NPJ8BK	NPJ82BK
	Brown	NPJ8	NPJ82
	Ivory	NPJ8I	NPJ82I
	Light Almond	NPJ8LA	NPJ82LA
	White	NPJ8W	NPJ82W

3-Gang Combination Wallplates



Description	Color	2-Toggle, 1-Duplex	2-Toggle, 1-Decorator
Nylon Standard	Black	–	NP226BK
	Brown	NP28	NP226
	Ivory	NP28I	NP226I
	Light Almond	NP28LA	NP226LA
	White	NP28W	NP226W
Nylon Mid-Size	Black	–	NPJ226BK
	Brown	NPJ28	NPJ226
	Ivory	NPJ28I	NPJ226I
	Light Almond	NPJ28LA	NPJ226LA
	White	NPJ28W	NPJ226W

Single Receptacle Wallplates



Description	Color	1-Gang, 1-Single 2.16 in. Dia. Hole	2-Gang, 1-Single 2.16 in. Dia. Hole
Nylon Standard	Black	NP724BK	NP703BK
	Brown	NP724	NP703
	Ivory	NP724I	NP703I
	White	NP724W	NP703W
Nylon Mid-Size	Black	NPJ724BK	NPJ703BK
	Brown	NPJ724	NPJ703
	Ivory	NPJ724I	NPJ703I
	White	NPJ724W	NPJ703W

*Metal Wallplates are also available.
See our full line catalog for details.*



Single 15/20A Straight Blade or 15A Twist-Lock® Receptacle Wallplates



Description	Color	1-Gang, 1-Single 1.40 in. Dia. Hole
Nylon Standard	Black	NP7BK
	Brown	NP7
	Ivory	NP7I
	Light Almond	NP7LA
	White	NP7W
Nylon Mid-Size	Black	NPJ7BK
	Brown	NPJ7
	Ivory	NPJ7I
	Light Almond	NPJ7LA
	White	NPJ7W

Weather Resistant Covers

NEMA 3R rated Extra Duty non-metallic while-in-use covers offer weather protection for outlets when they are in use. High impact polycarbonate construction provides maximum durability and longevity.

EXTRA DUTY® Non-Metallic While-In-Use Covers

Description	Dimensions Height x Width x Depth	EXTRA DUTY®
Standard size 1-gang box with clear tinted cover, for horizontal or vertical mounting; 16-in-1 configurations	5.90" X 4.18" X 2.75"	RW58300
Extra deep 1-gang box with clear tinted cover, for horizontal or vertical mounting; 16-in-1 configurations	5.92" X 4.20" X 4.75"	RW58350
Standard size 2-gang box, clear tinted cover, for horizontal or vertical mounting; 55-in-1 configurations	5.54" X 5.43" X 2.75"	RW58750



Electric Vehicle Charging Station

The HBLEV30B Electric Vehicle Charging Station enables fast level 2 charging of any SAE J1772 compatible electric vehicle. This new EV charger delivers power and offers a more compact, easy to use and easy to install solution to electric vehicle charging.

Compatible with all Electric Vehicle Supply Equipment (EVSE) Codes, Standards and Recommended Practices, including SAE J1772, NEC 625, UL 2231 and UL 2594.

Level 2 Electrical Vehicle Charging Station

Description	Catalog Number
EV Charging Station; 30A 208-240V AC, 7.2 kW output, wall mount; 20 ft. charging cable, plug-in installation	HBLEV30B
EV Charging Station; 30A 208-240V AC, 7.2 kW output, wall mount 20 ft. charging cable, hardwire installation	HBLEV30BHW

- Water-resistant enclosure is rated UL Type 3R/S for indoor and outdoor use
- Time delay feature to delay charge times for more economical charging rates
- "Auto-reset" feature enables charging to restart following a minor fault, thereby reducing the chance of having an undercharged battery



HUBBELL[®]
Wiring Systems

www.hubbell.com



Hubbell Wiring Device-Kellems
Hubbell Incorporated (Delaware)
40 Waterview Drive, Shelton, CT 06484
Phone (800) 288-6000 • FAX (800) 255-1031

Hubbell Premise Wiring
Hubbell Incorporated (Delaware)
23 Clara Drive, Suite 103, Mystic, CT 06355
Phone (800) 626-0005 • FAX (860) 535-8328

Printed in U.S.A. Specifications subject to change without notice. © Registered trademark of Hubbell Incorporated.

WLBS007 1/18