

Job Name \_\_\_\_\_

Contractor \_\_\_\_\_

Job Location \_\_\_\_\_

Approval \_\_\_\_\_

Engineer \_\_\_\_\_

Contractor's P.O. No. \_\_\_\_\_

Approval \_\_\_\_\_

Representative \_\_\_\_\_

## Series AS, AS-T

### Heavy Duty Cast Iron Air Separators

#### Sizes: 1" – 3"

Series AS Air Separator is designed for efficient separation of air from water in Hydronic Heating Systems. Watts air separators have heavy cast iron construction. They have tappings for the installation of an expansion tank and air vent. Entrapped air in the hot water heating system piping is dispersed by the internal agitator of the air separator as the water is recirculated within the heating system piping. This provides quiet efficient operation of the hot water heating system radiation.

#### Features

- 1/2" tappings on each side for fill valve piping
- Heavy cast iron construction
- Furnished with tappings for expansion tank and air vent
- Provides complete, purging and venting of air in the system when installed in conjunction with the Watts "FV4M1" or Duo Vent float vents
- Efficient separation of air

#### Models

##### AS – Sizes

1", 1 1/4", 1 1/2", 2", 2 1/2", 3" ,  
NPT female inlet/outlet connections. With 1/8" )  
female threaded connection for float vent and 1/2"  
female threaded connection for expansion tank.

##### AS-T – Sizes

1" and 1 1/4", with 1/2" feed water tapping

#### Pressure – Temperature

**Maximum Working Pressure:** 80psi (5.5 bar) at 275°F (135°C)



AS



AS-T



#### NOTICE

The information contained herein is not intended to replace the full product installation and safety information available or the experience of a trained product installer. You are required to thoroughly read all installation instructions and product safety information before beginning the installation of this product.

#### NOTICE

Inquire with governing authorities for local installation requirements


# Watts Specialty Items for Hydronic Heating Systems

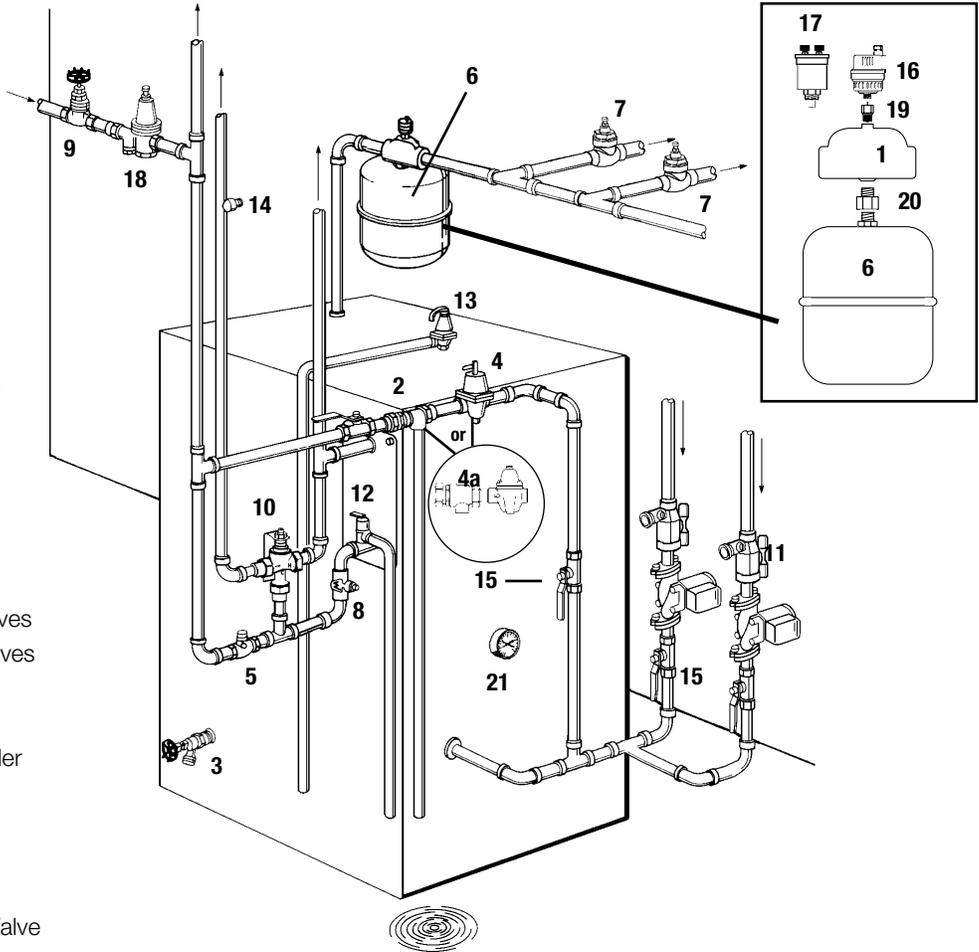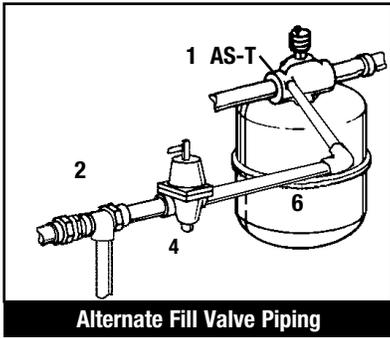

1. AS or AS-T Air Separator
2. 9D Backflow Preventer
3. BD,SW,SS Boiler Drain Valves
4. 1156F-A or 1156F, B1156F, N256, 1450F, T145B Boiler Fill Valves 4a 911S Combination S1156F Fill Valve and 9D Backflow Preventer
5. CV/CVY Bronze Check Valve
6. ET/ETX Expansion Tank
7. 2000, 2000S Flow Checks
8. P3 Flow Control Valve
9. GVS/GV Gate or GLV Globe Valves
10. 1170, 70A, N170-M2 Mixing Valves
11. RPV or PB56 Purge Valves
12. 3L, 53L Pressure Relief Valves
13. 374A, 174A, 740 Hot Water Boiler Safety Relief Valves
14. T&P Test Plug
15. B-6000 Ball Valve
16. FV-4M1 Float Vent Valve
17. DuoVent Automatic Float Vent Valve
18. U5B, 25AUB Water Pressure Reducing Valves
19. SCV 1/8" or 1/4" Service Check Valves
20. SCV 1/2" Service Check Valve
21. DPTG Temperature/Pressure Gauge

## Dimensions

MODEL	SIZE	DIMENSIONS										WEIGHTS			
		A	B	C	D	D1	E								
	in.	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	lbs.	kg
AS-M1	1	6 1/4	159	4	102	2 3/4	70	1/8	3	-	-	1/2	13	4.5	2.0
AS-T-M1	1	6 1/4	159	4	102	2 3/4	70	1/8	3	1/2	13	1/2	13	4.5	2.0
AS-M1	1 1/4	6 1/4	159	4	102	2 3/4	70	1/8	3	-	-	1/2	13	4.5	2.0
AS-T-M1	1 1/4	6 1/4	159	4	102	2 3/4	70	1/8	3	1/2	13	1/2	13	4.5	2.0
AS-M1	1 1/2	8	203	5 5/16	135	3 5/8	92	1/8	3	1	25	1/2	13	7.4	3.4
AS-M1	2	8	203	5 5/16	135	3 5/8	92	1/8	3	1	25	1/2	13	7.4	3.4
AS-M1	2 1/2	10 5/16	262	7 1/4	184	5	127	1/8	3	1	25	1/2	13	15.0	6.8
AS-M1	3	10 5/16	262	7 1/4	184	5	127	1/8	3	1	25	1/2	13	15.0	6.8

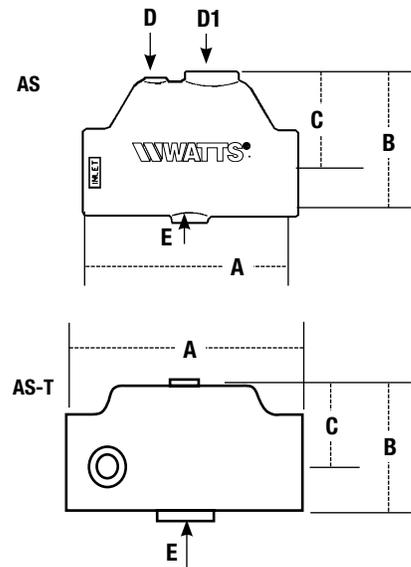

USA: T: (978) 689-6066 • F: (978) 975-8350 • Watts.com  
 Canada: T: (905) 332-4090 • F: (905) 332-7068 • Watts.ca  
 Latin America: T: (62) 81-1001-8600 • Watts.com