




2475.550 Shown

MODEL NUMBER:

- 2475.550 Centerset Laundry Sink Faucet**
Lever handles. Aerator.
- 2475.550.F15 Centerset Laundry Sink Faucet**
Lever handles. Aerator.
- 2475.540 Centerset Laundry Sink Faucet**
Lever handles. Hose end.

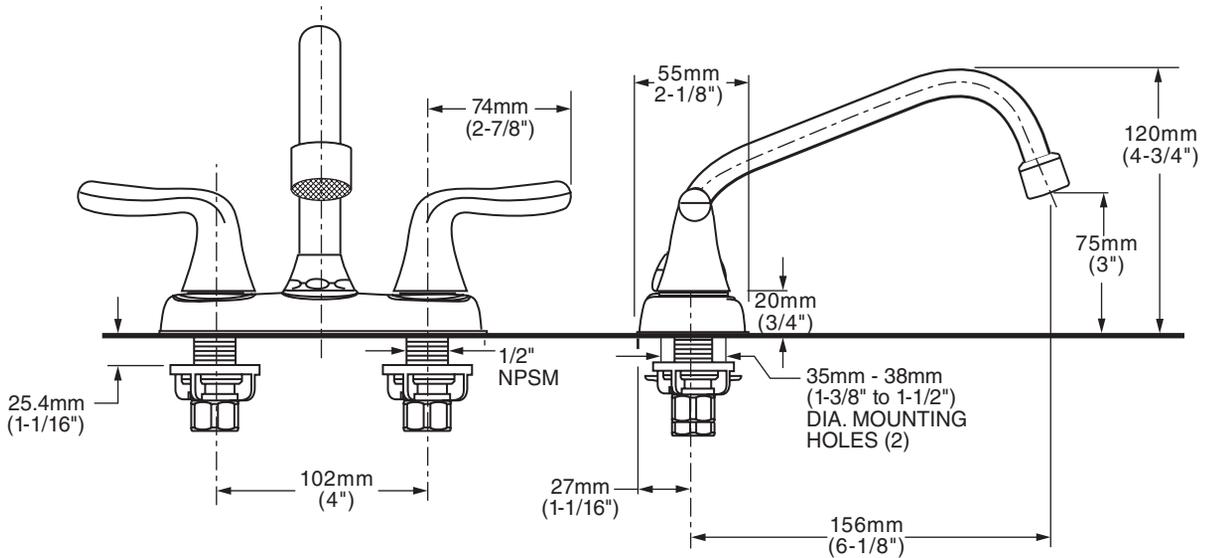

GENERAL DESCRIPTION:

Durable brass construction. 1/4 turn washerless ceramic disc valve cartridges. One-half inch male inlet shanks with brass coupling nuts. Brass swivel spout (360° rotation). Available with hose end or aerator with 2.2 gpm/8.3 L/min. maximum flow rate, 1.5 gpm/5.7 L/min. maximum flow rate for F15 models.

PRODUCT FEATURES:

- Ceramic Disc Valve Cartridges:** Assures a lifetime of drip-free performance.
- Solid Brass Construction:** Durable. Ideal for prolonged contact with water.
- Low Lead:** Meets NSF Standard 61/Section 9 & Prop 65 lead requirements.
- Choice of Spout End:** Hose end or Aerator.


SUGGESTED SPECIFICATION:

Two-handle centerset laundry sink faucet shall be brass construction with brass inlet shanks and coupling nuts. Shall also feature 1/4 turn washerless ceramic disc valve cartridges. Fitting shall be American Standard Model # 2475.5_____.


CODES AND STANDARDS

These products meet or exceed the following codes and standards:


- ANSI A117.1
- ASME A112.18.1
- CSA B 125
- NSF 61/Section 9

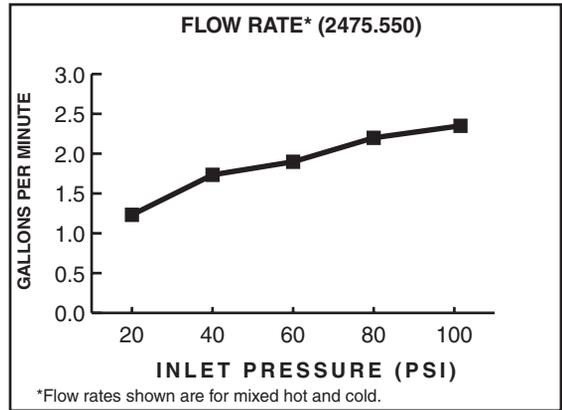

2.2gpm/8.3L/min. FLOW RATE

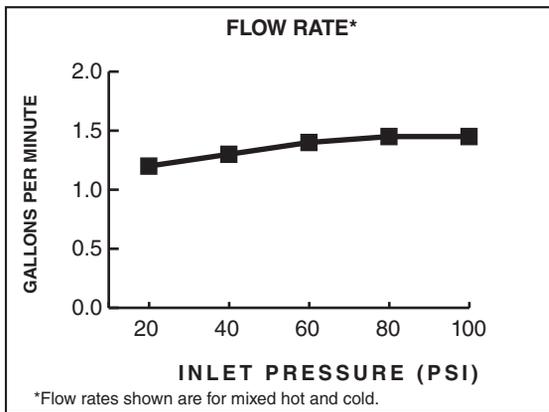

1.5gpm/5.7 L/min. FLOW RATE

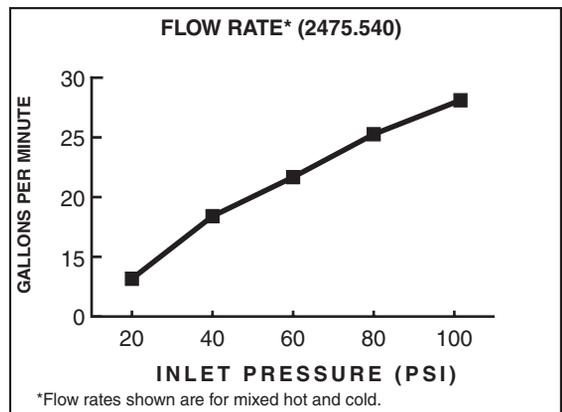

Product Number	Description	Finish
		Polished Chrome 002
2475.540	Laundry Sink faucet. Lever handles. Hose end.	
2475.550	Laundry Sink faucet. Lever handles. Aerator - 2.2 gpm/8.3 L/min. maximum flow rate	
2475.550.F15	Laundry Sink faucet. Lever handles. Aerator - 1.5 gpm/5.7 L/min. maximum flow rate	

 Meets the American Disabilities Act Guidelines and **ANSI A117.1** Requirements for the physically challenged.