

## PRESSURE BALANCE BATH/SHOWER FITTING WITH WATER-SAVING SHOWERHEAD



T722.508 Bath/Shower Trim Shown

### GENERAL DESCRIPTION:

#### SHOWERHEAD

Water saving 3-function showerhead.  
At maximum 1.75 gpm/6.61 L/min. flow rate.

#### WALL TUB SPOUT

Metal slip-on diverter spout.

#### WALL VALVE TRIM

Metal lever handle.  
Metal wall escutcheon.


- Coordinates with Estate® Suite of fixtures.
- Available Exclusively at Ferguson® Showrooms.

### MODEL NUMBER:

#### TRIM KITS:

- ☐ T722.508 Estate BATH/SHOWER Trim Kit  
Lever handle. Water-saving showerhead. LESS valve body.
- ☐ T722.507 Estate SHOWER ONLY Trim Kit  
Lever handle. Water-saving showerhead. LESS valve body.

**For use with R110 Series Pressure Balance Valves.  
See reverse side for available Rough Valves.**

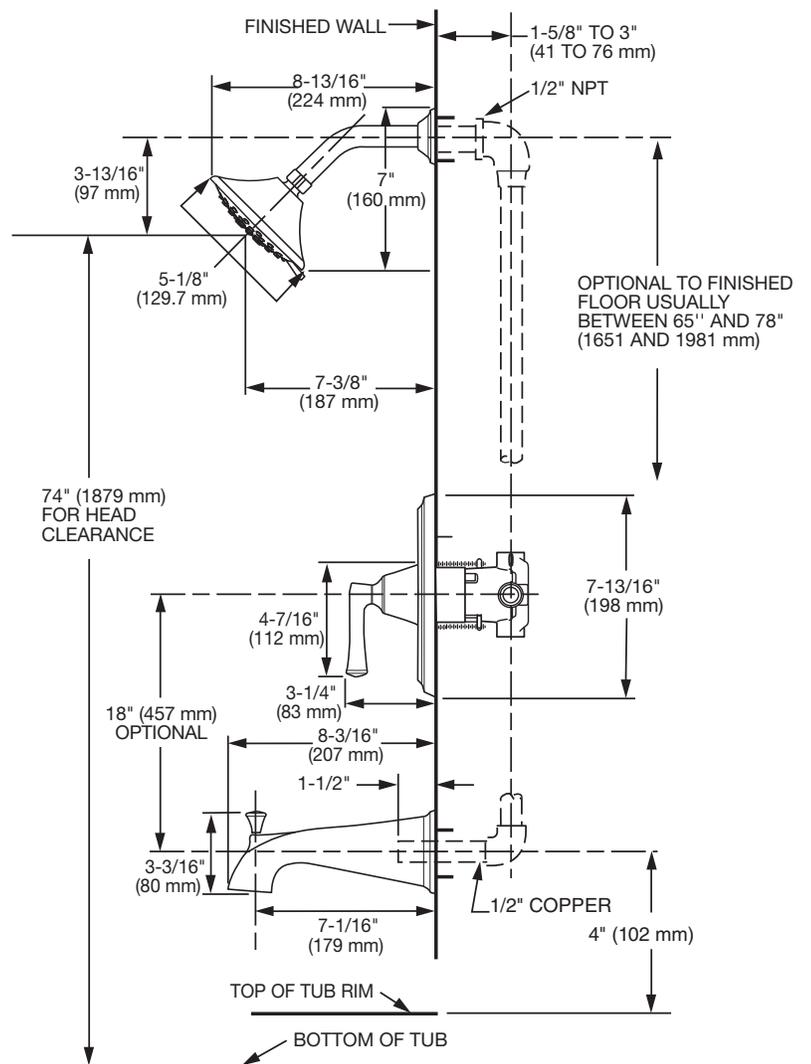

### SUGGESTED SPECIFICATION


Bath/shower fitting shall feature water saving 3-function showerhead with Max. 1.75 gpm/6.61 L/min. flow rate. Fitting shall be: American Standard - Trim Kit Model # T722.50\_ and Valve Body Model # R11\_.

## PRESSURE BALANCE BATH/SHOWER FITTING WITH WATER-SAVING SHOWERHEAD

### CODES AND STANDARDS

These products meet or exceed the following codes and standards:

- ANSI A117.1
- ASSE 1016
- ASME A112.18.1
- CSA B125.1

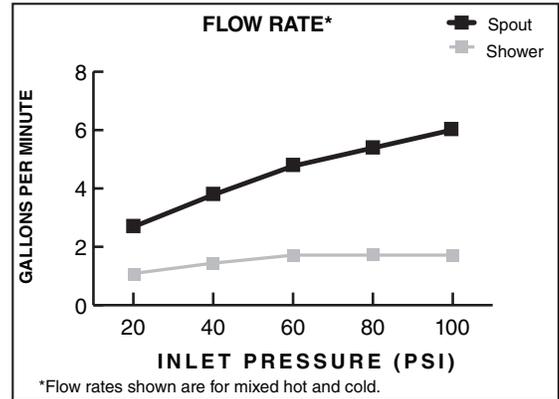

TRIM KITS *	Product Number	Description	* TRIM & ROUGH MUST BE ORDERED SEPARATELY.	Finish Options			
				Polished Chrome	PVD Polished Nickel	Legacy Bronze	PVD Brushed Nickel
				002	013	013	295
T722.508	Bath/Shower Trim Kit. Metal lever handle. Water-Saving showerhead. LESS valve body.	ADA					
T722.507	Shower Only Trim Kit. Metal lever handle. Water-saving showerhead. LESS valve body.	ADA					

ROUGH VALVE BODIES	Product Number	Description
	R111	Rough Valve Body less trim. Universal inlets/outlets.
	R111SS	Rough Valve Body less trim. Universal inlets/outlets with Screwdriver Stops.
	R110	Rough Valve Body less trim. Direct sweat inlets/outlets.
	R110SS	Rough Valve Body less trim. Direct sweat inlets/outlets with Screwdriver Stops.
	R115	Rough Valve Body less trim. Female Thread inlets/outlets.
	R115SS	Rough Valve Body less trim. Female Thread inlets/outlets with Screwdriver Stops.
	R117	Rough Valve Body less trim. PEX inlets/universal outlets for Crimp Ring PEX system (ASTM F1807).
	R117SS	Rough Valve Body less trim. PEX inlets/universal outlets for Crimp Ring PEX system (ASTM F1807) with Screwdriver Stops.
	R118	Rough Valve Body less trim. PEX inlets/universal outlets for Cold Expansion PEX system (ASTM F1960).
	R118SS	Rough Valve Body less trim. PEX inlets/universal outlets for Cold Expansion PEX system (ASTM F1960) with Screwdriver Stops.
	R119	Rough Valve Body less trim. CPVC inlets/universal outlets.
	R119SS	Rough Valve Body less trim. CPVC inlets/universal outlets with Screwdriver Stops.

 Meets the American Disabilities Act Guidelines and **ANSI A117.1** Requirements for the physically challenged.