


0806xx12NL SERIES NO LEAD BRASS SWING CHECK VALVE (CxC)

SPECIFICATION:


- Sweat connections conform to ANSI B16.18
- Max Pressure Rating: 200 PSI WOG Non-Shock
- WOG pressure rating based on ambient temperature
- Max Temperature Rating: 212°F (100°C)

CERTIFICATION:

- NSF/ANSI Standard 372 Certified



PRESSURE RATING		
Flow Rate	Pressure Drop	Cv Factor
GPM @ 25 PSI	PSI	
11.40	5	5.09
20.25	5	9.05
39.42	5	17.62
59.53	5	26.61
73.88	5	33.02
103.03	5	46.05
267.72	10	84.60
299.39	10	94.61

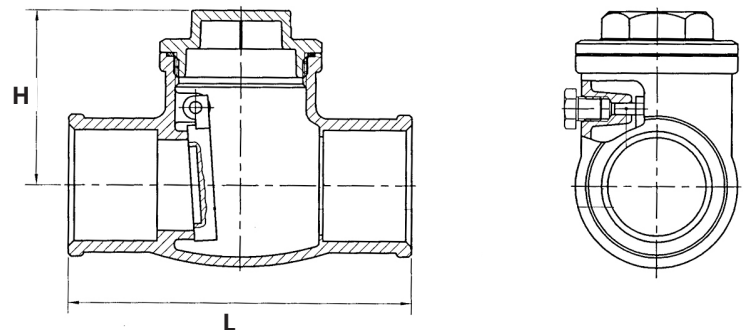

MATERIAL LIST	
Name	Material
Cap	No Lead Brass
Packing	Fibre "H"
Disc	No Lead Brass
Body	No Lead Brass
Bolt	No Lead Brass
Pin	No Lead Brass

DIMENSIONS							
Part No.	Size	Port Dia.	L		H		Weight
		inches	inches	mm	inches	mm	
08060312NL	1/2"	0.52	2.40	61.00	1.40	35.50	180
08060412NL	3/4"	0.75	3.15	80.00	1.52	38.50	250
08060512NL	1"	0.93	3.50	89.00	1.73	44.00	380
08060612NL	1-1/4"	1.25	4.15	105.50	2.07	52.50	670
08060712NL	1-1/2"	1.38	4.57	116.00	2.13	54.00	830
08060812NL	2"	1.81	5.47	139.00	2.68	68.00	1330
08060912NL	2-1/2"	2.36	6.89	175.00	3.09	78.50	2360
08061012NL	3"	2.56	7.68	195.00	3.80	96.50	3750

BOSHART
INDUSTRIES

25 Whaley Avenue, PO Box 310, Milverton, ON CANADA N0K 1M0
Tel: 800-561-3164

boshart.com ♦ blog.boshart.com