


17CVNL SERIES NO LEAD BRONZE CHECK VALVE (THREADED)

Specification:




- Threads conform to ANSI/ASME B1.20.1
- Max Pressure Rating: 200 PSI
- 200 PSI WOG Non-Shock - WOG pressure rating based on ambient temperature
- Max Temperature Rating: 180°F (82°C)
- Cast no lead bronze body and poppet
- NBR (Nitrile Buna-N) o-ring seal

Certification:

- NSF/ANSI Standard 372 Certified



MATERIAL LIST	
Part Name	Material
Hex Nut	304 Stainless Steel
Cup Washer	304 Stainless Steel
Spring	304 Stainless Steel
Bushing	Polyethylene
Body	C89844 Bronze
O-ring	NBR
Poppet	C89844 Bronze

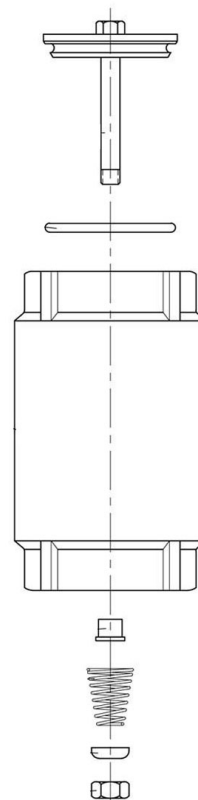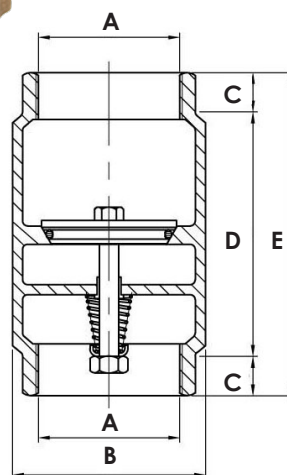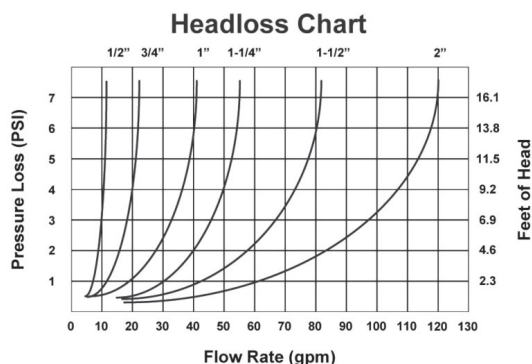

DIMENSIONS										
Part No.	A	B		C		D		E		Weight
		inches	mm	inches	mm	inches	mm	inches	mm	
17CV050NL	1/2" FPT	1.22	30.99	0.37	9.49	1.61	41.00	2.36	59.99	190
17CV075NL	3/4" FPT	1.45	37.01	0.39	10.01	1.85	46.99	2.63	67.00	270
17CV100NL	1" FPT	1.73	43.99	0.45	11.51	2.24	57.00	3.15	80.01	390
17CV125NL	1-1/4" FPT	2.08	53.01	0.53	13.49	2.48	62.99	3.54	89.99	600
17CV150NL	1-1/2" FPT	2.36	59.99	0.61	15.49	2.82	71.70	3.93	100.00	750
17CV200NL	2" FPT	2.95	75.01	0.65	16.51	3.42	87.00	4.72	119.99	1400
17CVMF-125-100NL	1" FPT x 1-1/4" MPT	1.73	43.99	0.45	11.51	2.24	57.00	3.15	80.01	380

BOSHART
INDUSTRIES

25 Whaley Avenue, PO Box 310, Milverton, ON CANADA N0K 1M0
Tel: 800-561-3164

boshart.com ♦ blog.boshart.com

© 2020 Boshart Industries Inc. All Rights Reserved.

BII-17CVNL-0520(1311,81CV)