

For Residential and Commercial Applications

Job Name		Engineer / Architect	
Job Location		Wholesaler	
Submittal Date		Contractor	

B8-**DW Speedi Plumb® PLUS Braided Dishwasher Connector - Female Iron Pipe Inlet

Use: For use in potable water distribution systems in accessible locations only.

Design Features:

- **Engineered polymer braided** fibers bend freely without kinking or crimping
- **Reinforced PVC inner hose** ensures durability
- **Rubber washers** provide a large pliable sealing surface and ensure a long lasting water-tight connection
- **8-sided pneumatic crimp** provides greater dependability for reliable nut-to-hose connections
- **No Lead**

Operating Specifications:


Temperature: 40° to 140° F, intermittent to 180° F

Pressure: 125 PSI maximum

Tube Diameter: 0.300" ID (0.550" OD)



CONNECTOR MATERIAL SPECIFICATIONS	
Inner Hose	Reinforced PVC
Braiding	PVC coated polyester yarn
Barb	Brass
Ferrule	Zinc-plated steel
Nut	Brass, chrome plated
Washer	Rubber
Compression Nut	Brass, chrome plated
MIP Elbow	Brass
Garden Hose Elbow	Brass
Garden Hose Nut	Brass

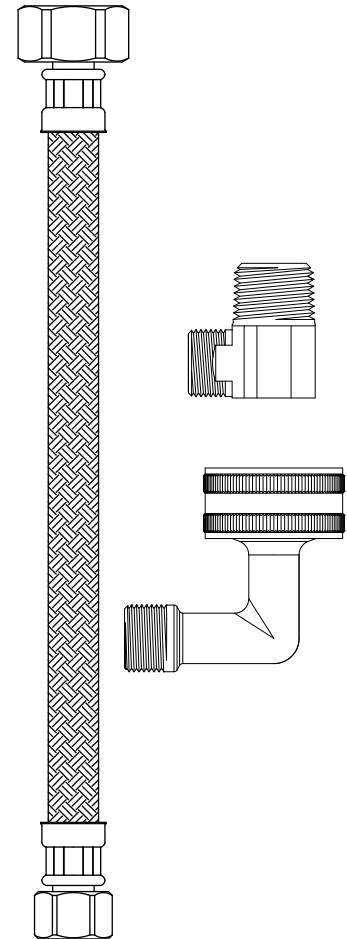

Part Listing:

- B8-48DW F 1/2" FIP x 1/2" FIP x 48" length
- B8-60DW F 1/2" FIP x 1/2" FIP x 60" length
- B8-48DW6 D 1/2" FIP x 3/8" compression with 3/8" MIP elbow x 48" length, carded
- B8-60DW6 D 1/2" FIP x 3/8" compression with 3/8" MIP elbow x 60" length, carded
- B8-48DW6 P 1/2" FIP x 3/8" compression with 3/8" MIP elbow x 48" length, bagged
- B8-60DW6 P 1/2" FIP x 3/8" compression with 3/8" MIP elbow x 60" length, bagged


This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing, and shall not be disclosed to others without the written consent of BrassCraft Mfg. This specification must be returned to BrassCraft Mfg. if requested.



B8-**DW Speedi Plumb® PLUS Braided Dishwasher Connector - Female Iron Pipe Inlet

Part Listing Cont'd:

- B8-48DW12 F 1/2" FIP x 3/8" compression with 3/4" garden hose elbow x 48" length
- B8-60DW12 F 1/2" FIP x 3/8" compression with 3/4" garden hose elbow x 60" length

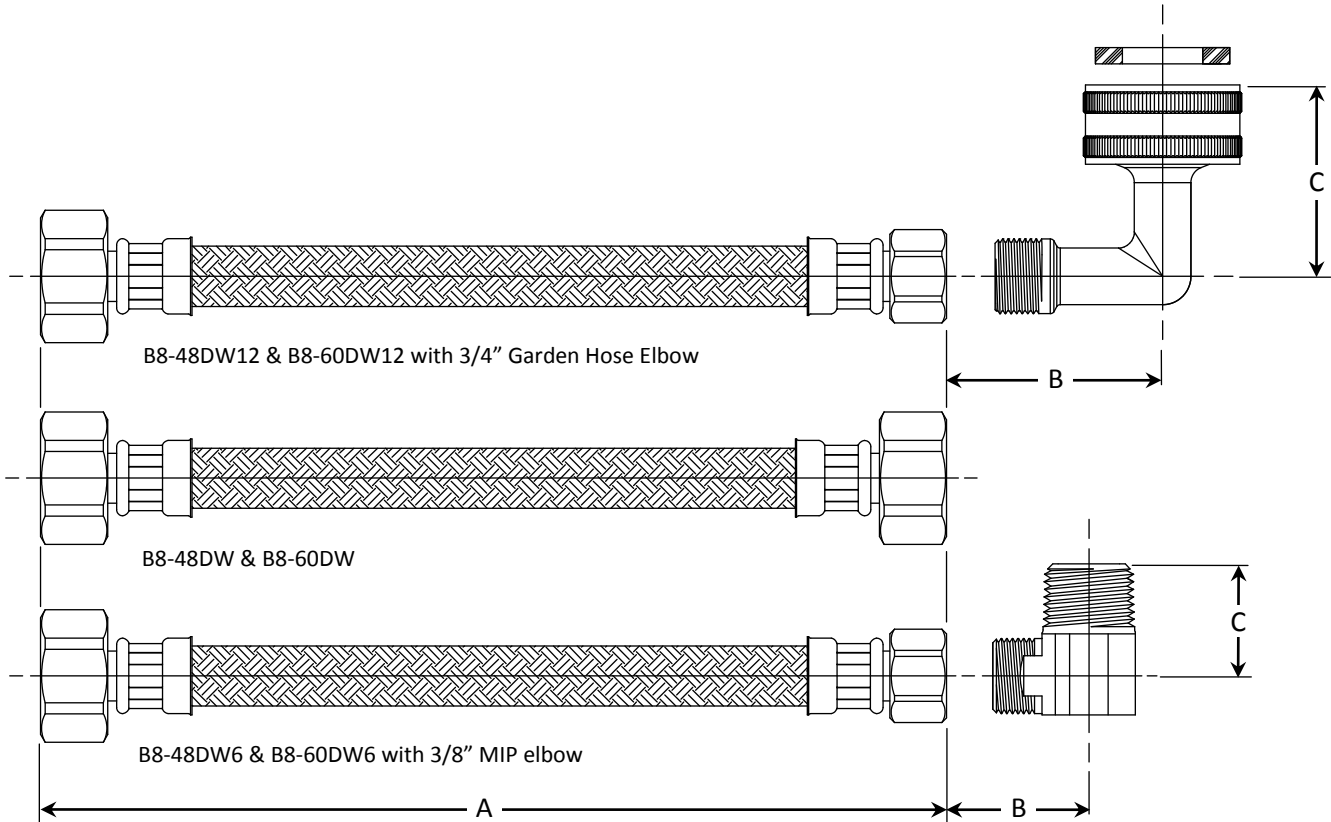

PART DIMENSIONS (Inches)			
Model	DIM. A	DIM. B	DIM. C
B8-48DW	48.0/49.0	N/A	N/A
B8-60DW	60.0/61.0	N/A	N/A
B8-48DW6	48.0/49.0	.72	.84
B8-60DW6	60.0/61.0	.72	.84
B8-48DW12	48.0/49.0	.96	1.42
B8-60DW12	60.0/61.0	.96	1.42

Listings & Certifications:

- IAPMO listed to ASME A112.18.6 / CSA B125.6 (File # 0452)
- CSA listed to ASME A112.18.6 / CSA B125.6 (File #204593)
- No-Lead product CSA listed to Low-Lead Content Certification Program – Plumbing Products Class 6853-01



This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing, and shall not be disclosed to others without the written consent of BrassCraft Mfg. This specification must be returned to BrassCraft Mfg. if requested.

BrassCraft®