


# P4D

## High Performance Parabolic

PARABOLICS

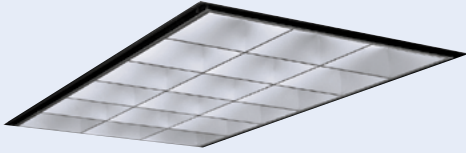

### FEATURES

- Nominal 3" deep louver
- Black reveal
- Matte anodized low iridescent, semi-specular (MA) louver finish virtually eliminates visibility of fingerprints and construction dust
- Shallow housing
- Lightweight
- UL listed 1598, cUL or CSA. Damp Location standard



### ORDERING INFORMATION

<b>P4D</b>			<b>G</b>	<b>MA</b>		<b>S</b>			
<b>MODEL</b>	<b>NO. OF LAMPS</b>	<b>CEILING TYPE</b>	<b>CELLS WIDE BY CELLS LONG</b>	<b>BALLAST</b>	<b>VOLTAGE</b>	<b>OPTIONS</b>			
<b>P4D</b> High Performance Parabolic	2 Two 3 Three See Product Availability table below.	<b>G</b> Grid For hard ceilings, use flange kit. See options in Technical section.	See Product Availability table below.	<b>NOTE:</b> See Technical Section for other ballast options. <b>E</b> Electronic T8, Instant Start <b>3E</b> 3-Lamp Electronic T8, Instant Start <b>EP</b> Electronic T8, Programmed Start <b>3EP</b> 3-Lamp Electronic T8, Programmed Start <b>ETT</b> Electronic Twin Tube, Instant Start (Specify voltage)	<b>U</b> 120V-277V <b>347</b> 347V	<b>F835</b> 35K 78+CRI T8 Lamps Installed <b>F841</b> 41K 78+CRI T8 Lamps Installed <b>F0835</b> 35K 82CRI T8 Lamps Installed <b>F0841</b> 41K 82CRI T8 Lamps Installed <b>2BC</b> Two Ballast Covers <b>C388</b> 3-Wire Flex <b>C488</b> 4-Wire Flex <b>EL</b> Emergency Battery Pack <b>GLR</b> Fast Blow Fuse <b>GMF</b> Slow Blow Fuse <b>PAF</b> Paint After Fabrication <b>TB4</b> (4) Bulk T-Bar Clips			
<b>SIZE</b>	<b>LAMP TYPE</b>	<b>LOUVER FINISH</b>	<b>AIR HANDLING</b>						
<b>22</b> 2' × 2' <sup>12</sup>	<b>17</b> 2', T8: 17 Watt	<b>MA</b> Matte Anodized Low Iridescent Semi-Specular Aluminum (Std.)	<b>S</b> Static <sup>1</sup>						
<b>24</b> 2' × 4'	<b>31U1</b> U-Bent, 1½" Leg Spacing T8: 31 Watt <b>32</b> 4', T8: 32, 30, 28 or 25 Watt <b>32U6</b> U-Bent, 6" Leg Spacing T8: 32 Watt <b>40TT</b> Twin Tube Compact, 2G11 Base: 40 Watt								

For other options see Technical section. Options and configurations may change fixture dimensions.

<sup>1</sup> All fixtures supplied with integral T-Bar clips.

<sup>2</sup> Various options may increase fixture height on 2' × 2'.

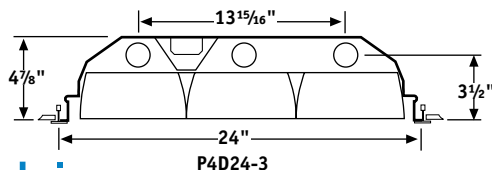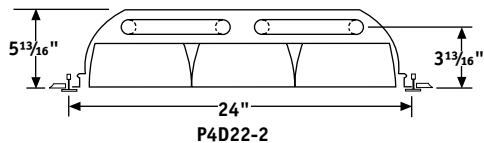

### PRODUCT AVAILABILITY

SIZE	NO. OF LAMPS	LAMP TYPE	LOUVER CONFIGURATIONS
2' × 2'	2	17, 31U1, 32U6, 40TT	<b>3 × 3 (9)</b>
	3	17, 31U1, 40TT	<b>3 × 3 (9)</b>
2' × 4'	3	32	<b>3 × 6 (18)</b>

Standard louver configurations shown in bold. Ballast quantities or emergency pack options may be restricted in some models.