

Vacuum Breakers

TECK[®]
COMMERCIAL

DELTA[®]

IN-LINE STYLE

❑ 060715A (Used for -9 Models)

C.P. In-line dual check vacuum breaker, 3/8" F.I.P. inlet and 3/8" M.I.P. outlet. This model is provided as standard with "-9" faucet series

Purpose:

To prevent back-siphonage of contaminated water into a potable water supply. These devices are **NOT** to be used under continuous pressure (ie., There cannot be a downstream shutoff valve).

Features:

- Dual check preventing discharge of waste water if primary check fails
- Vandal resistant
- Above average flow rates and lower pressure losses
- Brass construction

❑ 060708A (Special Use Only)

C.P. In-line dual check vacuum breaker, 3/8" F.I.P. inlet and outlet


Purpose:

To prevent back-siphonage of contaminated water into a potable water supply. This device **CAN** be used under continuous or intermittent pressure (ie., There can be a downstream shutoff valve and the outlet of the hose can be used above the vacuum breaker).

Features:

- Dual check preventing discharge of waste water if primary check fails
- Vandal resistant
- Above average flow rates and lower pressure losses
- Brass construction

060715A



060757A



ATMOSPHERIC STYLE

❑ 060757A (Used for -10 Models)

C.P. atmospheric vacuum breaker with 3/8" F.I.P. inlet and outlet. This model is provided as standard with "-10" faucet series

Purpose:

To prevent back-siphonage of contaminated water into a potable water supply. This device is **NOT** to be used under continuous pressure (ie., There cannot be a downstream shutoff valve), or where there is a possibility that a back pressure condition may develop (ie., The vacuum breaker must always be at least 6" above the highest point of the outlet of the attached hose).

Features:

- Ideally recommended for **low flow** installations such as laboratory equipment which use a small amount of water
- Lightweight disk assembly prevents spilling under **all** rates of flow
- Single check
- Durable silicone disk allowing high heat and water hammer shock resistance
- Provides superior performance when used with aspirator assemblies
- Brass construction


Vacuum Breakers

TECK[®]
COMMERCIAL

DELTA


060708A

In-line dual check vacuum breaker
(continuous pressure applications)




060715A

In-line dual check vacuum breaker



060757A

Atmospheric vacuum breaker

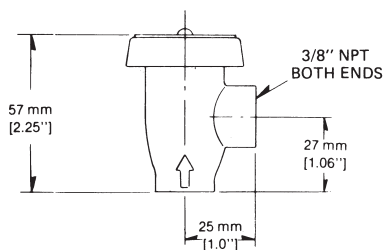


Note: All vacuum breakers require regular maintenance, cleaning, and servicing to ensure proper performance. To obtain internal repair parts for the above, contact Watts Regulator with the Watts model numbers shown below.

	Watts #
060757A	3/8 288A
060708A	3/8 N9
060715A	3/8 NLF9R


Atmospheric:

CAPACITY

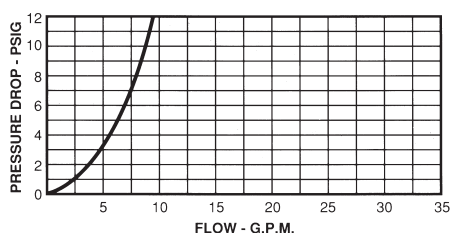

In-Line:

CAPACITY

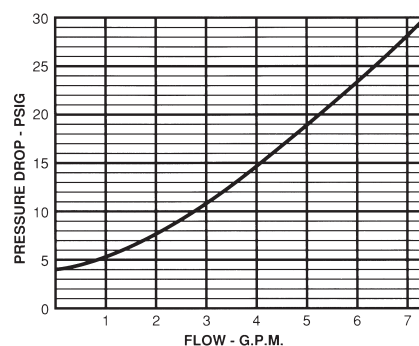

Approvals and Standards Met:

SP In-line: 060715A CSA certified to B64.7 with compliance to ASSE 1035

060708A CSA certified to B64.8

Atmospheric: 060757A CSA certified to B64.1.1 with compliance to ASSE 1001

Note: Measurements may vary $\pm 6\text{mm}$ (0.25")


Refer to www.specselect.com for individual models.

Note: Use this page front and back as a product submittal sheet.

SPOUT OUTLETS


060719A

Flow control aerator (2.2 USGPM)




060723A

Vandal resistant flow control aerator

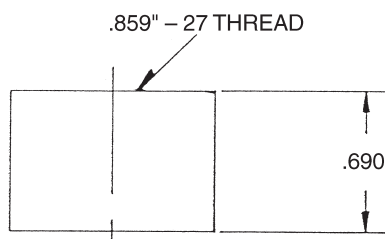


063046A

Hose End

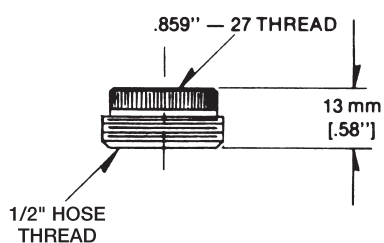


W6878

Flow control aerator & adaptor
(2.2 USGPM)




063116A

Adaptor




SERRATED NOZZLES

068049A

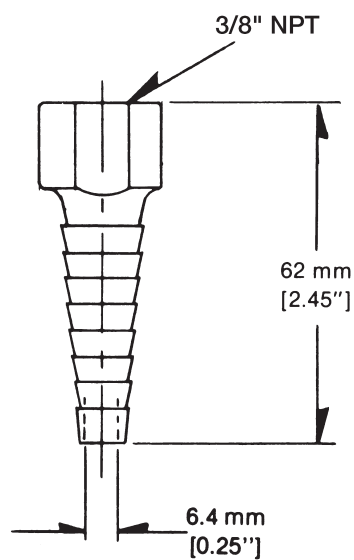

068041A

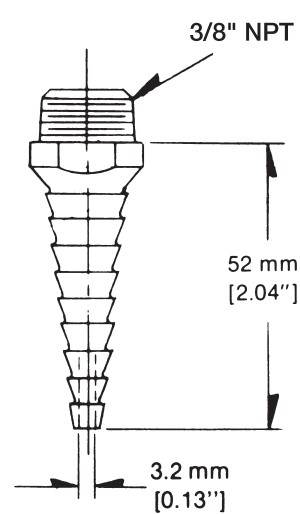


Note: Measurements may vary ± 6 mm (0.25")

Refer to www.specselect.com for individual models.

CONNECTORS


068047A

Nut & Washer
for 1/2" Shank with tail




068092A

1/4" I.P. tail and coupling nut
for 3/8" NPS shank



Note: Measurements may vary $\pm 6\text{mm}$ (0.25")

STRUCTURES



060047A

TECK® Lab Compression Structure (RH) and renewable seat (replaces W6991)

060048A

TECK® Lab Compression Structure (LH) and renewable seat

Features:

- Life tested to 500,000 cycles
- Stem threads are permanently lubricated and outside the waterway, eliminating thread seizing
- Stainless Steel seat washer screw
- Nickel chrome-plated renewable brass seat


OPTIONAL HANDLES

Institutional Handles

060046A



2-3/4" lever blade handle with screw, red & blue index




Features:


- Requires less than 5 lbs. to operate
- Single handle per pack

W6971

2 arm TECK® handle and screw




060865A

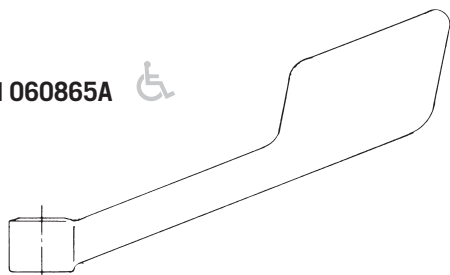

Features:

- 6" wrist handle with screw, red & blue index
- Requires less than 5 lbs. to operate
- Single handle per pack
- Requires 060037A Sani-Guard® (2 per pack)


060037A



Features:

- Sani-Guard® required along with TUF-TECK® structure when either 060865A or 060864A is specified (2 per pack)

060864A



Features:

- 4" wrist handle with screw, red & blue index
- Requires less than 5 lbs. to operate
- Requires 060037A Sani-Guard® (2 per pack)
- Single handle per pack

Note: Measurements may vary $\pm 6\text{mm}$ (0.25")

Refer to www.specselect.com for individual models.