


Electronic Concealed Flushvalve

160_T6_ _ _ A series

Write purchase model number here for future reference

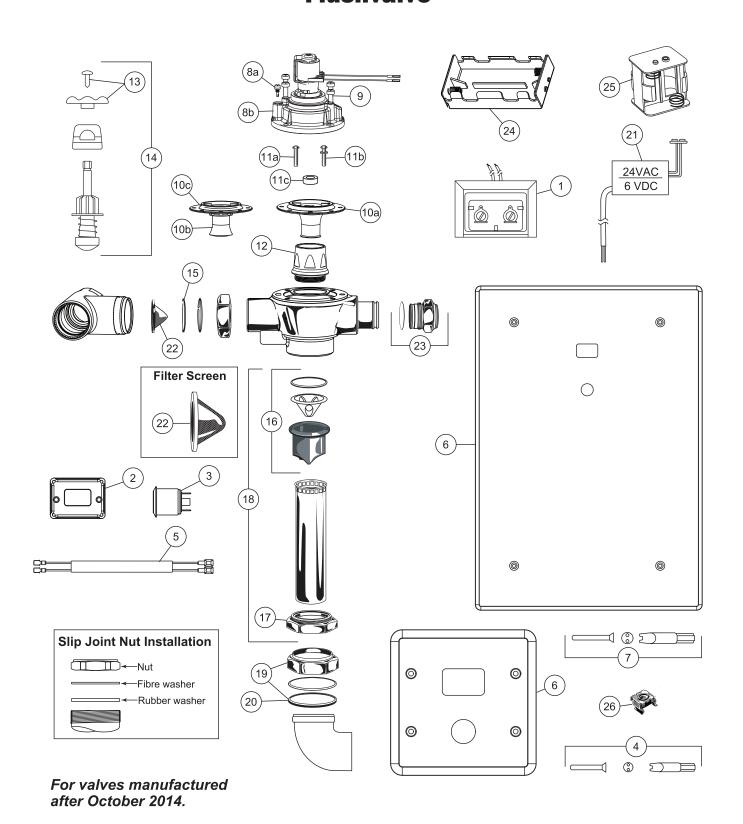

PLEASE LEAVE this M&I Sheet with the owner, maintenance plumber, etc as items relating to ongoing maintenance suggestions and procedures are included.

| Item # | Part # | Description | | | |
|--------|--|--|--|--|--|
| | 060799A | Universal TECK washers and O-rings repair kit | | | |
| | 061025A | Universal TECK parts washers and O-rings repair kit | | | |
| 1 | 060704A* 060771A* | Transformer (110 to 24 VAC) for 5 sensor modules Transformer (110 to 24 VAC) for 10 sensor modules | | | |
| 2 | 061273A ** 061272A ** | Sensor module - urinal flush valve Sensor module - water closet flush valve | | | |
| 3 | 060679A | Override button assembly | | | |
| 4 | 060072A | No. 6 - 32 x 2" flat head stainless steel screws (4/pkg) and security spanner bit package for 4-1/2" (114 mm) cover | | | |
| 5 | 060680A | 48" (1,220 mm) Solenoid Extension Wire | | | |
| 6 | 061244A 060674A 060675A | 4-1/2" x 4-1/2" (114 mm x 114 mm) (shown) stainless steel cover with studs and screws 14" x 14" (356 mm x 356 mm) (not shown) stainless steel cover with studs and screws 14" x 20" (356 mm x 508 mm) (shown) stainless steel cover with studs and screws | | | |
| 7 | 060073A | No.10 - 32 x 2" flat head stainless steel screws (4/pkg) and security spanner bit package for 14" (356 mm) covers | | | |
| 8a | 061024A | Regulating screw and O-ring | | | |
| 8b | 061341A ** 061342A ** 061343A ** 061344A ** 061345A ** 061346A ** 061169A ** | Cap/Solenoid & Regulating Screw Assembly for 0.5L (0.125 gal) fixed urinals (see Table 1) Cap/Solenoid & Regulating Screw Assembly for 1.9L (0.5 gal) fixed urinals (see Table 1) Cap/Solenoid & Regulating Screw Assembly for 4.2L (1.1 gal) fixed water closets (see Table 1) Cap/Solenoid & Regulating Screw Assembly for 4.8L (1.27 gal) fixed water closets (see Table 1) Cap/Solenoid & Regulating Screw Assembly for 6.0L (1.6 gal) fixed water closets (see Table 1) Cap/Solenoid & Regulating Screw Assembly for 1.9L (0.5 gal) adjustable urinals (see Table 1) Cap/Solenoid & Regulating Screw Assembly for 6.0L (1.6 gal) adjustable water closets (see Table 1) | | | |
| 9 | 060078A | Screws for Cast Cap (4/pkg) | | | |
| 10a | 061323A *** | Diaphragm/Guide Assembly Complete - W/C (see Table 1) | | | |
| 10b | 061324A *** | Diaphragm Guide Assembly for Urinals (See Table 1) | | | |
| 10c | 060079A-MMO | Diaphragm only (12/pkg) | | | |
| 11a | 060507A | Poppet Pin Pack (3/pkg) (also see 11b) (See Table 1) | | | |
| 11b | 060508A | Poppet Pin Pack (3/pkg) (0.5L Valves only) (See Table 1) | | | |
| 11c | 062025A | Washer (3/pkg) (required for 6.0 & 4.8L Valves only) (See Table 1) | | | |
| 12 | 062007A *** | Brass seat with O-ring | | | |
| 13 | 060479A | Handle and screw | | | |
| 14 | 060845A | Retrofit check stem unit, capnut and handle complete | | | |
| 15 | 060082A | Adjustable Tail O-Ring Package (20/pkg) | | | |
| 16 | 060785A | Vacuum breaker sleeve complete | | | |
| 17 | 060094A | Coupling ring | | | |
| 18 | 060782A 060783A | 1-1/2" x 10" (38 mm x 254 mm) V.B., coupling ring and tube complete 1-1/2" x 22-3/4" (38 mm x 578 mm) V.B., coupling ring and tube complete | | | |
| 19 | 060778A 060463A | 1½" Rough Coupling Nut & Washers ¾" Coupling Nut, ¾" Washers & ¾" Spud Flange | | | |
| 20 | 060083A 060049A | 1½" Slip Joint Washers (12/pkg) ¾" (19mm) Rubber and fiber washers (12/pkg) | | | |
| 21 | 060683A * | 24VAC to 6VDC converter | | | |
| 22 | 060344A | Filter screen kit (12/pkg) | | | |
| 23 | 060342A | Plug and O-ring for handle end | | | |
| 24 | 060681A | Flat battery holder (4 "C" cell batteries) | | | |
| 25 | 060684A | Square battery holder (4 "C" cell batteries) - required for 4" (102 mm) box | | | |
| 26 | 060923A | Nut retainers for access box frame (12/pkg) | | | |

NOTE: Refer to TECK flushometer repair parts and maintenance manual for additional parts and information.

^{*} Each individual sensor module requires its own 24VAC to 6VDC hardwire converter.

^{**} For valves manufactured before October 2014, you must replace both the sensor module and the cap/solenoid which are included in; UR Kit - 061284A or WC Kit - 061285A.

^{***} For valves manufactured before January 2013, you must replace the sensor module and the cap/solenoid, diaphragm assembly and the brass seat with O-ring which are included in; UR Kit - 061286A or WC Kit - 061287A.

| Table 1 - Cap/Pin/Diaphragm Configuration Table | | | | | | |
|---|--------------------|--|----------------------|--------------------|--|--|
| | Flush Volume | Cap/Solenoid & Regulating Screw Assembly (includes Cap, Solenoid, Regulating Screw) | Poppet Pin | Diaphragm Assembly | | |
| *UR - Fixed | **0.5L (0.125 gal) | 061341A | 060508A | 061324A | | |
| UK - Fixed | **1.9L (0.5 gal) | 061342A | 060507A | | | |
| UR - Adjustable | 1.9L (0.5 gal) | 061346A | | | | |
| | **4.2L (1.1 gal) | 061343A | 060507A & 062025A | 061323A | | |
| * W/C - Fixed | **4.8L (1.27 gal) | 061344A | | | | |
| | 6.0L (1.6 gal) | 061345A | | | | |
| W/C - Adjustable | 6.0L (1.6 gal) | 061169A | | | | |

NOTE: Must use all noted components listed in Table 1 to ensure correct flush volumes.

^{*} Fixed models have epoxy in the adjustment screw.

^{**} WaterSense® compliant when paired with a WaterSense fixture rated for the same flush volume.