

Electronic Flush Valves & Retrofit Kits

Trim Only for HARD WIRE operated electronic concealed flush valve for SIPHON JET URINAL with 3/4" BACK inlet-14" x 14" Front Access Cover

Model No: 1600T6403ATR

COMPLIES WITH:

- IAPMO certified.
- Complies to ASSE 1037
- ADA compliant and meets Handicapped Accessibility Standard ASME 117.1 of less than 5 lbs operating force
- (Contact Delta Representative for State and/or Local Approvals)





NOTES:

(3) For separate purchase of a Hardwire Converter with Battery Back-up, see061047A

SPECIFICATION:


- Trim Only (Roughin must be purchased separately)
- H2Optics® sensor and electronic manual override button integral in recessed mount stainless steel wallplate
- Stainless steel vandal resistant mounting screws for wallplate
- Preset blocking time, built-in activation delay.
- HARD WIRE operated
- For SIPHON JET URINAL with 3/4" BACK inlet
- With 14" x 14" Front Access Wallplate
- External water conserving flush adjustment: Factory Set to 1.9 Litre (0.5 GAL.) FIELD ADJUSTABLE from 0.47 to 3.78 Litre (1/8 to 1.0 GAL.)

OPERATION:

- 8 second blocking time
- 0 second activation delay
- Adjustable flush volume using adjustment screw on flush valve
- Selectable sensing distance: 12" to 28" in 4" increments. Factory set to 20"
- 24 hour courtesy flush factory set to off.
- Adjustable flush volume using adjustment screw on flush valve

(Dimensional drawing on following page)



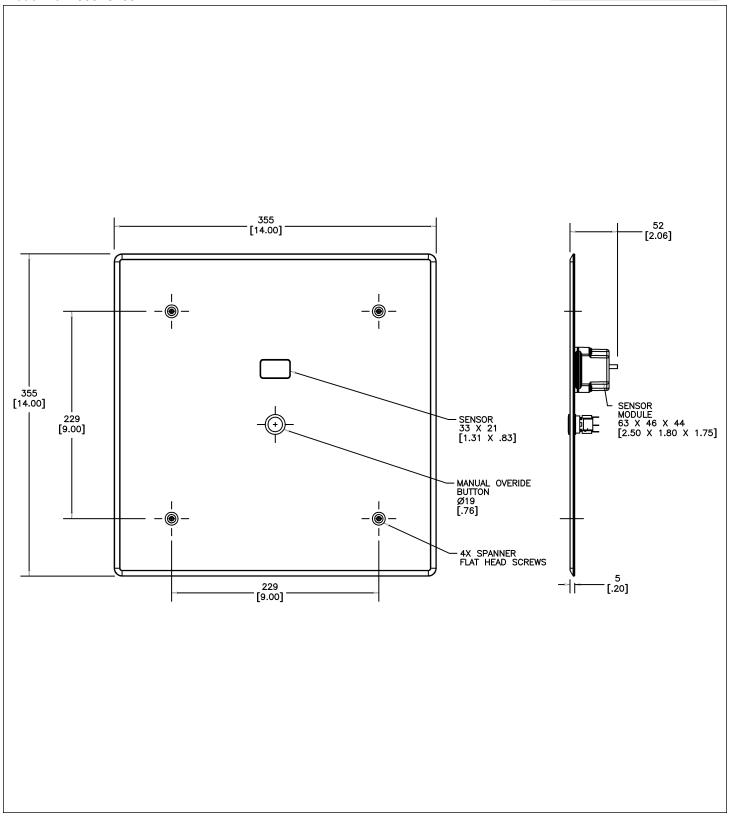

Delta reserves the right (1) to make changes to specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference. Measurement may vary plus or minus 6mm(0.25"). Mounting locations are suggested only. Check with local codes for requirements in your area. This spec was produced April 14, 2021.