


Submitted Model No.: \_\_\_\_\_

Specific Features: \_\_\_\_\_



▲ Designate proper finish suffix

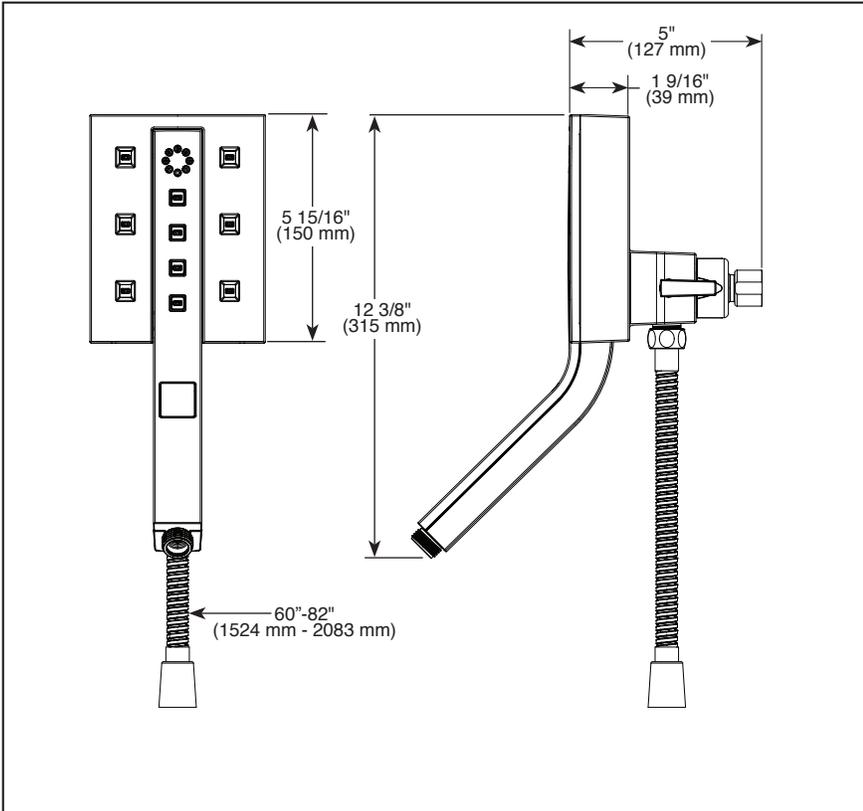

see what Delta can do™

**IN2ITION®**

- H<sub>2</sub>Okinetic® 2-In-1 Shower
- 4 Spray Settings

**FEATURES:**

- H<sub>2</sub>Okinetic® PowerDrench Spray
- Push Button Selection
- Certified Dual Check Valves
- MagnaTite® Docking
- Lumicoat™ Finish (-PR models only)
- Lumicoat™ Finishes easily wipe clean without cleaners and chemicals on the products most commonly touched areas

**STANDARD SPECIFICATIONS:**

- Max. flow rate 1.75 gpm at 80 psi, 6.6 L/min @ 550 kPa (58473-▲ and 58473-▲-PR)
- Max. flow rate 2.5 gpm at 80 psi, 9.5 L/min @ 550 kPa (58473-▲25 and 58473-▲-PR25)
- Integrated handshower docks securely into showerhead when not in use
- 3-way diverter for extra spray options
- Fixed showerhead and handshower all in one
- Change spray modes with push button
- 60"-82" (1524 mm - 2083 mm) stretchable metal hose
- 4 spray settings - not a positive shut-off
- Lumicoat™ is not applied to the shower hose

**WARRANTY**

- Parts and Finish - Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date of purchase.
- Electronic Parts and Batteries (if applicable) - 5 years from the date of purchase; or for commercial purchasers, 1 year from the date of purchase. No warranty is provided on batteries.



**COMPLIES WITH:**

- ASME A112.18.1 / CSA B125.1
- EPA WaterSense® - Applies to 58473-▲ & 58473-▲-PR