



TECK[®]
COMMERCIAL

Electronic Exposed TECK[®] Flush Valves for Sloan[®] / Zurn[®] Stops

❑ 81T201HWA-30

**Exposed Hardwire Operated
1-1/2" Top Inlet Closet Fixture
LESS STOP, WITH MODIFIED TAIL TO FIT SLOAN[®]/ZURN[®] STOP**

- Polished chrome plated vandal resistant metal cover with top mounted sensor operated **H₂OPTICS[®]** electronics
- Right or left-hand supply installation
- ADA compliant, automatic operation hardwire powered infrared sensor
- Scratch resistant replaceable lens window
- Supplied with an advanced infrared sensor activated flush system that uses precise user distance measurements along with a bowl length setting to activate the correct flush for each usage
- Hardwire Adaptor 24VAC to 6VDC converter (supplied)
- Vandal resistant copper tube conduit
- Optional 24 hour automatic flush factory set to OFF
- Set-up sensor range adjustment indicator lights
- 24 VAC input, 6 second arming delay
- Electronic operated non-hold-open **metal** override button with 5 second lockout
- (110 to 24 VAC Transformer not included. See selection below for additional part number.)
- Quiet action, TECK[®] exposed diaphragm flush valve
- Chloramine resistant diaphragm
- Forged brass diaphragm retainer
- Renewable seat
- Polished chrome plated body
- **External water conserving flush adjustment**, factory set to 6 litre (1.6 gal.) (except -48 and -6 models)
- Adjustable 114mm to 131mm (4.5" to 5.18") inlet/valve outlet centers
- Vacuum breaker
- Spud flange, concealed spud nut, and 292mm (11-1/2") outlet tube
- **Recommended water supply:**
Minimum flowing pressure – 25 psi (172 kPa)
Minimum flow rate – 25 gpm (95 L/min)

❑ 81T201HWA-30-6

Same as 81T201HWA-30,
but **Not Field Adjustable**

❑ 81T201HWA-30-13

Same as 81T201HWA-30, but factory set to 13 litre (3.4 gal.)

❑ 81T201HWA-30-48

Same as 81T201HWA-30, but factory set to 4.8 litre (1.27 gal.), **Not Field Adjustable**



Available Options for Field Conversion

- ❑ **061047A Hardwire with Battery Backup**
See DSP-BB for detailed specification.

✓	TRANSFORMERS	
	060704A	110 to 24VAC Class II 20VA (for up to 5 Electronic Valves)
	060771A	110 to 24VAC Class II 20VA (for up to 10 Electronic Valves)

Approvals:

- IAPMO listed to ASSE 1037/
ASME A112.1037/ CSA B125.37
- Indicates compliance to
ICC/ANSI A117.1

(Contact Delta Representative for
State and/or Local Approvals.)

Patented




Engineer/Architect Approval

Model Specified:


Approval:

Date:

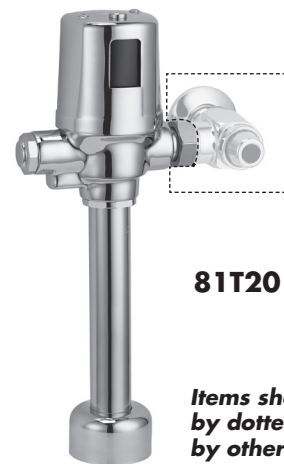

81T201HWA-30

*Items shown outlined
by dotted lines supplied
by others.*

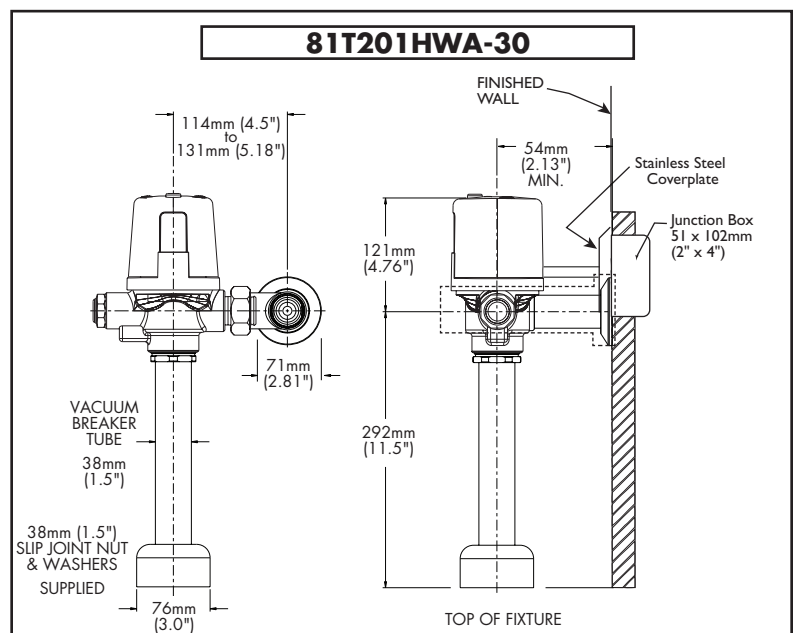

Note: For high and low pressure applications, please see page
FEA-81T High Water Pressure note for more details.

Verify flow requirements with bowl manufacturer.

Note: Measurements may vary ± 6 mm (0.25")

Refer to www.specselect.com for individual models.

Note: Use this page as a product submittal sheet.