


Submitted Model No.: _____

Specific Features: _____

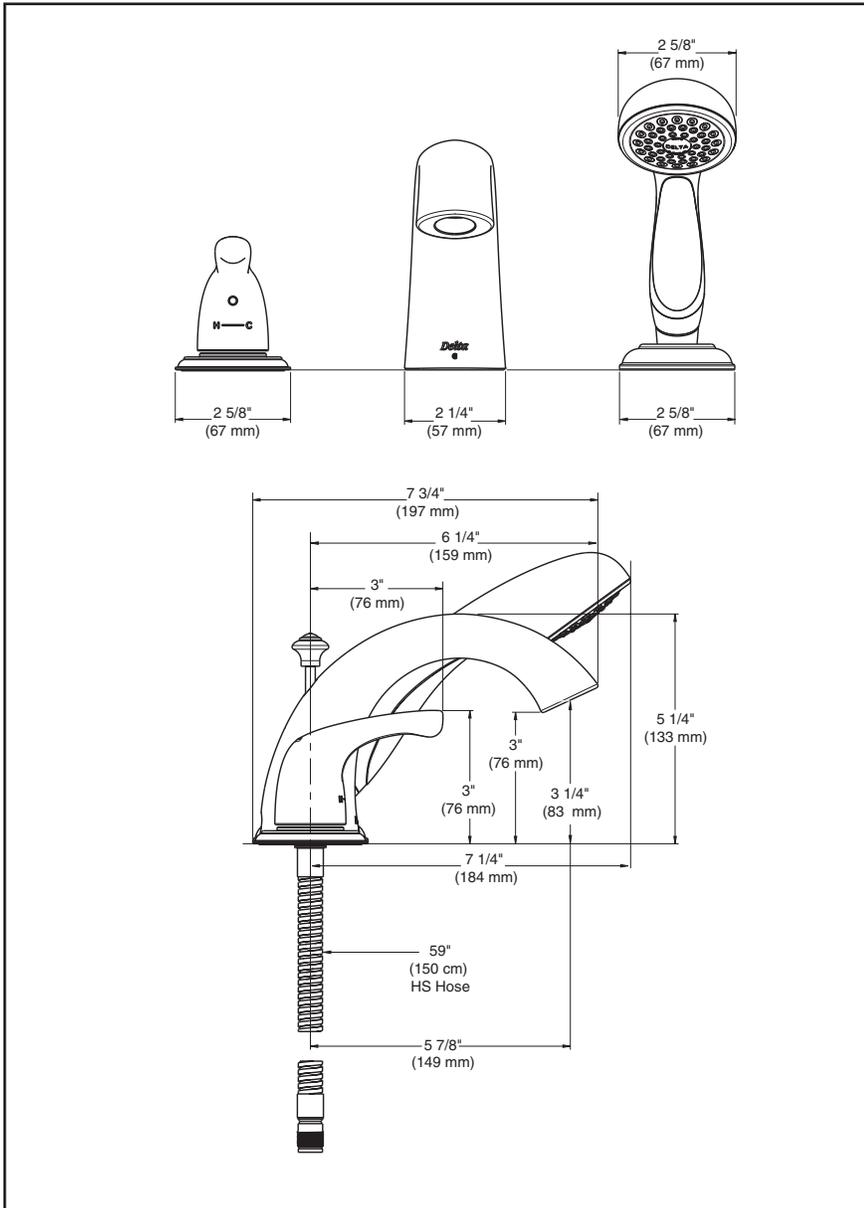

▲ Designate proper finish suffix

◆ Your Delta Faucet hand shower incorporates a backflow protection system that has been tested to be in compliance with ASME A112.18.3, ASME A112.18.1/CSA B125.1. It incorporates two certified check valves in series, which operate independently and are integral, non-serviceable parts of the wand assembly.



THREE HOLE ROMAN TUB FAUCET WITH HAND SHOWER TRIM

- Canadian Classic Bath Collection
- Single Handle Roman Tub Faucet with Hand Shower
- Three Hole Installation
- Rough-In Kit Must Also be Ordered to Complete Installation

STANDARD SPECIFICATIONS:

- Hand Shower maximum flow rate 1.75 gpm @ 80 psi, 6.6 L/min @ 550 kPa.
- Trim only for single handle Roman Tub Faucet with Hand Shower.
- Temperature only controlled with handle.
- Hot/cold indicator.
- Rough-in Kit must be ordered to complete installation:
 - R3707, R3707-MF and R3707-PX for flexible rough-in.
 - R3716, R3716-MF and R3716-PX for fixed rough-in.
 There are separate specification sheets on each rough-in kit, if more detail is required.
- Hand Shower includes double check valves for backflow prevention.

NOTES

- **Rough-in must be installed so handle is on the left of the spout with the spout facing forward. Refer to M&I for more details. Spacing between hand shower and spout could be 5" - 8" (127 mm - 203 mm).**

WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes: or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.



COMPLETE VALVE COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- Indicates ADA compliance to ICC/ANSI A117.1 – Valve Only



55 E. 111th Street, Indianapolis, Indiana 46280
 350 South Edgevare Road, St. Thomas, ON N5P 4L1
 © 2018 Masco Corporation of Indiana