




ELUME LED LPDL (Low Profile Downlight) is a simple and economical solution for any downlight application where an even light is needed. Being less than 1" thick, this thin recessed downlight can be installed in all types of ceiling.

# LED Downlights



4" Round

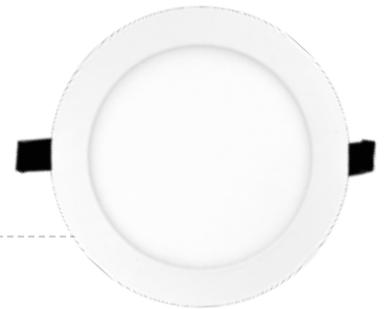

6" Round

Order code	Description	Watts (W)	Volts (VAC)	Colour temp. (K)	Lumen output (lm)	CRI	Life L70 (hrs)	Beam angle (°)	Finish	Traditional equivalent (W)	Case qty (master)
<b>4" Round</b>											
66206	LPDL4/RND/11W/30K/WH/ELUME	11	120	3 000	750	≥80	36 000	100	White	60	32
66207	LPDL4/RND/11W/30K/BN/ELUME	11	120	3 000	700	≥80	36 000	100	Brushed nickel	60	32
66208	LPDL4/RND/11W/40K/WH/ELUME	11	120	4 000	750	≥80	36 000	100	White	60	32
66209	LPDL4/RND/11W/40K/BN/ELUME	11	120	4 000	700	≥80	36 000	100	Brushed nickel	60	32
<b>6" Round</b>											
66210	LPDL6/RND/14W/30K/WH/ELUME	14	120	3 000	1 000	≥80	36 000	100	White	75	24
66211	LPDL6/RND/14W/40K/WH/ELUME	14	120	4 000	1 000	≥80	36 000	100	White	75	24



AIRTIGHT



DAMP



DIMMABLE



RATED



QUICK CONNECT



5 YEARS WARRANTY



Intertek



ENERGY STAR

Lumen values are derived from photometric testing. For a complete list of compatible dimmers and ENERGY STAR qualified products, please visit [www.standardpro.com](http://www.standardpro.com)