



Heater Elements

**Glocoil®,
Heater Receptacle,
Lighter Element**


Heater Elements

FEATURES

- Used for testing equipment when additional wattage or amperage is needed.
- Shell constructed of high-temperature porcelain.
- Heater receptacle constructed of high-temperature porcelain.

Glocoil® Elements

Watts	Description	Catalog No.	
		120 Volts	220 Volts
600 to 660	Conical	415A-120-660	415A-220-660
1000	Conical	415A-120-1M	—
600 to 660	Straight	415-120	415-220
1000	Straight Industrial	411	411-2

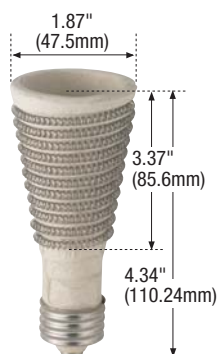

415A-120

Heater Receptacle

Rating Watts	V/AC	Description	Catalog No.
660	250	2 Piece Porcelain	602



602

Lighter Element

FEATURES

- For use where open flame is restricted as in prisons, laboratories and other institutions.

Lighter Elements

Rating Watts	V/AC	Description	Catalog No.
85	120	Medium Base	444-120



444-120

INDUSTRIAL
COMMERCIAL
RESIDENTIAL

V-7
ELECTRICAL
ACCESSORIES

TESTING & CODE COMPLIANCE

- Cat. No. 602:
UL Listed
(file no. E7430.
Meets all UL 496
requirements.
- CSA Certified
(file no. 1739
(6231-07)).
Meets all
CSA requirements,
C22.2 no. 43.
- NOM Certified.
- 415A-120 and
415-120 are CSA
Certified (file no.
2254 (2871-02)).